
 (L)	 	0	0





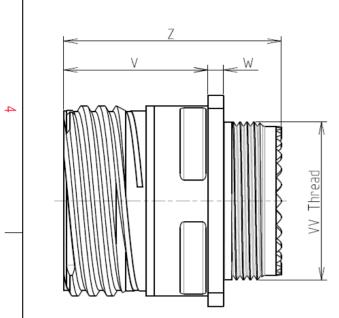

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 29.44 g ± 10%

8D 0

G

11

Κ

99

Ν


А

F

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

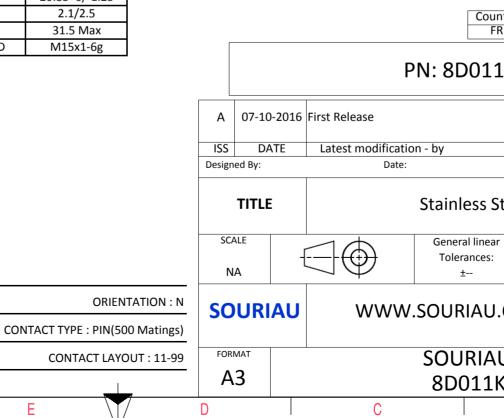

Φ		Þ				
			4			
AS EXAMPLE			3			
	itu ar damaga					
r any non-conform s which does not c er of the Parties or ndation, technical untry Juris	omply with by a third party					
1K99AN	Not Listed		2			
		MOD N°				
	CUSTOMER DRAV					
Steel Receptacle 8D series						
ar :	NPRDS / PROJECT 859					
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N° K99AN-C		SHEET 1/2				
В		A	J			

	Ξ	۵	нт — — — — — — — — — — — — — — — — — — —	m	D	0
		Contact Layout				Panel Cutou
4	-×	$ \begin{array}{c}                                     $			Λ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Conta positiv ID A B C C D E F G	(Insert arrangement 11-99)           Location           X-axis           (mm)         (mm)           +.065 (1.65)         +.113 (2.87)           +.130 (3.30)         +.000 (0.00)           +.065 (1.65)        113 (2.87)          065 (1.65)        113 (2.87)          065 (1.65)        113 (2.87)          130 (3.30)         +.000 (0.00)          065 (1.65)         +.113 (2.87)          130 (3.30)         +.000 (0.00)          065 (1.65)         +.113 (2.87)          000 (0.00)         +.000 (0.00)	_		Σ	ØT_
ယ	Shell Arrangement Numb size no. conto 11 -99 7	acts contacts rating location				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendat
S						PN: 8D011k
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					SCALE	Stainless Ste
<u> </u>					NA	U WWW.SOURIAU.C
					FORMAT A3	SOURIAU 8D011K9
	Н	G	F	E	D	C

