

—	۵	П	m	D	0



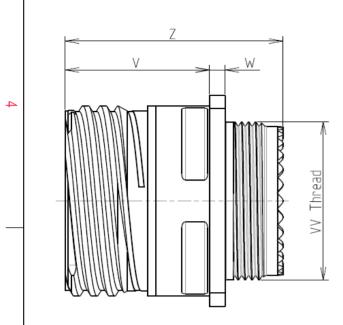

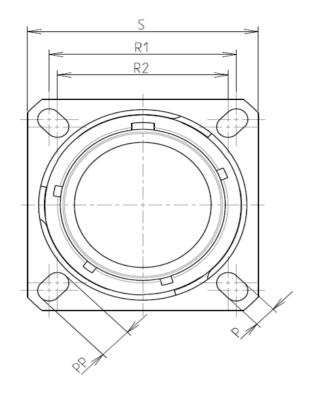

Keying Shown as example

CHARACTERISTICS

ω

 \sim

_

-Mass

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	: -65°C to +175°C
-Salt Spray	: 500 hours

: 14.89 g ± 10%

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

	0		Φ		А					
							4			
	LAY	YOUT SHOWN AS EXA	MPLE				3			
	due to a use the Specifications	not be liable for any n of the Products which issued by either of th onal recommendation Country	n does not com ne Parties or by n, technical no	nply with y a third party						
	Р	FR N: 8D011W		Not Listed			2			
A 07-10-2016 ISS DATE Designed By:	First Release Latest modificatio Date:	in - by		CUSTOMER	DRAWING	MOD N°	-			
TITLE Aluminium Receptacle 8D series										
SCALE NA	General linear Tolerances: ±	nces: 859			rtucf	1				
SOURIAU	WWW	.SOURIAU.CO		it must	ment is the prope SOURIAU not be reproduced ated without pern	d or				
FORMAT A3		SOURIAU E 8D011W0				SHEET 1/2				
D	С		В		А					

	BASIC SERIES:	8D (0 -	11	w	04	В	E				SCALE	L	$\square \square$	Genera Tolera	
-	SHELL TYPE : Square Flange R	eceptacle										NA		$\square \Psi$	±·	
	CONTACT TYPE : Standard Cu	rimp Contact								0	RIENTATION : E	SOUR	ΔIJ	www	SOUR	
	SHELL SIZE : 11								CONTAC	T TYPE : SOCKE	T(500 Matings)					
	PLATING : W = Olive dra	ab Cadmium								CONTACT I	AYOUT : 11-04	FORMAT		I	SOU	riau
												A3			8D0	11W
	Н	(G				F			E	\bigvee	D		С		

-	Ŧ	G	г	m	D	0
		Contact Layout				Panel Cutor
4		$ \begin{array}{ccc} \bullet^{D} & A \\ \bullet & \bullet \\ $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		on X-axis Y-axis (mm) +.065 (1.65) +.065 (1.65) +.065 (1.65)065 (1.65) 065 (1.65)065 (1.65) 065 (1.65) +.065 (1.65)			Ω –	ØT ØA
دى						Dim ØA ØAA R1 ØT
	L					
						SOURIAU shall not be liable for an due to a use of the Products wl the Specifications issued by either o (professional recommenda
N						Counti FR
					A 07-10-20	PN: 8D011
					ISS DATE Designed By:	
					TITLE	Aluminiun
→					SCALE NA	General linear Tolerances: ±
					SOURIA	
					FORMAT A3	SOURIAU 8D011W
	Н	G	F	E	D	C

