



Electrical specifications

Center Frequency: 5455 MHz
Bandwidth: 100 MHz min
Insertion loss: 3.2 dB typ (3.5 dB max)
Ripple in BW: 1.5 dB max
VSWR: 1.7 :1 dB max
Attenuation 1: 15 dB min @5355 MHz
Attenuation 2: 15 dB min @5555 MHz
In/Out Impedance: 50 Ohm
Input Power: 5 Watt max.

Mechanical


Mounting Method: SMT
Dimensions: 26.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -30°C to 85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

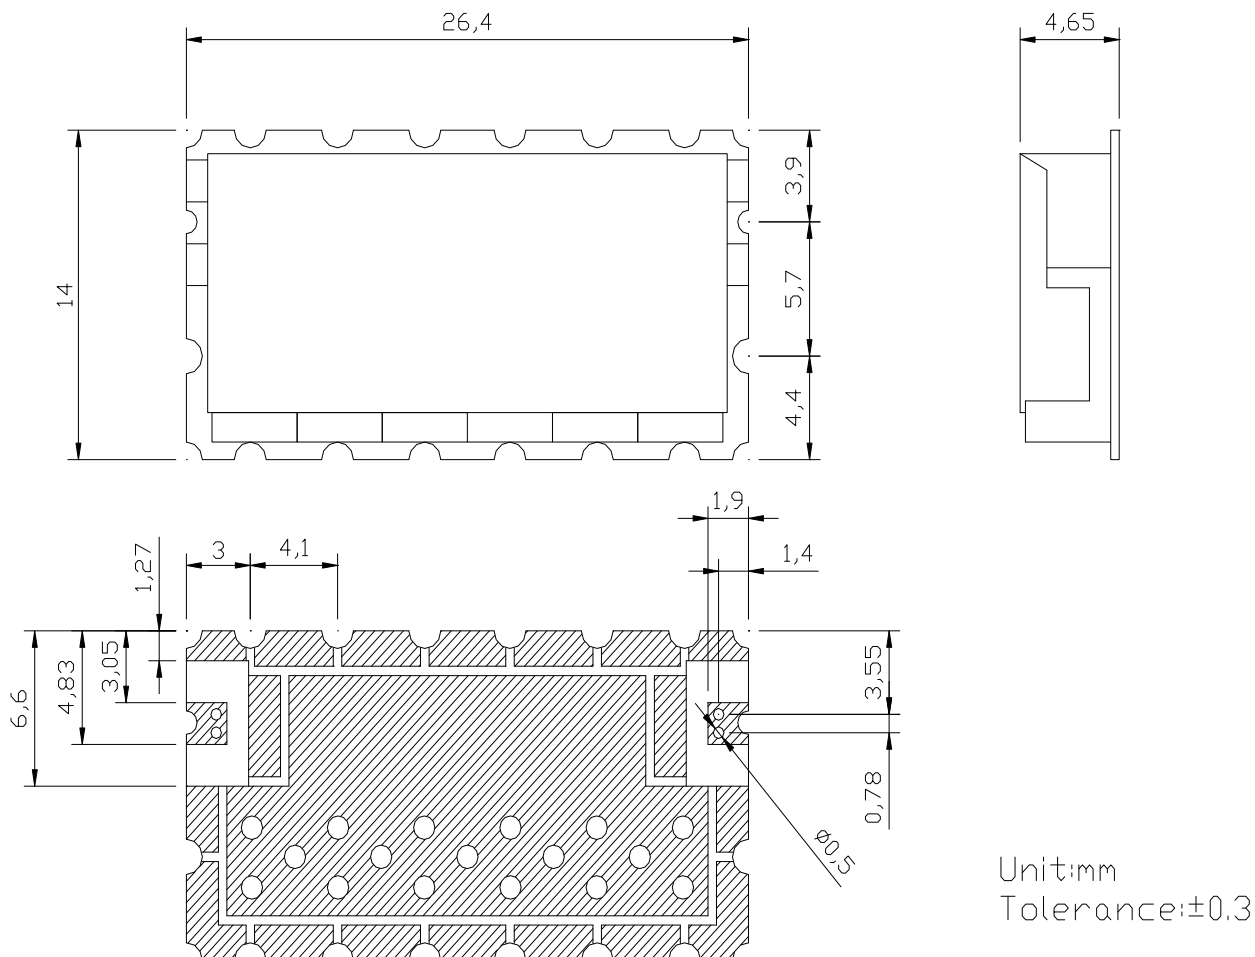

Unit:mm
Tolerance: ± 0.3