

6

5

4

3



2

1




APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

|     |       |             |          |      |
|-----|-------|-------------|----------|------|
| Rev | AWO # | Description | Date     | Appr |
| -   |       | RELEASED    | 11/26/18 |      |

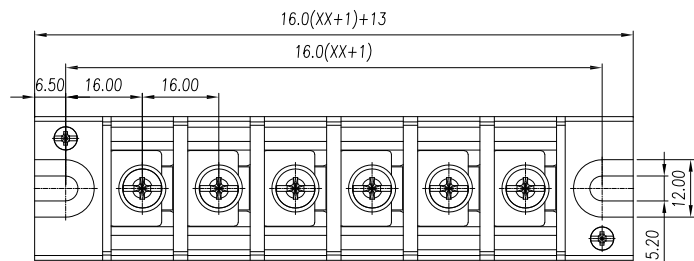

RECOMMENDED MOUNTING CUT-OUT

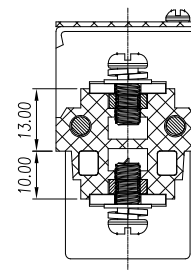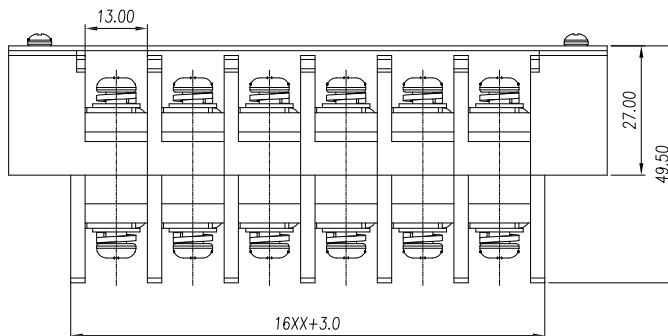

Poles: 01 thru 15

SPECIFICATIONS:

- Material:
- Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Copper Alloy, Tin plated
- Screw: M5 Steel, Nickel plated
- Electrical:
- Voltage rating: 600 V
- Current rating: 65 A
- Contact resistance: 20 mohms
- Insulation resistance: 1000 Mohms / DC500V
- Dielectric withstanding voltage: 2,500 VAC for 1 minute
- Mechanical:
- Wire Range: 14~6 AWG
- Torque: 2.5Nm/25.0lb.in
- Temperature Rating: -40°C to +130°C
- Environmental:
- Lead free, RoHS compliant.



| linear dimension (Tolerances Standard) |       |       |       |       |       |       |       | —    | ∕    | ⊥    |
|--|-------|-------|-------|-------|-------|-------|-------|------|------|------|
| variable                               |       | over  | over  | over  | over  | over  | over  |      | over | over |
| range                                  | to    | 6     | 10    | 30    | 60    | 100   | 160   | to   | 10   | 100  |
|  | to    | 10    | 30    | 60    | 100   | 160   | to    | 10   | 100  | to   |
| tolerance                              | ±0.20 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±1.60 | 0.10 | 0.30 | 0.60 |

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED

SEE CHART

**ADAM TECH INTERCONNECTS** 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

| APPROVALS |    | DATE     |
|-----------|----|----------|
| DRAWN     | AY | 11/26/18 |
| CHECKED   | AC | 11/26/18 |
| APPROVED  |    |          |

|       |               |        |  |              |  |
|-------|---------------|--------|--|--------------|--|
| TITLE |               |        | TERM. BLOCK, .630 [16.00] PITCH W/ CLEAR COVER |              |  |
| SIZE  | PART NO.      | REV.   |  |              |  |
| X     | TBU-XX-W3-CCS | -      |  |              |  |
| REF:  | S00067C       | SCALE: | NTS  | SHEET 1 OF 1 |  |

6

5

4

3

2

1