


LOC AI	DIST 00	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		A2		ECR-15-008704	10JUN15	LS	LB

# HTV10 HAND TOOL, MATE-N-LOK, 0.5-2.1 SQ.MM

FRONT VIEW

SIDE VIEW

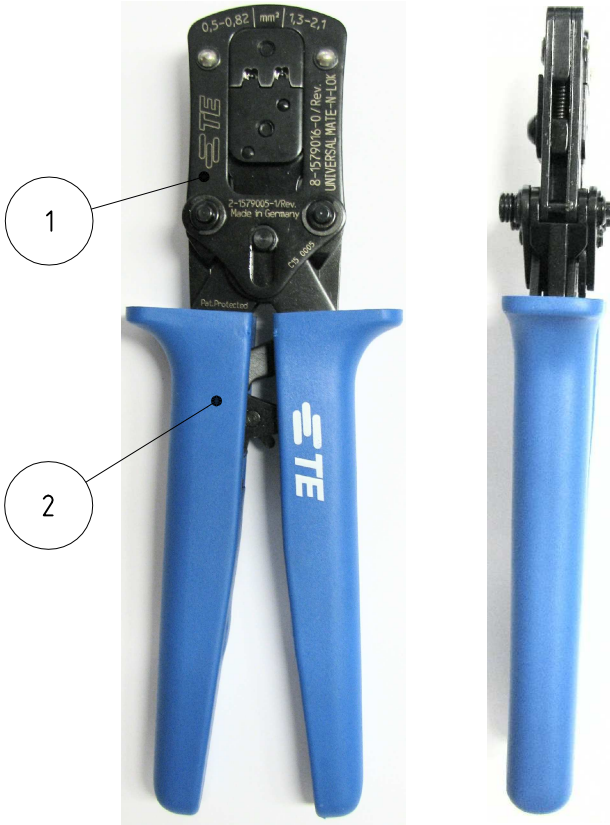

## Eigenschaften / Features

Der Crimpkopf verfügt über zwei Crimpnester in denen zwei Leitungsquerschnitte verarbeitet werden können. Die Kontakte werden über den Isolationsanschlag in die richtige Ausgangsposition positioniert.

Crimping head featured with two crimping nests to enable processing of two different wire sizes. Terminals will be correct inserted by insulation stop.

## Ersatzteil / Spare part

HTV10 CRIMP HEAD MATE-N-LOK, 0.5-2.1 SQ.MM  
- TE P/N 8-1579016-0

## Abmessungen / Dimensions:

Länge/Length: 195 mm  
Breite/Width: 64.5 mm  
Tiefe/Depth: 22 mm

## Stückliste / Parts list



POS	TE-P/N	REV	QTY	DESCRIPTION
1	8-1579016-0	A	1	HTV10 CRIMP HEAD MATE-N-LOK, 0.5-2.1
2	2-1579005-1	B	1	BASIC HAND TOOL GRIP, SHORT, C

CUSTOMER MANUAL:  
411-18582 / 1-744017-1

## Anwendungsbereich / Application range

Leiterquerschnitt Cross section range (in sq.mm)	Leitercrimpöhe Conductor Crimp Height ±0,05 (in mm)	Leitercrimpbreite Conductor Crimp Width gemessen an den Tangenten der Radien in (mm)	Isolationscrimpöhe Insulation Crimp Height ±0,05 (in mm)	Isolationscrimpbreite Insulation Crimp Width gemessen an den Tangenten der Radien in (mm)	TE P/N- Kontakt TE P/N- Contact UNIVERSAL MATE-N-LOK
0,5 - 0,82	1,22	2,27 F	2,56	3,3 F	926898
1,3 - 2,1	1,56		3,05		350547 350550

THIS DRAWING IS UNPUBLISHED.  
 BY TYCO ELECTRONICS CORPORATION.  
 ALL INTERNATIONAL RIGHTS RESERVED.  
 © COPYRIGHT -

DIMENSIONS: mm	DWN L.Sandhu	10FEB2015	MATERIAL	FINISH
	CHK C. Witt	10FEB2015	 TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C. Witt	10FEB2015		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC	APPLICATION SPEC	SIZE A4
	WEIGHT 0.29kg	DRAWING NO 1579024-2	RESTRICTED TO -	
	CUSTOMER DRAWING	SCALE	SHEET 1 OF 1	REV A2