

Data sheet

Order No.: 1716958

Type: LPCH 6/ 5+6-ST-7,62

PCB hybrid connector, Push-in spring connection

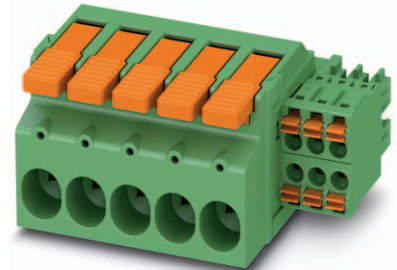


Figure shows a 5+6-pos. version

1 Main features



- | | | | |
|---------------------------|---------------------------|------------------------|---------------------|
| • No. of pos. | 11 | • Nominal current | 41 A |
| • Conductor cross section | 6 mm ² | • Nominal voltage | 1000 V |
| • Color | green (6021) | • Connection direction | 0° |
| • Pitch | 7.62 mm | • Type of packaging | packed in cardboard |
| • Connection method | Push-in spring connection | | |

2 Your advantages

- ✓ Tool-free lever principle enables time-saving connection and release of conductors with/without ferrules
- ✓ Clear lever positions provide reliable feedback on opened or closed clamping spaces
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Time-saving push-in connection when lever is closed



Make sure you always use the latest documentation.


It can be downloaded at: phoenixcontact.net/product/1716958

3 Table of contents

| | | |
|----|---|----|
| 1 | Main features..... | 1 |
| 2 | Your advantages | 1 |
| 3 | Table of contents | 2 |
| 4 | 3D model in PDF can be activated (Acrobat Reader only)..... | 3 |
| 5 | General Technical Data | 4 |
| 6 | Material properties..... | 5 |
| 7 | Dimensions..... | 6 |
| 8 | Series drawing..... | 7 |
| 9 | Packaging information | 8 |
| 10 | Application..... | 8 |
| 11 | General tests | 9 |
| 12 | Mechanical tests..... | 9 |
| 13 | Electrical tests | 11 |
| 14 | Current carrying capacity/derating curves | 12 |
| 15 | Environmental and durability tests | 13 |
| 16 | Classification for connectors..... | 13 |
| 17 | Approvals | 13 |
| 18 | Commercial Data..... | 14 |
| 19 | Accessories..... | 14 |
| 20 | Combination tests..... | 15 |

1716958 LPCH 6/ 5+6-ST-7,62

4 3D model in PDF can be activated (Acrobat Reader only)

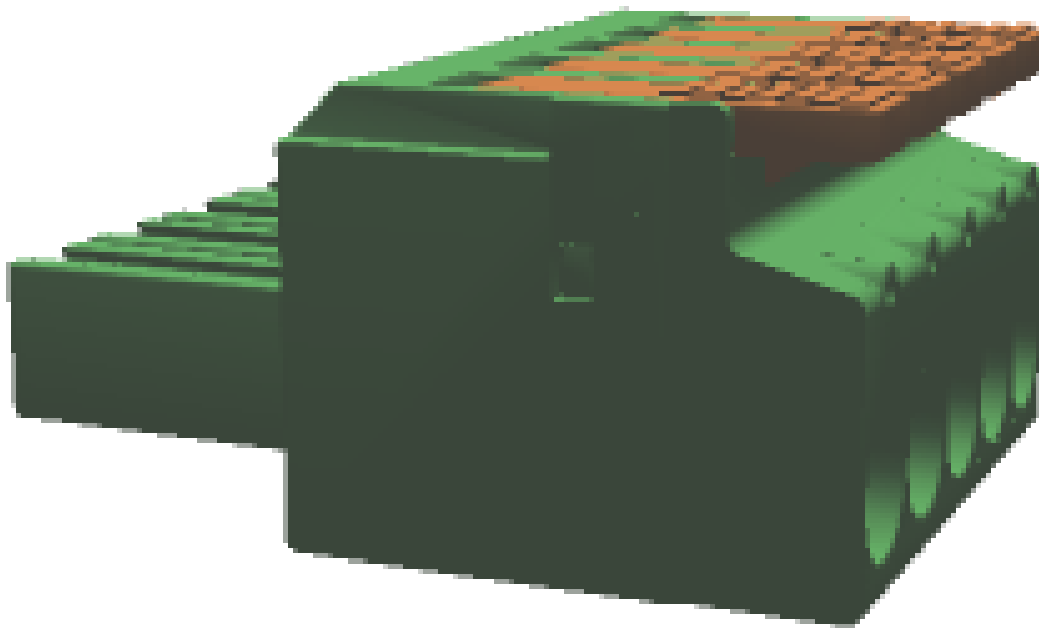

1716958 LPCH 6/ 5+6-ST-7,62**5 General Technical Data****5.1 item properties**

| | |
|--|-------------------------|
| Order No. | 1716958 |
| Type | LPCH 6/ 5+6-ST-7,62 |
| Plug-in system | POWER COMBICON 6 Hybrid |
| Product type | PCB hybrid connector |
| Type of contact | Female connector |
| Range of articles | LPCH 6/...-ST |
| Number of positions | 11 |
| Number of connections | 11 |
| Number of potentials | 11 |
| Type of locking | without |
| | without |
| Connection direction of the connector to the PCB | 0 ° |

| | Power | Signal |
|-----------------------|---------------------------|---------------------------|
| Pitch | 7.62 mm | 3.81 mm |
| Connection method | Push-in spring connection | Push-in spring connection |
| Number of levels | 1 | 2 |
| Number of positions | 5 | 6 |
| Number of connections | 5 | 6 |
| Number of potentials | 5 | 6 |

5.2 Connection capacity

| | Power | Signal |
|---|---|--|
| Conductor cross section, solid | 0.75 mm ² ... 10 mm ² | 0.2 mm ² ... 1.5 mm ² |
| Conductor cross section, flexible | 0.75 mm ² ... 6 mm ² | 0.2 mm ² ... 1.5 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.75 mm ² ... 6 mm ² | 0.25 mm ² ... 1.5 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve | 0.75 mm ² ... 6 mm ² | 0.25 mm ² ... 1 mm ² |
| Cylindrical gauge a x b / diameter | 4.3 mm x 4.0 mm / 4.0 mm | 2.4 mm x 1.5 mm / 1.5 mm |
| Stripping length | 18 mm | 10 mm |

5.3 Connection capacity AWG

| Connection data AWG | Power | Signal |
|-----------------------------|----------|-----------|
| Conductor cross section AWG | 18 ... 8 | 24 ... 16 |

1716958 LPCH 6/ 5+6-ST-7,62**6 Material properties****6.1 RoHs/WEEE compliant**

| | |
|------|--|
| Note | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201 |
|------|--|

6.2 Material of metal parts

| | Power | Signal |
|-------------------------|-------------------|--------------------|
| Contact material | Cu alloy | Cu alloy |
| Terminal point surface | Tin (4 - 8 µm Sn) | Tin (4 - 8 µm Sn) |
| Surface contact area | Tin (4 - 8 µm Sn) | Tin (4 - 8 µm Sn) |
| Surface characteristics | Tin-plated | hot-dip tin-plated |

6.3 Material Kunststoffteile

| | Power | Signal |
|--|--------------|--------------|
| Insulating material | PA GF | PA |
| Insulating material group | I | I |
| CTI according to IEC 60112 | 600 | 600 |
| Flammability rating according to UL 94 | V0 | V0 |
| Color | green (6021) | green (2003) |

6.4 Insulation material specifications for actuating element

| | Power | Signal |
|--|---------------|---------------|
| Insulating material | PA GF | PBT |
| Insulating material group | I | I |
| CTI according to IEC 60112 | 600 | 600 |
| Flammability rating according to UL 94 | V0 | V0 |
| Color | orange (2003) | orange (2003) |

1716958 LPCH 6/ 5+6-ST-7,62


7 Dimensions

7.1 Dimensions for the product

| | |
|--------------|----------|
| Length | 48 mm |
| Width | 51.73 mm |
| Total height | 35.65 mm |
| Dimension a | 30.48 mm |

1716958 LPCH 6/ 5+6-ST-7,62

8 Series drawing

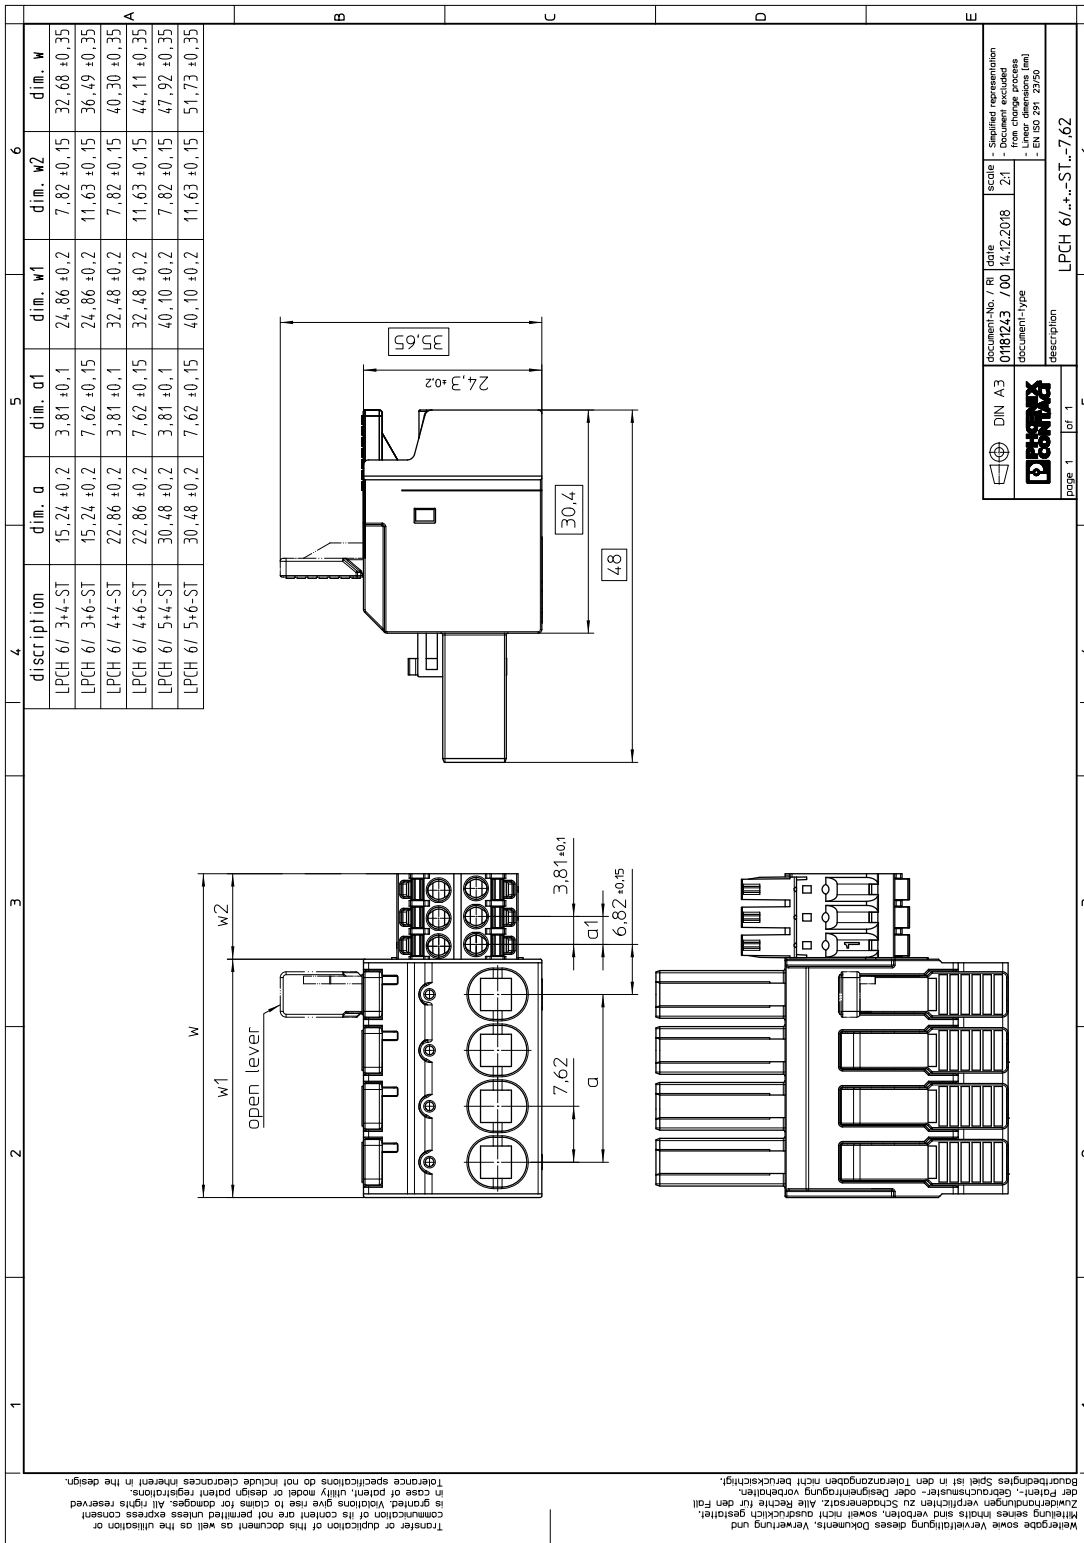

1716958 LPCH 6/ 5+6-ST-7,62**9 Packaging information**

| | |
|--------------------|---------------------|
| Type of packaging | packed in cardboard |
| Pieces per package | 25 |

10 Application**10.1 Temperature limit values**

| | |
|---|--|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Ambient temperature (assembly) | -5 °C ... 100 °C |
| Ambient temperature (operation) | -40 °C (dependent on the derating curve) |

1716958 LPCH 6/ 5+6-ST-7,62**11 General tests****11.1 Specification**

| | |
|-------------------|----------------------|
| Specification | IEC 61984 |
| Specification | IEC 60999-1 |
| Brief description | PCB hybrid connector |

12 Mechanical tests**12.1 Check for damage to conductor or loosening**

| | |
|---------------|---------------------|
| Result | Test passed |
| Specification | IEC 60999-1:1999-11 |

12.2 Pull-out test

| | |
|--|--|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |
| Conductor cross section/conductor type/tractive force actual value | 0.75 mm ² / solid / > 30 N |
| Conductor cross section/conductor type/tractive force actual value | 0.75 mm ² / flexible / > 30 N |
| Conductor cross section/conductor type/tractive force actual value | 10 mm ² / solid / > 90 N |
| Conductor cross section/conductor type/tractive force actual value | 6 mm ² / flexible / > 80 N |

12.3 Repeated connection and disconnection

| | |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |

12.4 Conductor connection

| | |
|---------------|---------------------|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |

12.5 Mechanical test group A

| | |
|-------------------------------------|------------------------|
| Specification | IEC 61984:2008-10 |
| Visual examination | Test passed |
| Specification | IEC 60512-1-1:2002-02 |
| Dimensional test | Test passed |
| Specification | IEC 60512-1-2:2002-02 |
| Resistance of marking | Test passed |
| Specification | IEC 60068-2-70:1995-12 |
| Insertion and withdrawal force | Test passed |
| Specification | IEC 60512-13-2:2006-02 |
| No. of cycles | 25 |
| Insertion strength per pos. approx. | 7 N |
| Withdraw strength per pos. approx. | 4 N |

1716958 LPCH 6/ 5+6-ST-7,62

| | |
|-----------------------------|------------------------|
| Polarization and coding | Test passed |
| Specification | IEC 60512-13-5:2006-02 |
| Test force | 20 N |
| Contact retention in insert | Test passed |
| Specification | IEC 60512-15-1:2008-05 |
| Test force per pos. | 20 N |

1716958 LPCH 6/ 5+6-ST-7,62**13 Electrical tests****13.1 Electrical data**

| | |
|---|--------------------------|
| Rated current / conductor cross section | 41 A / 6 mm ² |
| Rated insulation voltage (III/2) | 1000 V |
| Rated surge voltage (III/2) | 8 kV |
| Contact resistance | 0.42 mΩ |
| Degree of pollution | 2 |

13.2 Air and creepage distances

| | | | |
|---|----------------------|--------|--------|
| Component | PCB hybrid connector | | |
| Specification | IEC 60664-1:2007-04 | | |
| Mains type | unearthed mains | | |
| Insulating material group | I | | |
| Comparative tracking index (IEC 60112:2003-01) | CTI 600 | | |
| Rated insulation voltage | 800 V | 1000 V | 1000 V |
| Rated surge voltage | 8 kV | 8 kV | 6 kV |
| Degree of pollution | 3 | 2 | 2 |
| Overvoltage category | III | III | II |
| Minimum clearance case A (inhomogeneous field) | 8 mm | 8 mm | 5.5 mm |
| Minimum value of the creepage path requirement in acc. with table | 10 mm | 5 mm | 5 mm |

13.3 Electrical function

| | |
|-----------------------------------|---|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |
| Voltage drop | Voltage drop (U) after the load ≤ 15 mV |
| Conductor cross section, flexible | 0.75 mm ² ... 6 mm ² |
| Conductor cross section, solid | 0.75 mm ² ... 10 mm ² |

13.4 Temperature cycles


| | |
|--------------------------------------|--|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |
| Voltage drop | Voltage drop (U) after the load ≤ 22.5 mV or 1.5 x U _{after 24 h} The small value is to be used. |
| Test current (minimum cross section) | 9 A DC |
| Test current (maximum cross section) | 41 A DC |
| Temperature cycles | 192 |
| Conductor cross section, flexible | 0.75 mm ² ... 6 mm ² |
| Conductor cross section, solid | 0.75 mm ² ... 10 mm ² |

1716958 LPCH 6/ 5+6-ST-7,62

14 Current carrying capacity/derating curves

| | |
|-------------------------|---|
| Specification | IEC 61984:2008-10 |
| Note | Representation based on IEC 60512-5-2:2002-02 |
| Reduction factor | 0.8 |
| Number of positions | See diagram |
| Conductor cross section | 6 mm ² |

Type: LPCH 6/...+...-ST-7,62 with PCH 6/...+...-G-7,62

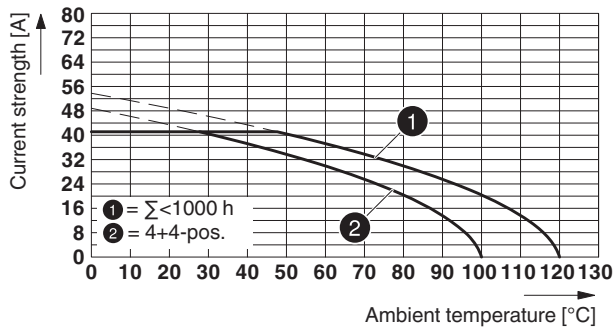

| | |
|--|-----------------------|
| Insulation resistance | |
| Specification | IEC 60512-3-1:2002-02 |
| Result | Test passed |
| Insulation resistance, neighboring positions | > 5 M Ω |

1716958 LPCH 6/ 5+6-ST-7,62**15 Environmental and durability tests****15.1 Vibration test**

| | |
|------------------------|--|
| Specification | IEC 60068-2-6:2007-12 |
| Result | Test passed |
| Frequency | 10 - 150 - 10 Hz |
| Sweep speed | 1 octave/min |
| Amplitude | 0.35 mm (10 - 60.1 Hz) |
| Acceleration | 5 g (60.1 - 150 Hz) |
| Test duration per axis | 2.5 h |
| Test directions | X-, Y- and Z-axis |
| Note | The connected conductor loops were guided to the test sample at a distance of approx. 10 cm. |


16 Classification for connectors

| | |
|-----------------------------------|--|
| Specification | IEC 61984:2008-10 |
| Main features | Connectors without switching capacity (COC) |
| Construction form | Fixed connectors |
| Strain relief elements | without strain relief |
| Connection method | Can be reconnected |
| Protection against electric shock | not encapsulated - back of hand safety when plugged in |
| Protective conductor | without PE |
| Lock | no |
| Connection method | Screwless terminal points |

16.1 Insulation resistance

| | |
|--|-----------------------|
| Specification | IEC 60512-3-1:2002-02 |
| Result | Test passed |
| Insulation resistance, neighboring positions | > 5 MΩ |

17 Approvals

| | | | | |
|--|-------|-------|-------|--|
| cULus Recognized  | | | | |
| Use group | B1 | F | F1 | |
| mm ² /AWG/kcmil | 24-16 | 18-8 | 24-16 | |
| Voltage | 150 V | 600 V | 160 V | |
| Current | 6 A | 35 A | 6 A | |

1716958 LPCH 6/ 5+6-ST-7,62**18 Commercial Data**



| | |
|--------------------|--|
| Order No. | 1716958 |
| Type | LPCH 6/ 5+6-ST-7,62 |
| Pieces per package | 25 |
| Net weight | 2.22 g |
| GTIN | 4055626522586 |
| | Information that applies locally, see link on page 1 |
| Country of origin | Information that applies locally, see link on page 1 |

19 Accessories

| Description | Order No. | Type |
|--|-----------|---------------------|
| Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red | 1701967 | CP-PC RD |
| | 3200603 | Al 6 -18 YE |
| Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm ² ... 6 mm ² , also for TWIN ferrules up to 2 x 4 mm ² , automatic cross section adjustment, lateral insertion, equipped with fall protection | 1213144 | CRIMPFOX CENTRUS 6S |
| Stripping tool, for cables and conductors from 0.02 - 10 mm ² , self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm ² stranded/1.5 mm ² solid, replaceable stripping blade | 1212150 | WIREFOX 10 |

1716958 LPCH 6/ 5+6-ST-7,62

20 Combination tests

**LPCH 6/..-ST**

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

Polarization when inserted
Requirement >20 NContact holder in insert
Requirements >20 N**Durability tests (B)**Contact resistance R_1

Insertion/withdrawal cycles

Contact resistance R_2 Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu\text{s})$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ **Thermal tests (C)**

Tested number of positions

Tested conductor cross section

Test current

Upper limiting temperature
Requirements < 100°C**Climatic tests (D)**

Test sequence 1: low temperature storage

Test sequence 2: heat storage

Test sequence 3: noxious gas storage
(ISO 6988)Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu\text{s})$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ **Environmental and endurance tests (E)**

Specification

Degree of protection

PCH 6/..-G

IEC 61984

approx. 7 N / 4 N

Test passed

Test passed

0.42 m Ω

25

0.46 m Ω

7.3 kV

3.31 kV

4

6 mm²

41 A

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

7.3 kV

3.31 kV

IEC 61984:2008-10

Back of hand safety with
IP10 access probe