





ISSUE NUMBER	
ORIGINAL	(1)

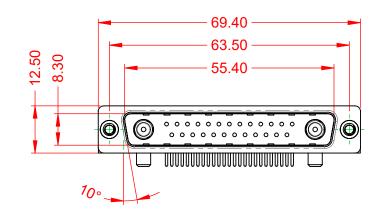




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

10.67 Θ 13.20

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTAC 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.



				SW REFERENCE NO.: 629 COMBO ASSEMBLY					
COMBINATION D-SUB			DRAWN: C.B			DATE: JAN. 01/2019		19	
			CHECKED			DATE:			
EDAC	INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:	1)	SHEET	1 0)F	2
TORONTO, CANA		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING	NUMBER:	629-27W2	9-27W2640-4TC ISSUE			
YOUR CONNECTION TO QUALITY & S	Y & SERVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. PART NUM				629-27W2	2640-4TC			1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

OPERATING TEMPERATURE:

.XX ±0.13 .XXX ±0.05

IN DIELECTRIC WITHSTANDING VOLTAGE: СТ

1000V AC rms

