



	ISSUE NUMBER
ORIGIN	IAL

(1)

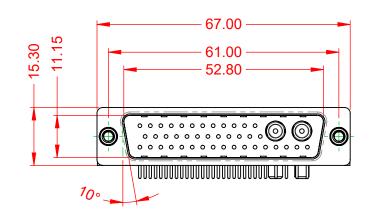




.XX ±0.13 .XXX ±0.05



MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



(	OPERATING TEMPERATURE:	-55°C ~ 125°C	
	POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)	
	SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.	•
	NSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.	

WITHSTANDING VOLTAGE:

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
		(	CHECKED:	DATE:		
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
			DRAWING NUMBER: 629-43W	2640-7T4	ISSUE	
			PART NUMBER: 629-43W	2640-7T4	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

