
Ξ	G	П	m	C C





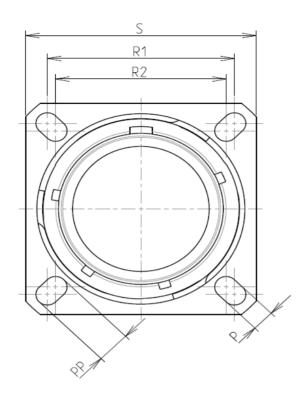

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 105.91 g ± 10%			

8D 0

G

21

S

48

S

F

Ν


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : N

CONTACT LAYOUT : 21-48

CONTACT TYPE : SOCKET(500 Matings)

Е



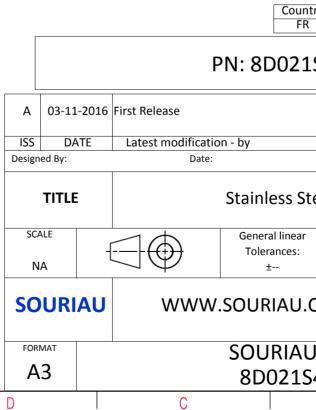

	Φ		A		
	Re				4
S EXA	AMPLE				3
s which er of t indation untry R	non-conformit ch does not co che Parties or b on, technical no Jurisd	mply with by a third part			2
		CUSTOME	RDRAWING	MOD N°	
Steel Receptacle 8D series					
ar			PROJECT 59		1
J.CC	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 8SN-C			SHEET 1/2	
	B		Α		J

	т	۵	н т	m	D		0	
		Contact Layout						Panel Cut
4	-×	48				SG	REAR MOUNTING	YPE 0)
	Ctc A	4#8 Power 21-48 X Y 4.57 4.57						ØT
ى	B C D	4.57 -4.57 -4.57 -4.57 -4.57 4.57						Dim ØA ØAA R1 ØT
	\vdash						the Specifications i	of the Products
2							P	Cour FI N: 8D021
					A ISS Design	DATE	5 First Release Latest modification Date:	
					SCA			Stainless S General linear
<u> </u>					N SO		www.	Tolerances: ±

F

Е

G

Н

FORMAT

A3

D

С

