


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED PER RTS 645225	03/MAY/12	ECC	JDM

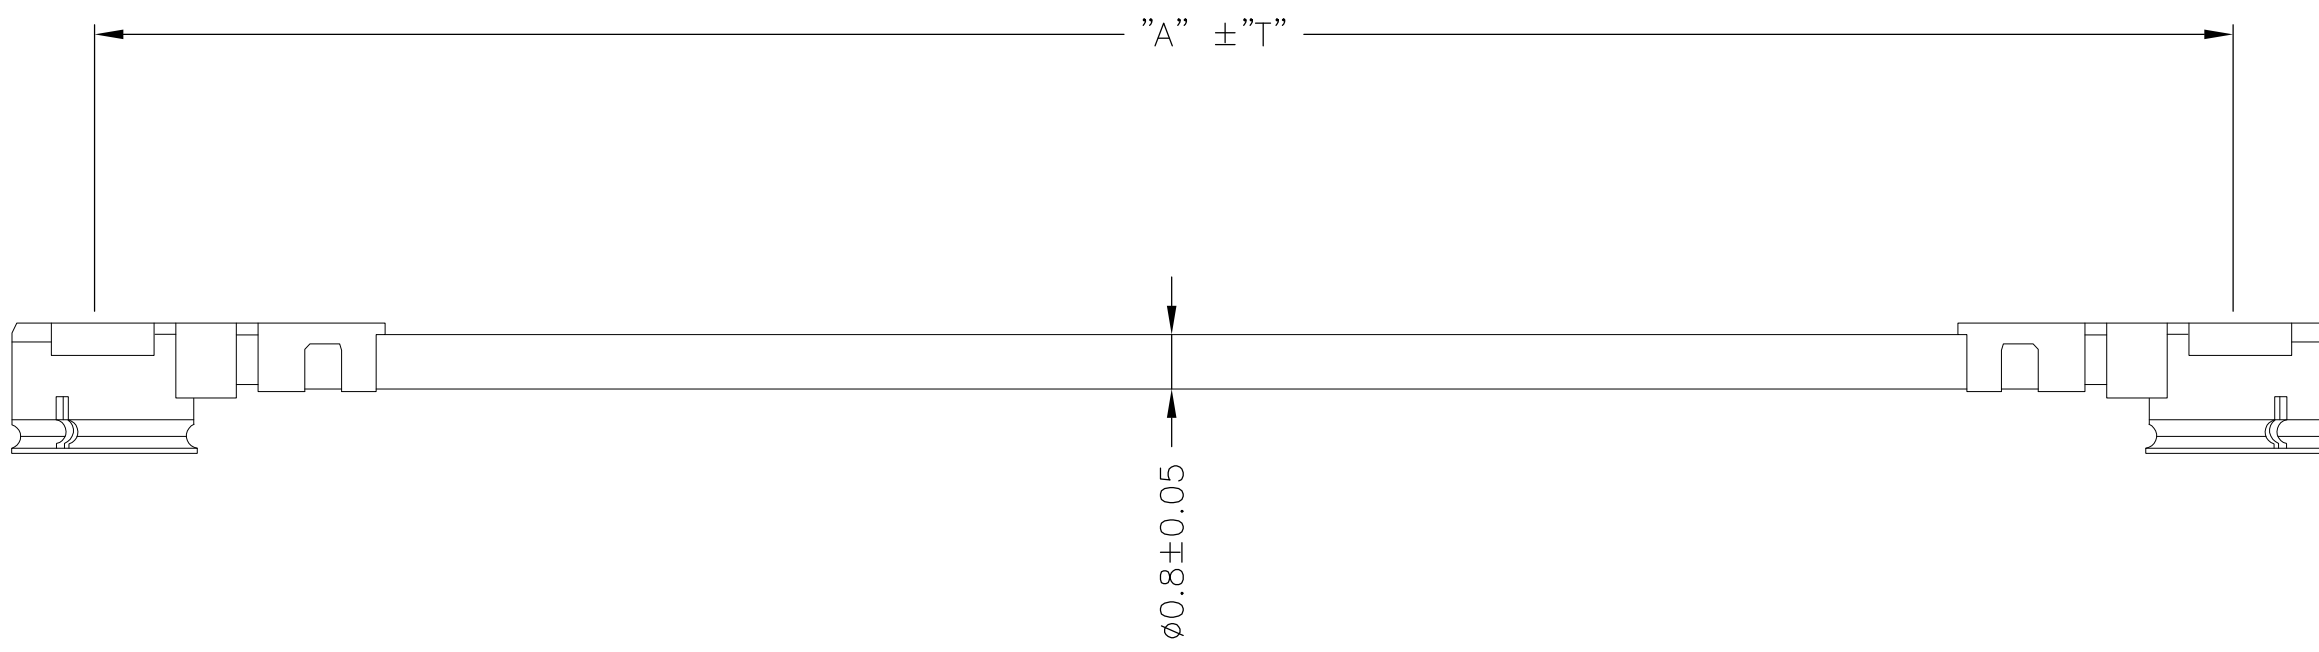

1. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD TEC-138-702.
2. CABLE ASSEMBLY TO BE 100% ELECTRICALLY TESTED FOR OPENS, SHORTS AND CONTINUITY.

HI-HOT: 200 VDC FOR 100ms  
 INSULATION RESISTANCE: 500M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHz  
 VSWR: 1.5:1 MAX

2.0	26.0	2015698-8
2.0	140.0	2015698-5
2.0	50.0	2015698-4
3.0	200.0	2015698-3
2.0	100.0	2015698-2
2.0	39.0	2015698-1
"T" TOLERANCE	"A" LENGTH	TE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	18/DEC/07	 <b>TE Connectivity</b>											
DIMENSIONS: mm		CHK	18/DEC/07												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	18/DEC/07												
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC	± -				1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES
0 PLC	± -														
1 PLC	± -														
2 PLC	± -														
3 PLC	± -														
4 PLC	± -														
ANGLES	± -														
MATERIAL		FINISH		CABLE ASSY, UMCC R/A TO UMCC R/A, TYPE II, 0.80mm CABLE											
-		-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO								
-		-		A3	00779	C-2015698	-								
CUSTOMER DRAWING				SCALE	SHEET	REV									
				N.T.S.	1 OF 1	B									