




**870 MHz Ceramic Bandpass Filter**

**P/N: AM870B1049**

Center Frequency (Fo):	870 MHz
Bandwidth(BW):	Fo +/- 26 MHz
Insertion Loss (Fo):	3.0 dB max
VSWR in BW:	1.5:1
Ripple in BW:	0.5 dB max
Attenuation:	50 dB min at 800 MHz 45 dB min at 940 MHz
In/Out Impedance:	50 ohm
Operating Temperature:	-30 to +80°C
Power Input:	10 dBm max
This product is RoHs Compliant	

**DIMENSION:**

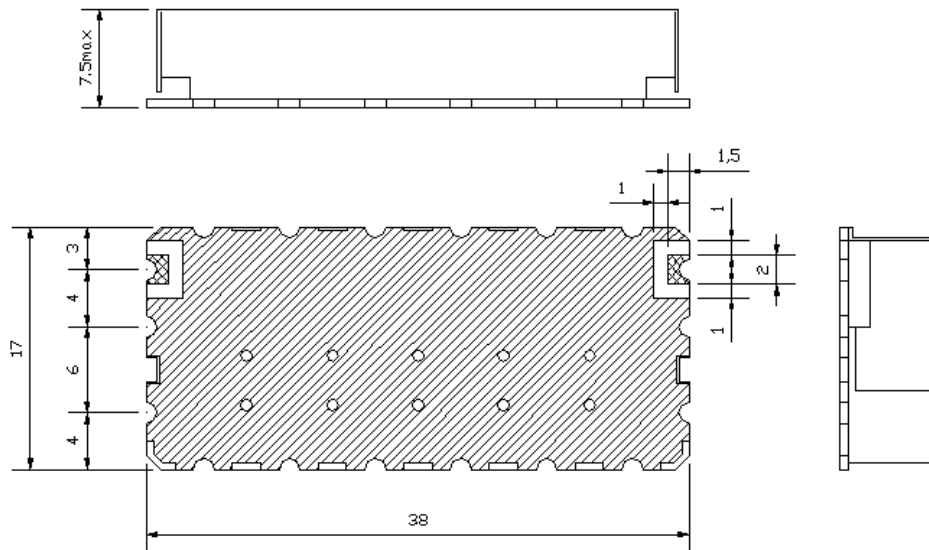

Unit:mm  
Tolerance:±0.3