

## 799 SERIES 4-WAY CF8 FUSE HOLDER

58 Vdc • 500 A • 4-Position • Internally Bussed




### Description

The 799 series is a compact high current multi-circuit fuse holder. It is ideal for primary branch fusing in locations close to the battery where space is at a premium. The holder's 4 positions are electrically connected with an internal bus bar. Applications include distributing fused or non-fused power circuits, as well as being used to distribute ground returns. It is designed for both rugged commercial vehicle, and light industrial applications.

### Features and Benefits

- Accepts up to 300 A CF8 fuses with a total maximum current of 500 A
- Isolated studs allow for use of standard hardware as opposed to other products that require a plasticized nut to isolate fuse from bolt
- Input line can be brought in direct or through a master fuse for additional protection
- Conductive bus bar molded directly into unit for added rigidity and installation ease

### Dimensions in millimeters

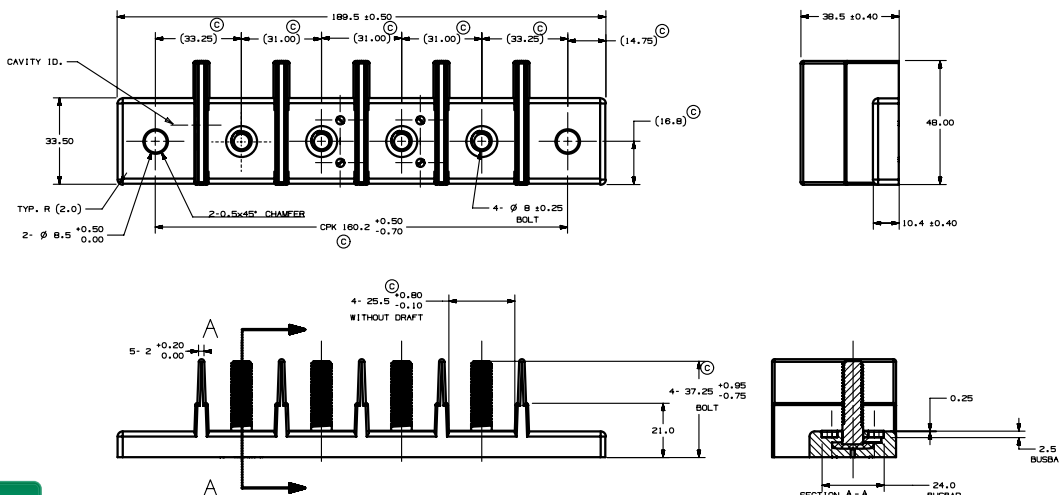

### Specifications Overview

<b>Max Voltage Rating:</b>	58 Vdc
<b>Max Current Rating:</b>	500 A
<b>Stud Size:</b>	M8
<b>Stud Torque:</b>	25 Nm
<b>Mounting Hardware:</b>	M8 bolts and washers*
<b>Mounting Torque:</b>	25 Nm max
<b>Temperature Range:</b>	-40 to +125 °C
<b>Dimensions:</b>	189.5 x 48.0 x 38.5 mm

\*Sold Separately

### Recommended Fuses

- Littelfuse series: CF8; Competitor equivalent fuses



CF8 Fuse  
Shown for Reference  
Sold Separately

### Web Resources

Download 2D outline and technical resources at:  
[littelfuse.com/](http://littelfuse.com/)

### Ordering Information

PART NUMBER	PACK QUANTITY	DESCRIPTION
0799C001ZXS	48	Complete Assembly



Visit [Littelfuse.com](http://Littelfuse.com) for the most up-to-date product information. Littelfuse reserves the right to make product changes, without notice. Material in this document is as accurate as known at the time of publication.