


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 ALL RIGHTS RESERVED.

| REVISIONS | | | | |
|-----------|-----|----------------------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | APVD |
| E1 | | ADDED -4 PART. | 16NOV2020 | SJ JH |
| E2 | | REVISED | 09APR2021 | SJ CY |
| E3 | | Updated cable length of -4 | 19APR2021 | SJ CY |
| E4 | | REVISED | 14JUN2022 | SJ CY |

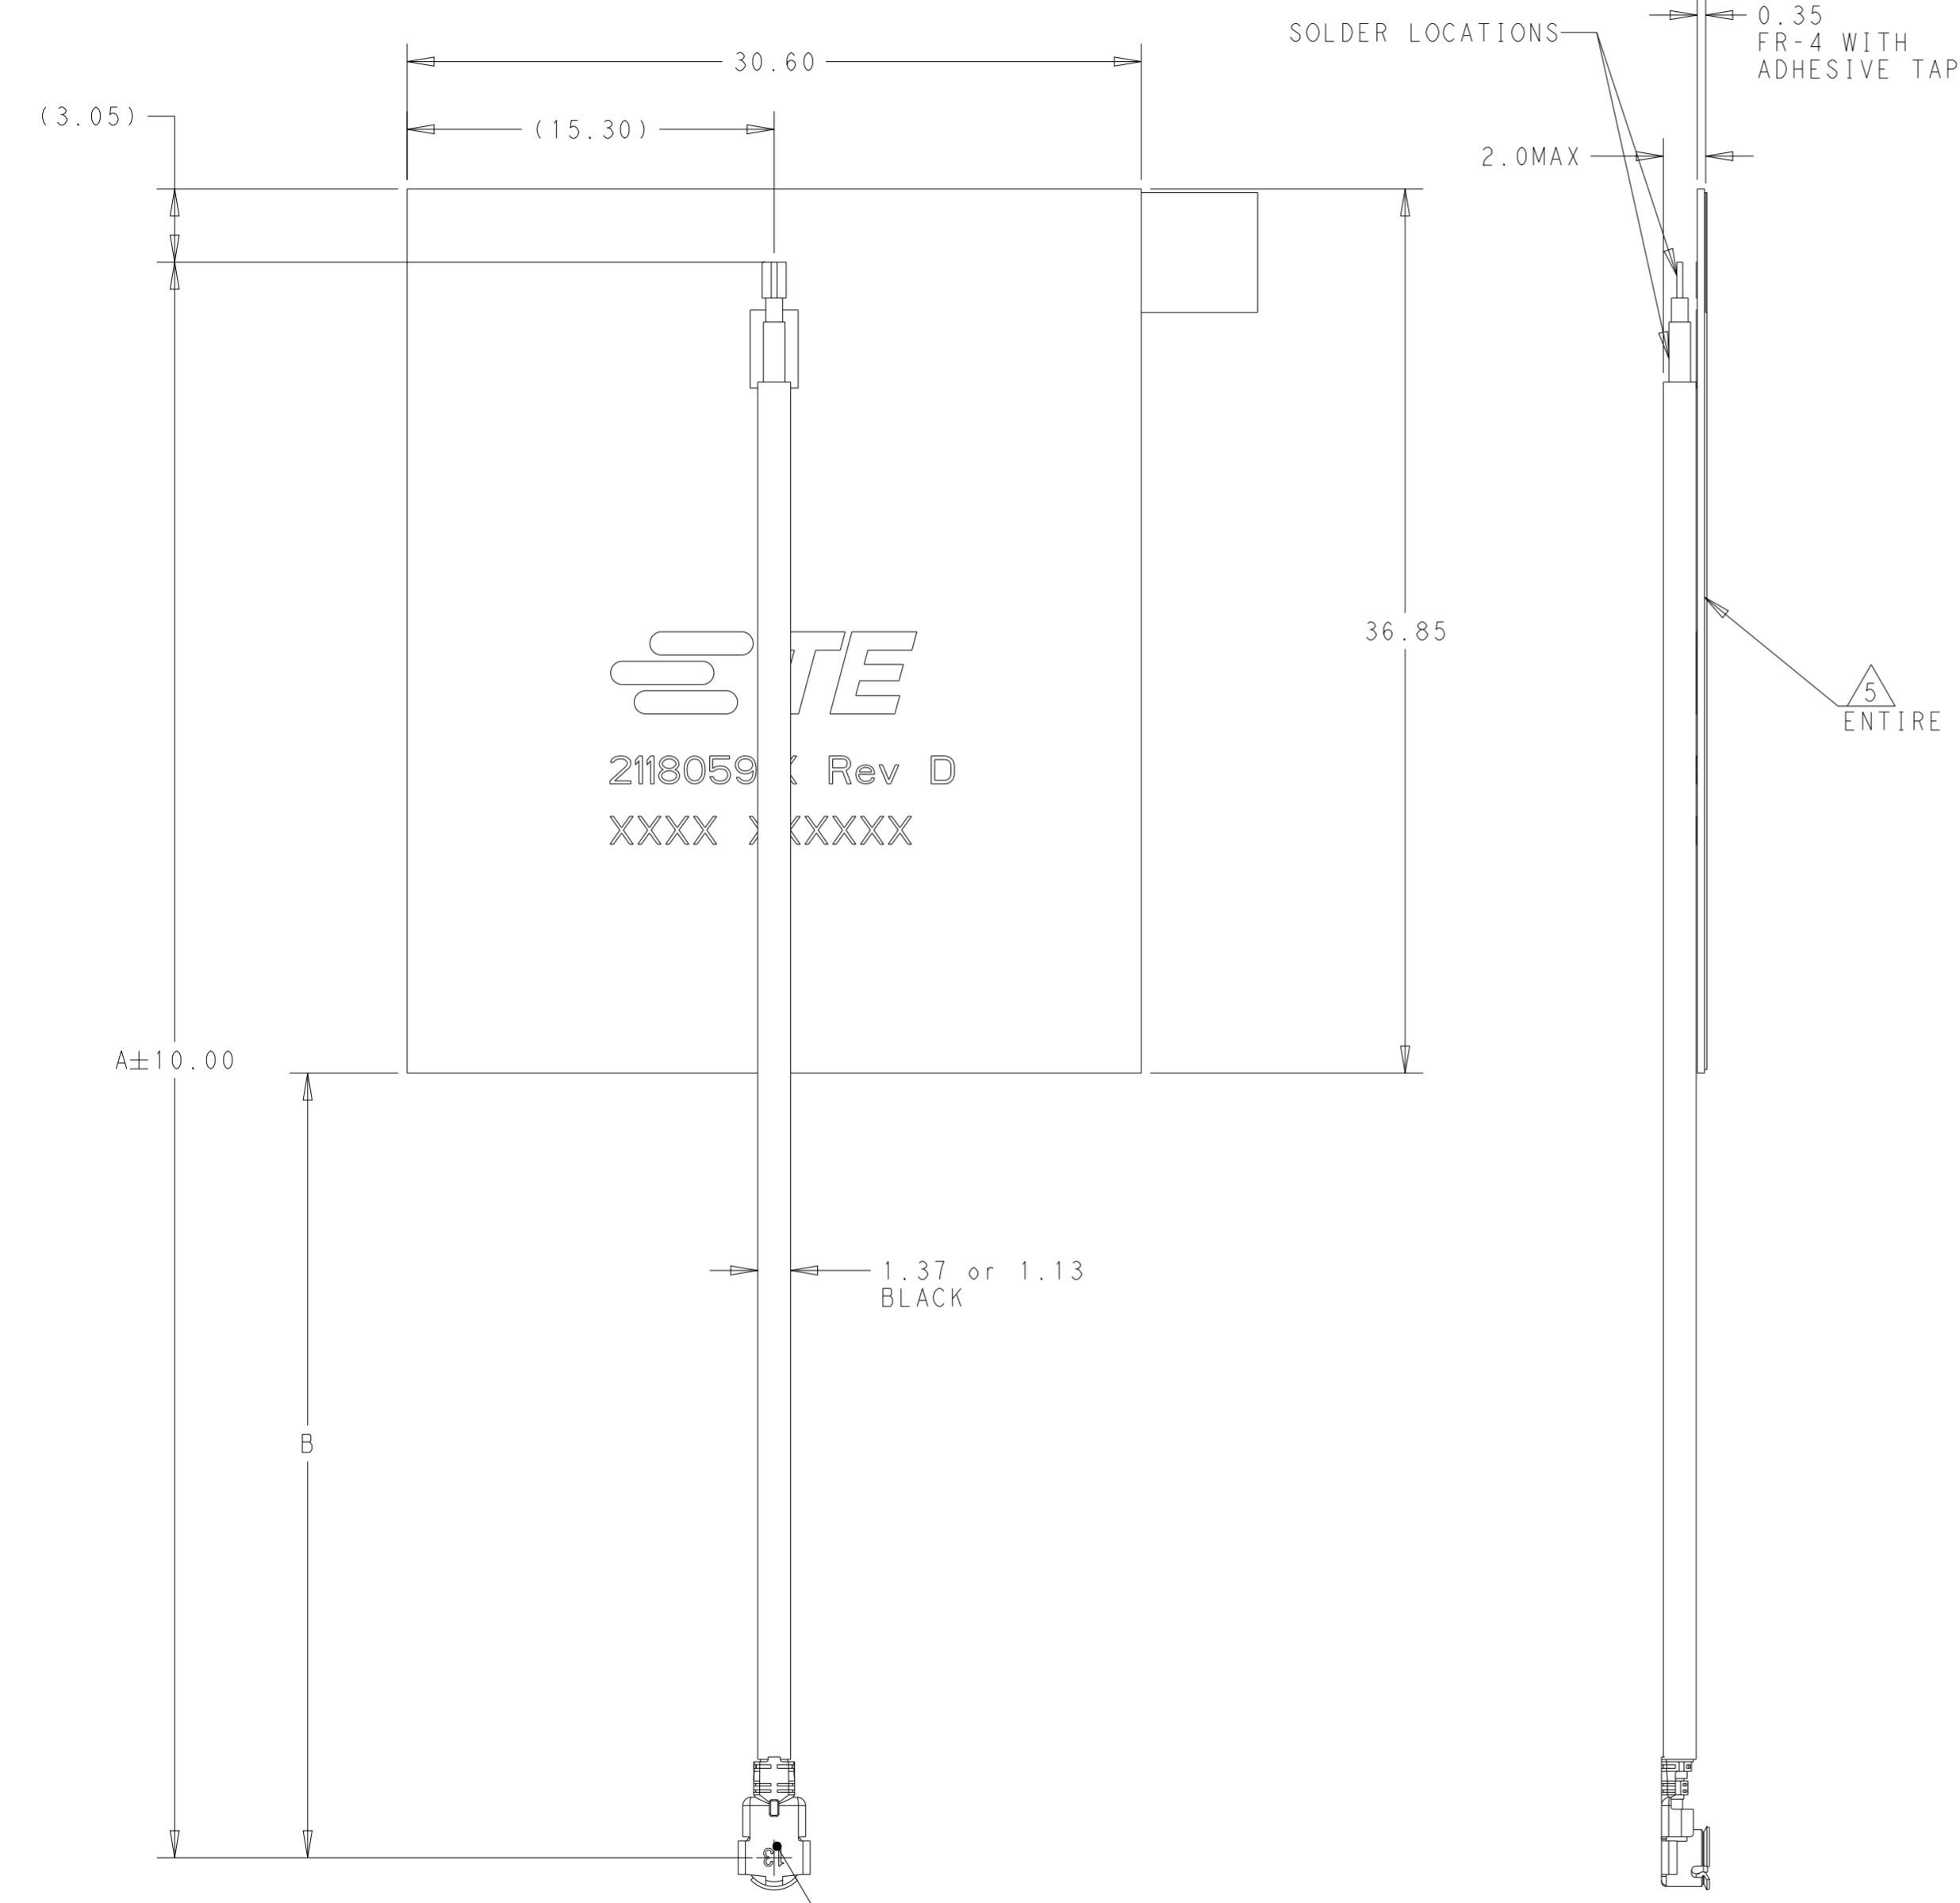

- NOTES: UNLESS OTHERWISE SPECIFIED.
1. SILKSCREEN TE LOGO, TE PN, REVISION LETTER ON TOP LAYER. FOLLOWED BY 4 DIGIT DATE CODE.
 2. MATERIAL: FR4, COPPER THICKNESS 1 OZ, CABLE- MHF or MHF4 WITH TE APPROVED EQUIVALENT. TOTAL THICKNESS 0.304 WITH OUT ADHESIVE.
 3. FINISH: ENIG-ELECTROLESS NICKEL IMMERSION GOLD ON EXPOSED SOLDER AREAS PRIOR TO SOLDERING.
 4. PRODUCT AND PROCESSING MEETS REQUIREMENTS OF TE CONNECTIVITY ENVIROMENTAL SPECIFICATION TEC-138-702.
 5. ADHESIVE; REMOVE PAPER BACKING OF PRESSURE SENSITIVE ADHESIVE TO APPLY.
 6. REFERENCE TE DATASHEET DS2118059-1 FOR ANTENNA SPECIFICS.

STE
 2118059 Rev D
 XXXX XXXXX

5 ENTIRE BACK SURFACE

CONNECTOR MATING FACE DOWN IN THIS VIEW "C"

| | | | | |
|-------------------------|----------|--------|--------|-----------|
| MHF 4L or TE EQUIVALENT | 1.13 | 400.00 | 433.80 | 2118059-4 |
| MHF | 1.37 | 116.20 | 150.00 | 2118059-3 |
| MHF | 1.37 | 316.20 | 350.00 | 2118059-1 |
| "C" CONNECTOR TYPE | CABLE OD | B | A | PN |

| | | | | | |
|--|---------|---------------------------|----------------------------|---------|---|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN J. SCHOLZ 22 JUL 2016 | STE TE Connectivity | | |
| DIMENSIONS: mm | | CHK J. SCHOLZ 22 JUL 2016 | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD J. MOORE 22 JUL 2016 | | | |
| 0 PLC ± | 1 PLC ± | 2 PLC ±0.2 | 3 PLC ± | 4 PLC ± | NAME WMAX SINGLE BAND, U.FL CABLE 2300 Mhz-3800<Mhz |
| MATERIAL - | | FINISH - | APPLICATION SPEC - | SIZE A2 | CAGE CODE - |
| CUSTOMER DRAWING | | SCALE 4:1 | SHEET 1 OF 1 | REV E4 | RESTRICTED TO - |