



Miniature circuit breaker 400 V 10kA, 4-pole, D, 10A, D=70 mm

| Model   |                                 |
|---|---------------------------------|
| product brand name  | SENTRON                         |
| product designation   | Miniature circuit breaker       |
| General technical data  |                                 |
| number of poles   | 4                               |
| design of pole  | 4P                              |
| tripping characteristic class   | D                               |
| mechanical service life (switching cycles) / typical  | 10 000                          |
| overvoltage category  | III                             |
| degree of pollution   | 3                               |
| Voltage   |                                 |
| type of voltage / of the operating voltage  | AC                              |
| insulation voltage (U <sub>i</sub> )  |                                 |
| • with single-phase operation / at AC / rated value   | 440 V                           |
| • with multi-phase operation / at AC / rated value  | 440 V                           |
| supply voltage / with single-phase operation / at AC / rated value                          | 230 V                           |
| Supply voltage  |                                 |
| supply voltage  |                                 |
| • at AC / rated value   | 400 V                           |
| value range / of the supply voltage frequency   | 50/60 Hz                        |
| operating voltage / at DC / rated value / maximum   | 72 V                            |
| Protection class  |                                 |
| protection class IP   | IP20, with connected conductors |
| Switching capacity  |                                 |
| switching capacity current  |                                 |
| • at DC / according to IEC 60947-2 / rated value  | 15 kA                           |
| • according to EN 60898 / rated value   | 10 kA                           |
| • according to IEC 60947-2 / rated value  | 20 kA                           |
| Dissipation   |                                 |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole | 0.9 W                           |
| Current   |                                 |
| operational current   |                                 |
| • at 35 °C / rated value  | 10 A                            |
| • at 40 °C / rated value  | 9.39 A                          |
| • at 45 °C / rated value  | 9.07 A                          |
| • at 50 °C / rated value  | 8.74 A                          |
| • at 55 °C / rated value  | 8.4 A                           |

|  |  |
|--|--|
| <ul style="list-style-type: none"> <li>at 60 °C / rated value</li> <li>at AC / rated value</li> </ul>  | 8.04 A<br>10 A                                       |
| suitability for operation  | Mechanical engineering / industry                    |
| <b>Product details</b>   |  |
| product component  |  |
| <ul style="list-style-type: none"> <li>combined terminal top</li> <li>combined terminal bottom</li> <li>neutral conductor switching</li> </ul>                             | Yes<br>Yes<br>No                                     |
| product feature  |  |
| <ul style="list-style-type: none"> <li>properties for main switches in accordance with EN 60204-1</li> <li>halogen-free</li> <li>sealable</li> <li>silicon-free</li> </ul> | Yes<br>Yes<br>Yes<br>Yes                             |
| product extension / installable / supplementary devices  | Yes  |
| <b>Short circuit</b>   |  |
| breaking capacity short-circuit current (I <sub>cn</sub> )   |  |
| <ul style="list-style-type: none"> <li>at AC / according to UL 1077 and CSA C22.2 No.235</li> </ul>  | 5 kA   |
| <b>Connections</b>   |  |
| connectable conductor cross-section / solid  |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | 0.75 mm <sup>2</sup><br>35 mm <sup>2</sup>           |
| connectable conductor cross-section / stranded   |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | 0.75 mm <sup>2</sup><br>35 mm <sup>2</sup>           |
| connectable conductor cross-section / finely stranded / with core end processing   |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | 0.75 mm <sup>2</sup><br>25 mm <sup>2</sup>           |
| AWG number / as coded connectable conductor cross section  |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | 18<br>4  |
| tightening torque [lbf-in] / with screw-type terminals   |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | 22 lbf-in<br>31 lbf-in                               |
| tightening torque / with screw-type terminals  |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | 2.5 N·m<br>3.5 N·m                                   |
| position / of power supply cord  | Any  |
| <b>Mechanical Design</b>   |  |
| height   | 90 mm  |
| width  | 72 mm  |
| depth  | 76 mm  |
| installation depth   | 70 mm  |
| number of modular width units  | 4  |
| fastening method   | Quick assembly system                                |
| mounting position  | any  |
| net weight   | 601 g  |
| <b>Environmental conditions</b>  |  |
| influence of the surrounding temperature   | max. 95% to 55°C, max. 55% to 70°C, max. 35% to 75°C |
| standard   | IEC / EN 60898-1, IEC / EN 60947-2 / UL1077          |
| vibration resistance / according to IEC 60068-2-6  | ±1mm at 5 to 25Hz; 50m/s <sup>2</sup> at 25 to 150Hz |
| ambient temperature / during operation   |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | -40 °C<br>70 °C                                      |
| ambient temperature / during storage   |  |
| <ul style="list-style-type: none"> <li>minimum</li> <li>maximum</li> </ul>   | -40 °C<br>75 °C                                      |

|   |   |
|---|---|
| number of test cycles / for environmental testing / according to IEC 60068-2-30 | 6 |
|---|---|

### Certificates

|   |        |
|---|--------|
| reference code  |        |
| <ul style="list-style-type: none"> <li>• according to EN 61346-2</li> <li>• according to IEC 81346-2</li> </ul> | F<br>F |

### General Product Approval

[Confirmation](#)



[Miscellaneous](#)

| General Product Approval | EMC | Declaration of Conformity | Test Certificates |
|--------------------------|-----|---------------------------|-------------------|
|--------------------------|-----|---------------------------|-------------------|



[Miscellaneous](#)



EG-Konf.

[Special Test Certificate](#)

| Test Certificates | Marine / Shipping |
|-------------------|-------------------|
|-------------------|-------------------|

[Miscellaneous](#)



LRS



RINA



DNV-GL

| other | Railway |
|-------|---------|
|-------|---------|

[Miscellaneous](#)

[Environmental Conformations](#)

[Vibration and Shock](#)

[Confirmation](#)

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SY4410-8>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SY4410-8>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SY4410-8](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4410-8)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

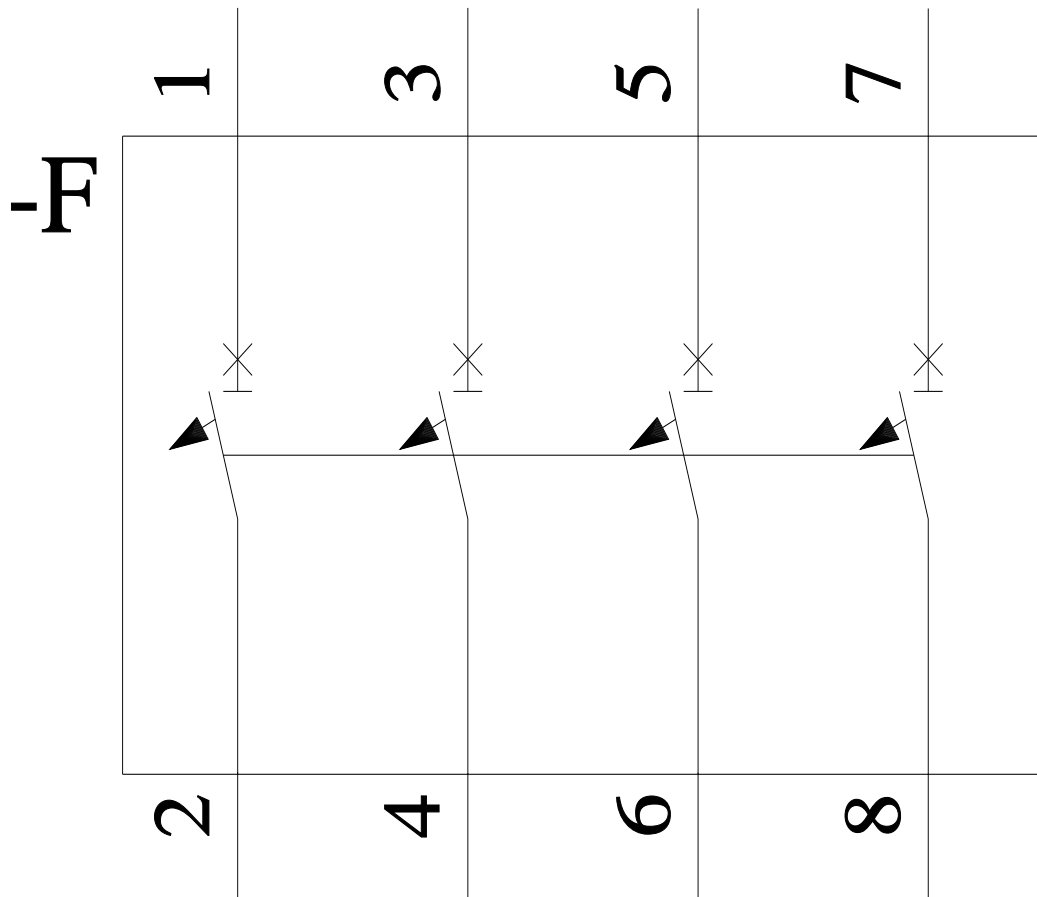

**CB**

