



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	(1)

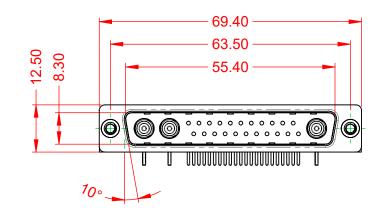




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDAN
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONT 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.


DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

NCE) TACT

-55°C ~ 125°C

1000V AC rms



				SW REFERENCE NO.: 629 COMBO ASSEMBLY				
			DRAWN: C.B		DATE: JAN. 01/2019			
			CHECKED:		DATE:			
EDAC	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	SCALE: (IN C.A.D. 1	l:1)	SHEET 1 OF	2		
			DRAWING NUMBER: 629-25W3640-5TC		3640-5TC	ISSUE		
	YOUR CONNECTION TO	QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER:	629-25W	3640-5TC	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

