

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 COPPER ALLOY, GOLD FLASH PLATED

20.33

POWER/CO-AX CONTACT RATING: 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC


WITHSTANDING VOLTAGE:

**OPERATING TEMPERATURE:** 

.XX

±0.13 .XXX ±0.05

1000V AC rms

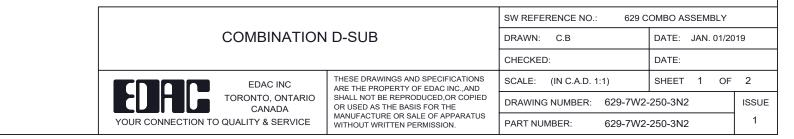



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

 $\bigcirc$ 

STEEL, NICKEL PLATED -55°C ~ 125°C

