


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.





S

POLYESTER, UL94V-0 ATED 30µ GOLD PLATED

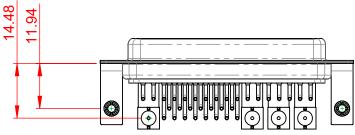

MATERIAL:	
HOUSING:	THERMOPLASTIC I
SHELL:	STEEL, NICKEL PL/
CONTACT:	COPPER ALLOY, 30
	-55°C ~ 125°C
OPERATING TEMPERATURE:	-55 C ~ 125 C
POWER/CO-AX CONTACT RATING:	50Ω (IMPEDANCE)
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

10.70


5.80

11.94


2.54

WITHSTANDING VOLTAGE:

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 630-36W4640-5N3		ISSUE
Y			PART NUMBER: 630-36W4	1640-5N3	1

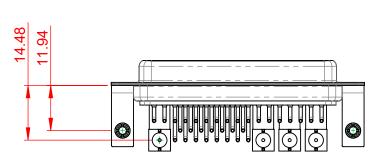

THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

Ē

COMPLIANT

