

|        | т   |   | G        | П      |               | п            | 1                    |                        | D                      |      | C  |                    |                             |
|--------|---|---|----------|--------|---------------|--------------|----------------------|------------------------|------------------------|------|--|--------------------|-----------------------------|
| 4      |   |   | V Thread | ØS     |               |              |                      |                        |                        |      |  |                    |                             |
| ယ      |   |   |          | Keying | Shown as exar | nple         |                      |                        |                        |      | LA   | YOUT SHO           | WN AS EXA                   |
|        | CHARACTERISTICS   |   |          |        |               | Connector d  |                      | ]                      |                        |      |  |                    |                             |
| $\sim$ | Standard : Based on   |   | s III    |        |               | ØS           | Nominal<br>35.7 Max  | -                      |                        |      |  |                    |                             |
|        | -Shell Material<br>-Shell Plating<br>-Insulator<br>-Contacts  | : Composite<br>: Olive drab Cadm<br>: Thermoplastic<br>: Copper Alloy<br>: Silicon Elastome |          |        |               | Z'<br>THREAD | 31.5 Max<br>M25x1-6g | ]                      |                        |      | SOURIAU shall<br>due to a use<br>the Specification<br>(profess | e of the Pro       | ducts which<br>either of th |
| N      | -Seals & Grommet<br>-Contact Plating<br>-Durability   |   |          |        |               |              | PN: 8D517JC          |                        |                        |      |  |                    |                             |
|        | -Delivered with Souri   | au contacts and Acce  | ssories  |        |               |              |                      |                        |                        |      |  | PN: 8L             | 121/10                      |
|        | -Temperature Range<br>-Salt Spray<br>-Mass  | <ul> <li>65°C to +175°C</li> <li>: 2000 hours</li> <li>: 25.9 g ± 10%</li> </ul>            |          |        |               |              |                      |                        | A 1<br>ISS<br>Designed | DATE | First Release<br>Latest modificati<br>Date:                    |                    |                             |
|        |   |   |          |        |               |              |                      |                        | т                      | TLE  | Composi  |                    |                             |
| -      | BASIC SERIES:       8D       5       -       17       J       06       P       B         SHELL TYPE : Plug with RFI Shielding |   |          |        |               |              |                      | SCALE<br>NA<br>SOURIAU |                        |      | Genera<br>Tolera<br>±·   | l linear<br>ances: |                             |
|        |   |   |          |        |               |              |                      |                        |                        | www  | .SOUR  | IAU.CO             |                             |
|        | PLATING : J =   | Olive drab Cadmiun  | 1        |        |               |              | CONTACT LAY          |                        | FORMAT                 |      | 1  |                    | RIAU D<br>517J06            |
| l      | Н   |   | G        | F      |               | E            |                      |                        | D                      |      | С  |                    |                             |
|        |   |   |          |        |               |              | V                    |                        |                        |      |  |                    |                             |

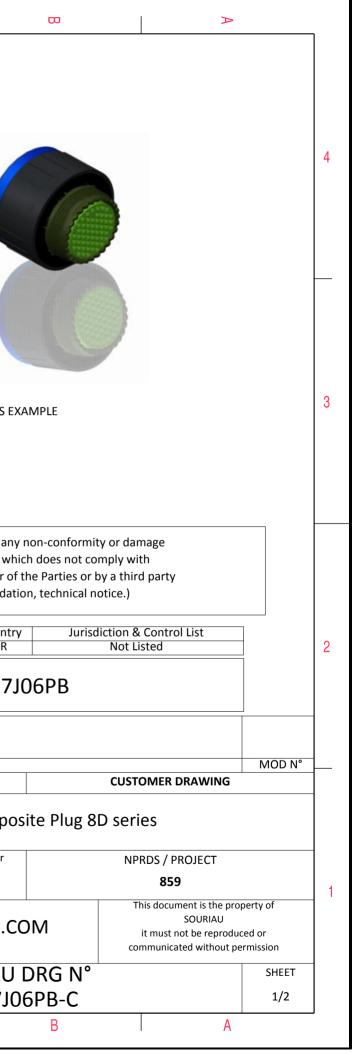

| r        | Ŧ   | ۵  | <del>ات</del> | m |  | 0  |               |
|----------|---|--|---------------|---|--|--|---------------|
|          |   | Contact Layout   |               |   |  |  |               |
| 4        | -x -  | $ \begin{array}{c} \bullet & \bullet \\ \bullet & \bullet $ |               |   |  |  |               |
|          | Conta   | Contacts<br>(Insert arrangement 17-6)<br>act Location  |               |   |  |  |               |
| ω        | A<br>B<br>C<br>D<br>E<br>F<br>Shell Arrangement Nun | (mm)         (mm)           +.121 (3.07)         +.209 (5.31)           +.241 (6.12)         +.000 (0.00)           +.000 (0.00)        241 (6.12)          241 (6.12)         +.000 (0.00)          121 (3.07)         +.209 (5.31)           +.000 (0.00)        000 (0.00)  | 1             |   |  |  |               |
|          | 17 -6   | ntacts contacts rating location<br>6 12 I All MS20053-6  |               |   |  | SOURIAU shall not be liab  | ble for an    |
| N        |   |  |               |   |  | due to a use of the Pro<br>the Specifications issued by<br>(professional recor | y either o    |
|          |   |  |               |   |  | D16 First Release  | D517          |
| _        |   |  |               |   | ISS DATE<br>Designed By:<br>TITLE<br>SCALE | Date:  | Compo         |
| <b>_</b> |   |  |               |   | NA   |  | rances:<br>±  |
|          | Н   | G  | F             | E | FORMAT<br>A3                               |  | JRIAU<br>517J |
|          | 11  | U U  | I I           |   |  |  | 1             |

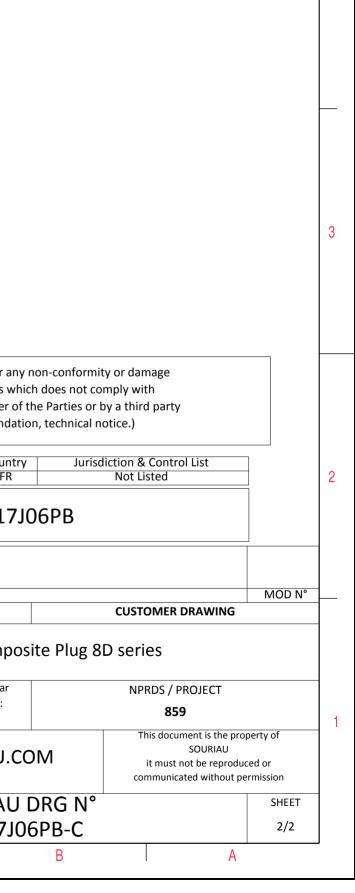

4