



**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# DC-2GHz/2-4GHz/4-8GHz/8-12GHz Quadruplexer


**Part Number: AE2G-3G-6G-10GQP8354**



## Electrical Specifications

	COM—CH1	COM—CH2	COM—CH3	COM—CH4
Passband Frequency:	DC~1900MHz	2100~3800MHz	4200~7600MHz	8400~11600MHz
Crossover Frequency:	DC~2000MHz	2000~4000MHz	4000~8000MHz	8000~12000MHz
Insertion Loss:	≤1.5dB	≤1.5dB	≤1.5dB	≤1.5dB
Crossover Insertion Loss:	≤5.5dB	≤5.5dB	≤5.5dB	≤5.5dB
Loss:				
VSWR:	≤2.0	≤2.0	≤2.0	≤2.0
Rejection:	≥50dB@2300-5000MHz	≥50dB@DC-1700MHz ≥50dB@4600-9000MHz	≥50dB@DC-3400MHz ≥50dB@9200-13000MHz	≥50dB@DC-6800MHz
Power:	15W			
Operating Temp.	-45°C~+70°C			
Storage Temp.	-55°C~+85°C			
Port Connectors:	SMA-Female (50Ω)			

## Outline Drawing:

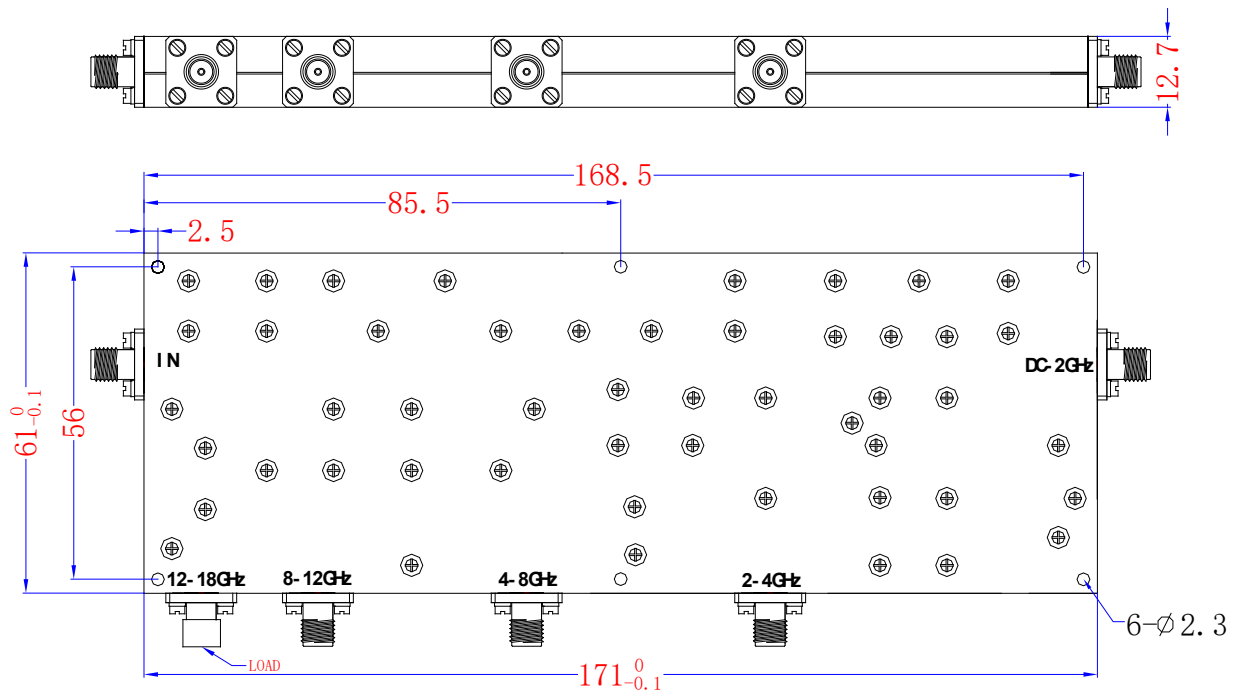

2 decimal places: +/-0.01 inches [+/- 0.3mm]

3 decimal places: +/- 0.005 inches [+/- 0.13mm]

Angles: +/- 1 Deg.

When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.

70 Outwater Lane Phone: (973) 772-4242  
Garfield, NJ 07026 Fax : (973) 321-3941

Email: [sales@anatechelectronics.com](mailto:sales@anatechelectronics.com)  
Web: [www.anatechelectronics.com](http://www.anatechelectronics.com)