



REV.	DESCRIPTION	DATE
A	NEW DRAWING	1/27/2006
B	Updated PCB layout	4/19/2006

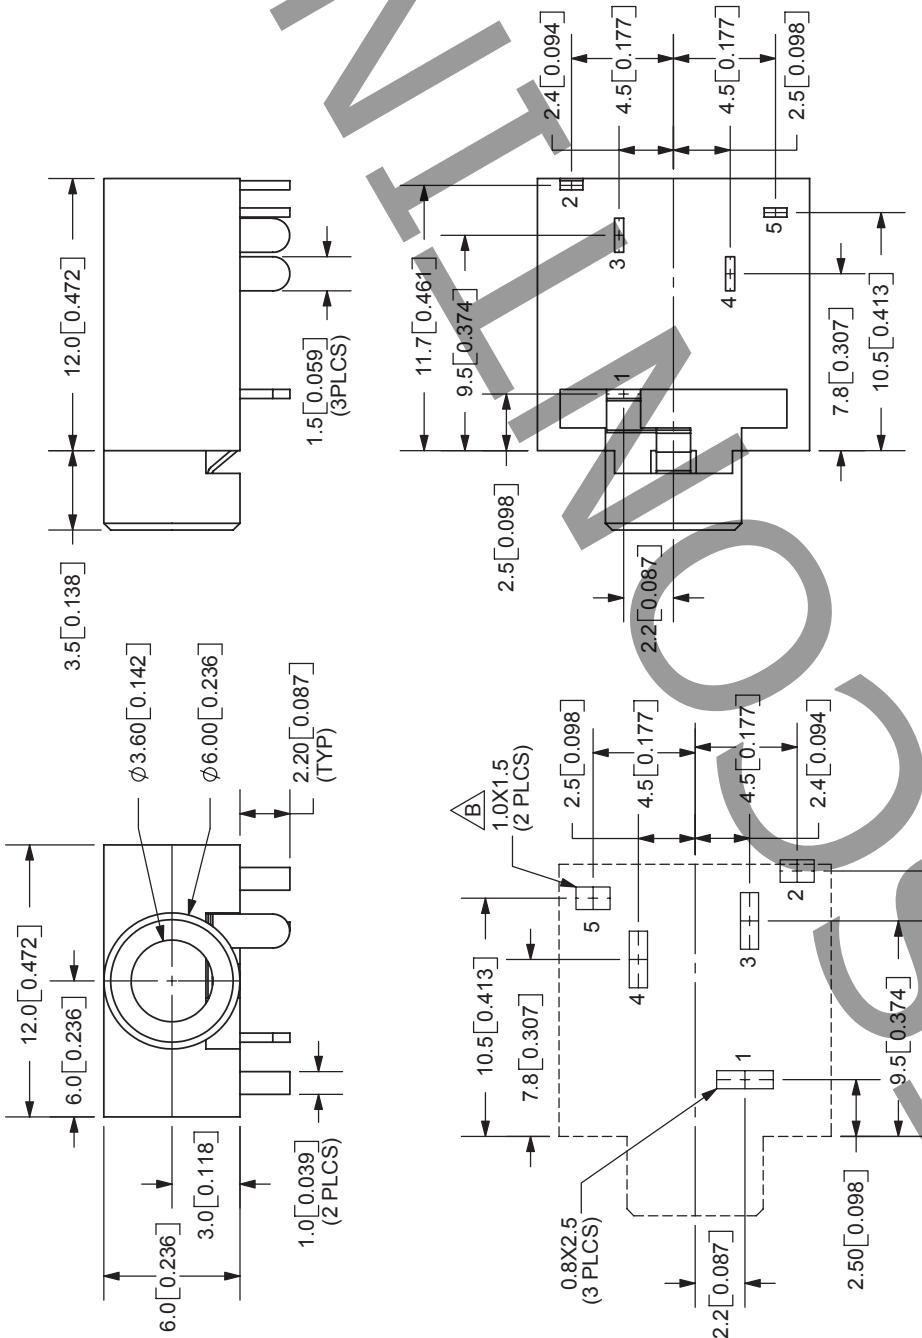

SPECIFICATIONS:
 RATING: 12V DC @ 1A
 CONTACT RESISTANCE: 10~20m OHMS MAX
 INSULATION RESISTANCE: 50M OHMS MIN: 500V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 LIFE: 10,000 CYCLES
 OPERATING TEMP: -20° ~ +60°C

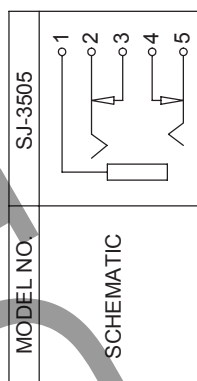

9615 SW Allen Blvd., Ste. 103
 Beaverton, OR 97005
 Phone: 503-643-4899
 800-275-4899
 Fax: 503-372-1266
 Website: www.cui.com

TOLERANCE:
 ±0.3mm UNLESS OTHERWISE
 SPECIFIED

TERMINAL	MATERIAL	PLATING
TERMINAL 1	Tin Bronze	Silver
TERMINAL 2	Copper Titanium	Silver
TERMINAL 3	Brass	Silver
TERMINAL 4	Brass	Silver
TERMINAL 5	Copper Titanium	Silver
HOUSING	PBT	

TITLE:	3.5mm AUDIO JACK - STEREO	REV:	B
PART NO:	SJ-3505	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
SCALE:			3:1