

| T | G | т | m | 0 |
|---|---|---|---|---|
| | | | | |



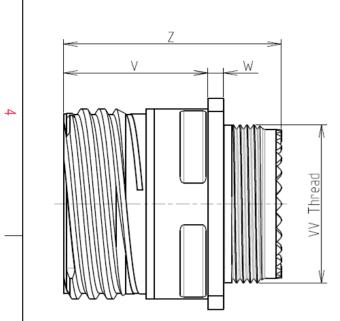

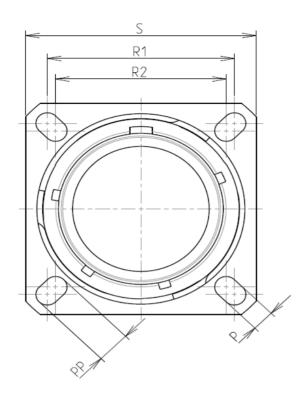

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel -Shell Plating : Passivated -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer : Gold over copper Alloy 0.8µm minimum -Contact Plating -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C

: 500 hours

8D 0

G

17

Κ

22

В

F

С

Connector dimension Dim Nominal 3.25±0.2 Р PP 4.93±0.2 26.97 R1 24.61 R2 S 33.3±0.3 V 20.83+0/-1.25 W 2.1/2.5 31.5 Max Ζ

Е

the Specifications issued by either (professional recomment Cou F VV THREAD M25x1-6g PN: 8D01 В 11-04-17 Drawing Update ISS DATE Latest modification - by Designed By: Date: TITLE Stainless S SCALE General linea Ð Tolerances: NA ±---ORIENTATION : C **SOURIAU** WWW.SOURIAU CONTACT TYPE : SOCKET(500 Matings) FORMAT SOURIA CONTACT LAYOUT : 17-22 A3 8D017

D

| 0 | | σ | | : | Þ | _ | |
|---|------------------------------------|------------------------|--|---|--------------|---|--|
| | | | | | | 4 | |
| LAY | YOUT SHOWN AS EX | AMPLE | | | | 3 | |
| SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed | | | | | | | |
| PN: 8D017K22BC | | | | | | | |
| Latest modification - by MOD N° Date: CUSTOMER DRAWING | | | | | | | |
| Stainless Steel Receptacle 8D series | | | | | | | |
| $] \bigoplus$ | General linear Tolerances: ± | NPRDS / PROJECT 859 | | | | | |
| WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | | | | |
| | SOURIAU 8D017K2 | | | | SHEET 1/2 | | |
| С | | В | | | A | L | |
| | | | | | | | |

| | <u>т</u> | ۵ | г П | m | | 0 | |
|---|-------------------------|---|-----|---|-------------------|--|--|
| 4 | | Contact Layout 22 | | | | P SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING | Panel Cut |
| ω | Ctc A B C D | 2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0 | | | | Max. thickness panel for receptacle: Typ ØA ØA ØA R1 ØT | |
| | - | | | | | SOURIAU shall not be lia due to a use of the P the Specifications issued b (professional reco | roducts v by either ommend |
| | | | | | | -04-17 Drawing Update DATE Latest modification - by Date: | Cour FF |
| | | | | | SCALE NA | E Stain | nless S eral linear erances: ± RIAU. |
| | Н | G | F | E | FORMAT A3 D | SOL | JRIAU JRIAU D017H |

