

T	G	н т (m	0



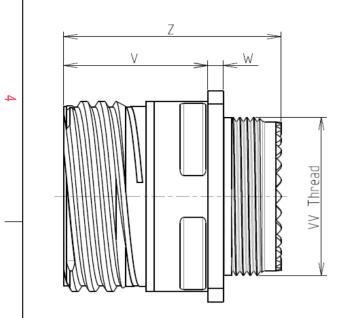

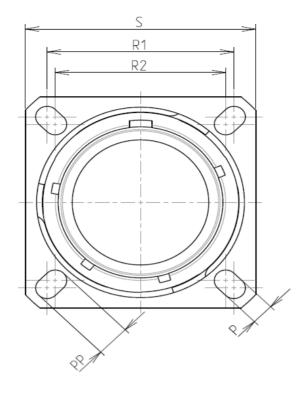

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Without Plating		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		

: 2000 hours

: 23.2 g ± 10%

8D 0

G

17

Х

06

Ρ


F

D

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
РР	4.93±0.2				
R1	26.97				
R2	24.61				
S	33.3±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M25x1-6g				

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

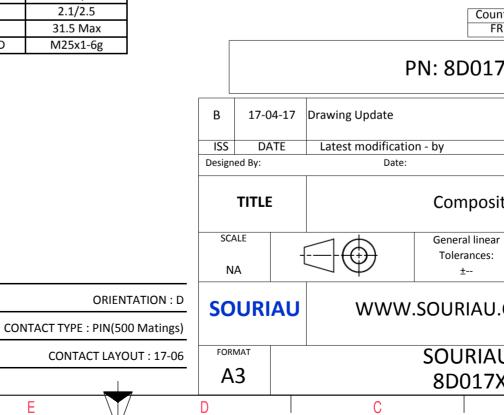

	Φ		A					
	AMPLE				3			
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)								
FR	Not Listed 7X06PD							
		CUST		MOD N°				
site	customer drawing e Receptacle 8D series							
ar :	NPRDS / PROJECT 859							
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	DRG N°			SHEET				
ΧU	6PD-C B		A	1/2	J			

