

	Т		۵	т	r	п		D		0		
4			V Thread	ØS								
ယ										LAYOL	JT SHOW	N AS EXA
				Keying Showi	n as example							
	CHARACTERISTICS				Connector		]					
-		MIL-DTL-38999 Series	111		Dim ØS	Nominal 25 Max						
	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet	: Composite : Olive drab Cadmiu : Thermoplastic : Copper Alloy : Silicon Elastomer	ım		Z' VV THREAD	31.5 Max M15x1-6g	]			SOURIAU shall not due to a use of t the Specifications iss (professiona	the Prode ued by e al recomr	ucts whicł ither of th
N	-Contact Plating -Durability	: Gold over copper : 500 Mating cycles		m						DN		FR 511J0
	-Delivered with Souria		sories								N. OD.	21110
	-Temperature Range -Salt Spray	<ul> <li>-65°C to +175°C</li> <li>2000 hours</li> </ul>						A 1	15-10-2016	First Release		
	-Mass	: 12.6 g ± 10%						ISS	DATE	Latest modification -	by	
								Designed	Ву:	Date:		
								т	ITLE		Сс	omposi
_	BASIC SERIES:	8D	5 - 11	J 05 P A				SCALE			General Toleran ±	ices:
_	SHELL TYPE : Plug with RFI Shielding         CONTACT TYPE : Standard Crimp Contact         SHELL SIZE : 11         CONTACT TYPE : PIN(500 Matings)											
									SOURIAU WWW.S		UUKI/	4U.CU
	PLATING : J =	Olive drab Cadmium				CONTACT LAYO	OUT : 11-05	FORMA		S	SOUR	
				•			2	A3				11J05
·	Н		G	F		E		D		С		
						V						

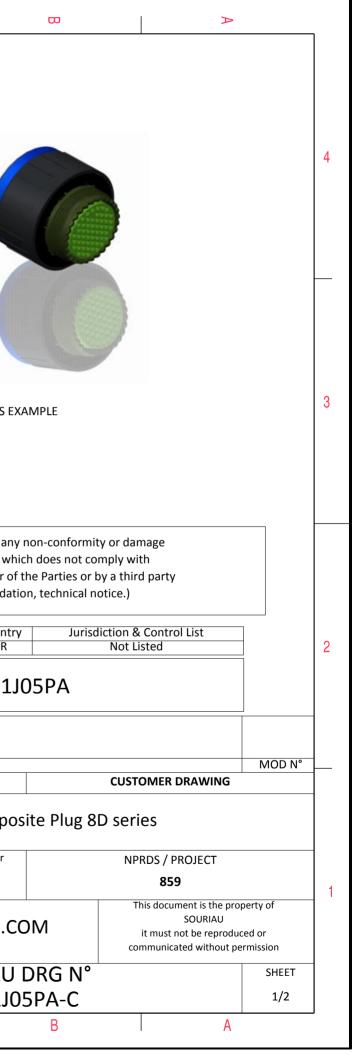

-	Ŧ	۵	וד	m		0
		Contact Layout				
4	- <u>×</u>	$ \begin{array}{c} \bullet \\ \bullet $				
	Conta positic ID A B C D E Shell Arrangement Numb size no. conta	+.065 (1.65)         +.056 (1.42)           +.113 (2.87)        065 (1.65)           +.000 (0.00)        130 (3.30)          113 (2.87)        065 (1.65)          065 (1.65)         +.056 (1.42)				
ω	11 -5 5					
	-					SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend
N						Coun FR PN: 8D511
					A 15-10-20 ISS DATE Designed By:	016 First Release
					TITLE	Comp General linear
<u> </u>					NA SOURIA	U WWW.SOURIAU.
				_	FORMAT A3	SOURIAU 8D511J
L	Н	G	F	E	D	С

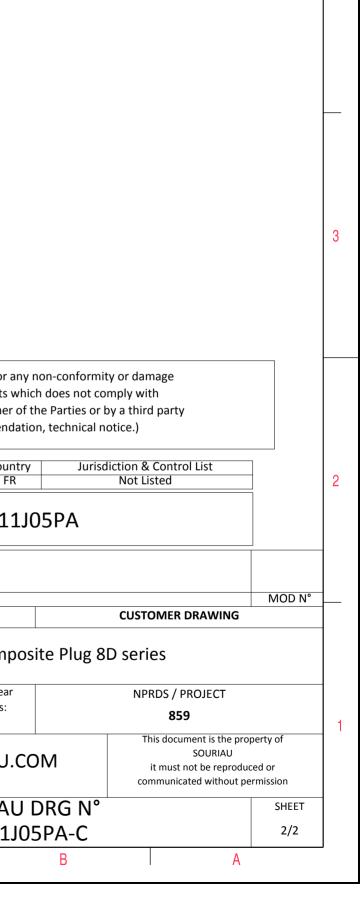

4