
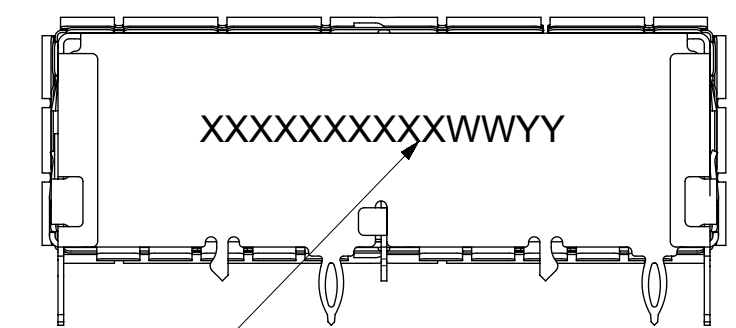
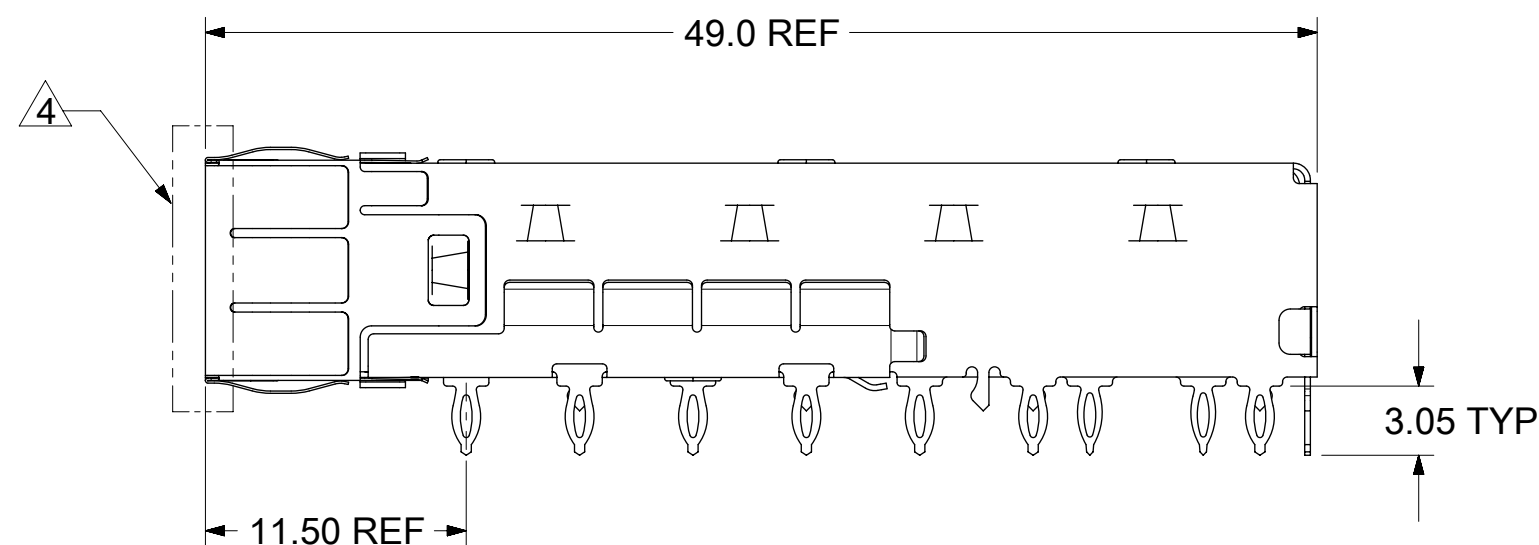
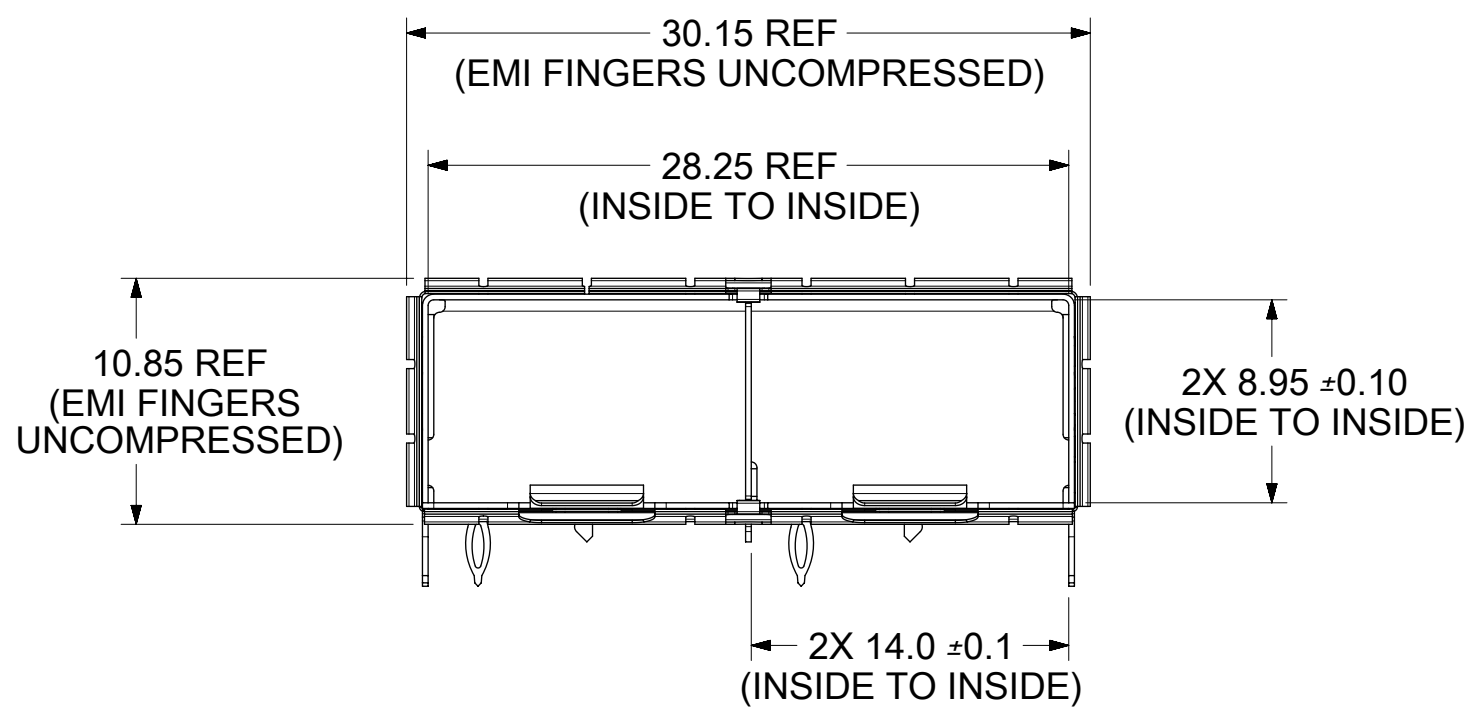
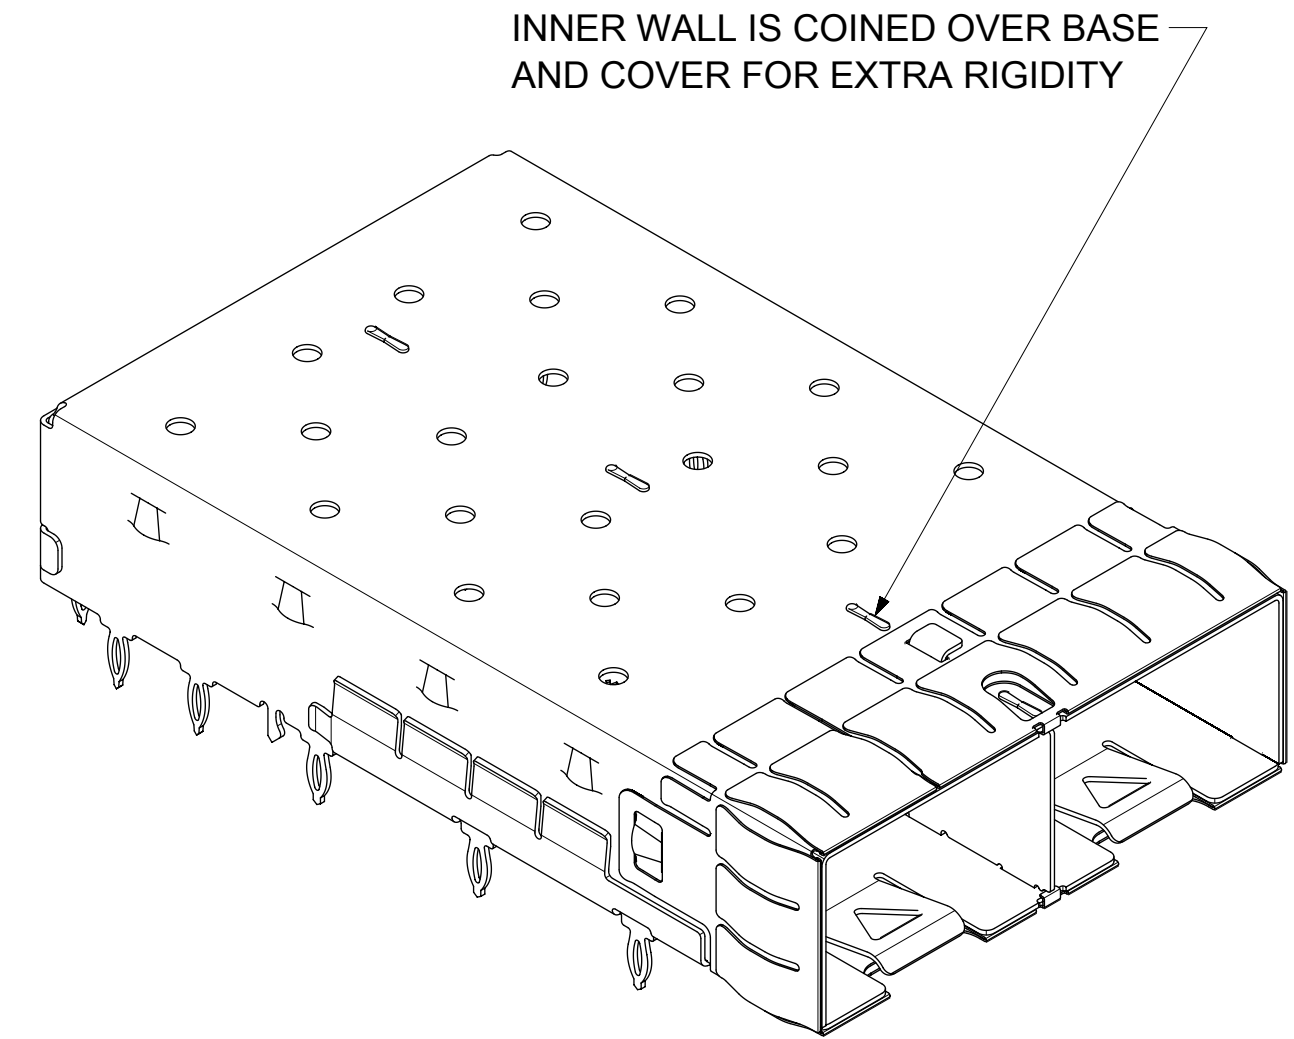
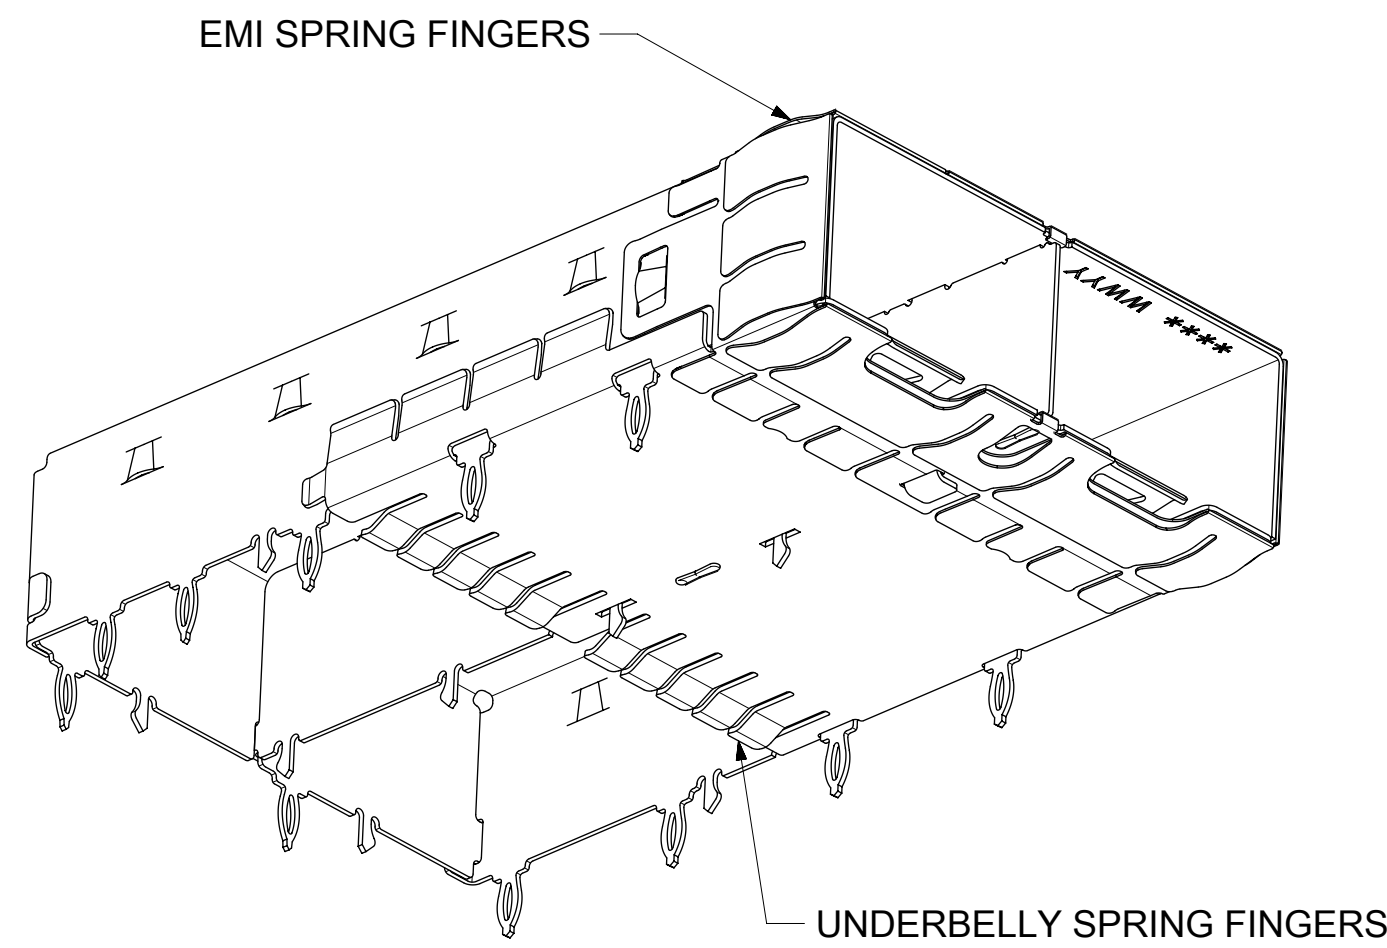


BASE CAGE DETAILS

747540220

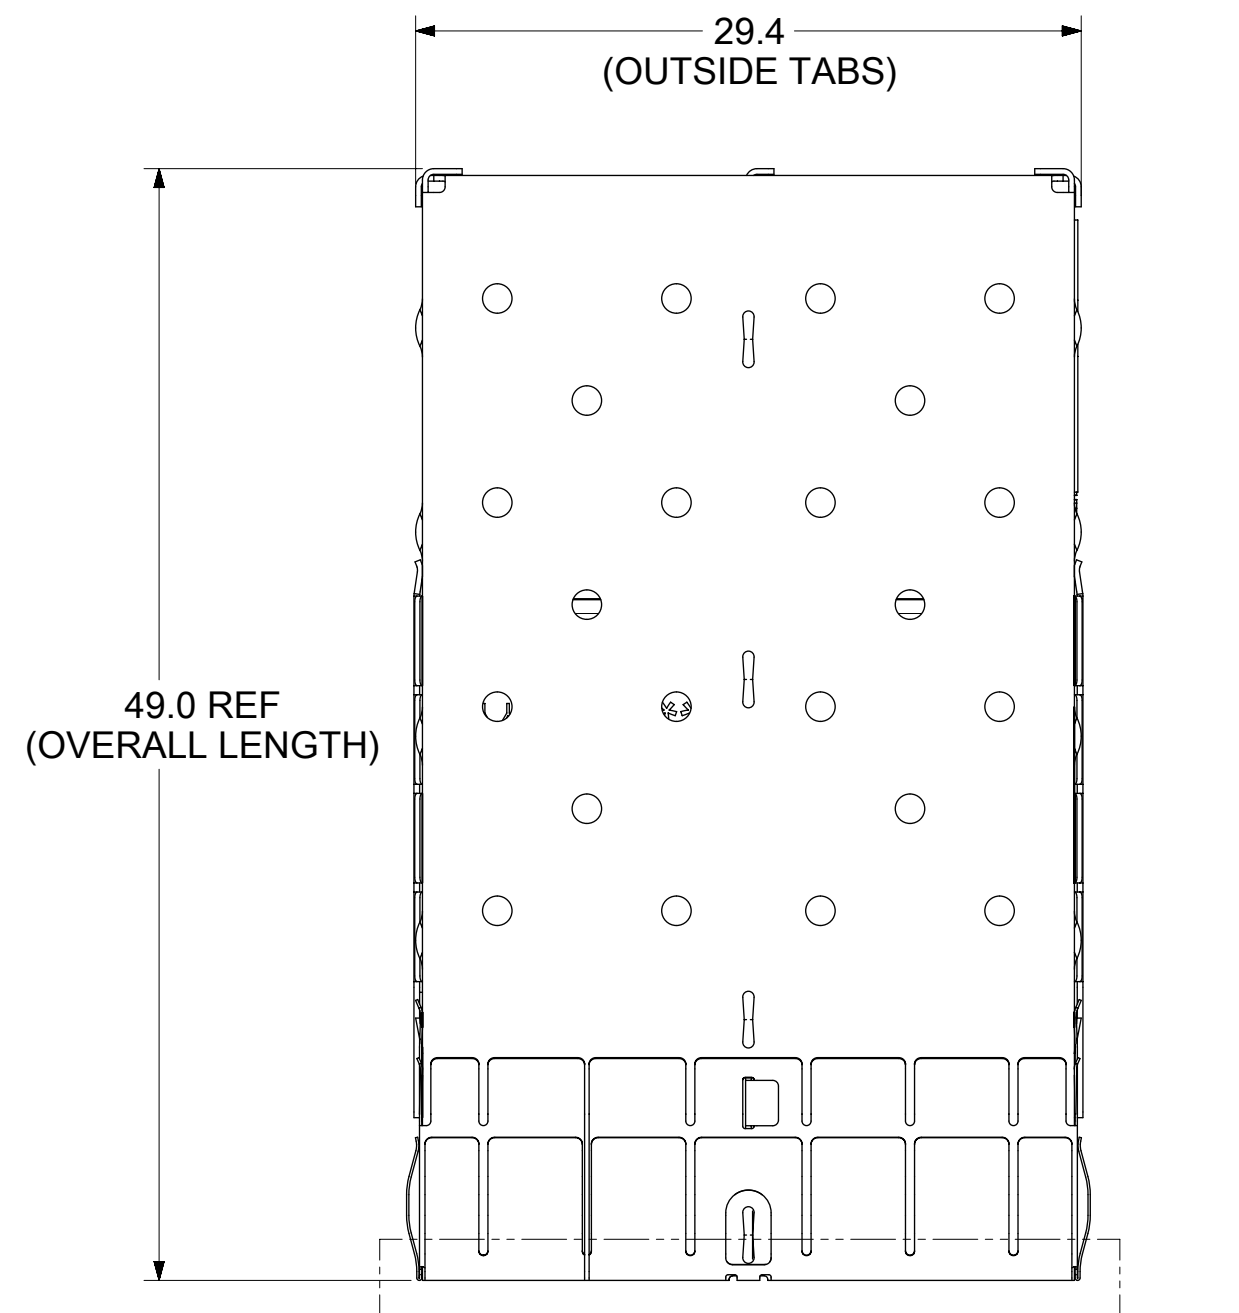

PN/DATE CODE TO BE PRINTED ON THE BACK OF COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN. FOR 74754 SERIES CAGE (747540247 NO NEED PRINTED)

WEEK/YEAR DATE CODE TABLE

WW	WEEK OF THE YEAR 01 THRU 52 (EXAMPLE:01= FIRST WEEK OF YEAR 52=LAST WEEK OF YEAR)
YY	16, 17, 18 ETC. EXAMPLE: YEAR 2016 = 16


NOTES:

- MATERIAL:
CAGE: 0.25mm THICK COPPER ALLOY, NICKEL PLATED.
SPRING FINGERS: 0.10mm THICK COPPER ALLOY, NICKEL PLATED.
HEATSINK: ALUMINUM, NICKEL PLATED.
HEATSINK SPRING CLIP: STAINLESS STEEL.
- PRESS FIT LEGS 3.05mm LONG
- PORTS ARE DESIGNED FOR SFP+ TRANSCEIVERS AND ARE COMPATIBLE WITH SFP TRANSCEIVERS. THE TOP SURFACE OF THE MODULE MUST BE FLAT (NO PRODUCT LABEL RECESS) AND THERMALLY CONDUCTIVE TO FUNCTION OPTIMALLY.
- WELD SPOT MAY SHOW SLIGHT MATERIAL DISCOLORATION.
- NO RoHS EXEMPTIONS.
- CUSTOM HEATSINKS AVAILABLE UPON REQUEST.


QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS		SCALE		molex	
▽ = 0	▽ = 0	▽ = 0	▽ = 0	MM	3:1	DRWN BY DATE			
▽ = 0	▽ = 0	▽ = 0	▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		MKEMPEGOWDA 2016/04/13		SFP+ 1X2 CAGE, 3.05 MM PRESS FIT, HEAT SINK, EMI SPRING FINGERS	
▽ = 0	▽ = 0	▽ = 0	▽ = 0	ANGULAR TOL ± 1.0 °		CHKD BY DATE			
▽ = 0	▽ = 0	▽ = 0	▽ = 0	4 PLACES ±		DSUN15 2016/07/31		PRODUCT CUSTOMER DRAWING	
▽ = 0	▽ = 0	▽ = 0	▽ = 0	3 PLACES ±		APPR BY DATE			
▽ = 0	▽ = 0	▽ = 0	▽ = 0	2 PLACES ± 0.13		RCHEN08 2016/08/04		SERIES MATERIAL NUMBER CUSTOMER	
▽ = 0	▽ = 0	▽ = 0	▽ = 0	1 PLACE ± 0.25		DRAWING SIZE THIRD ANGLE PROJECTION			
▽ = 0	▽ = 0	▽ = 0	▽ = 0	0 PLACES ±		C		11112	
▽ = 0	▽ = 0	▽ = 0	▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE SHEET 3	
▽ = 0	▽ = 0	▽ = 0	▽ = 0					DOCUMENT NUMBER 111122220	
▽ = 0	▽ = 0	▽ = 0	▽ = 0					DOC TYPE PSD	
▽ = 0	▽ = 0	▽ = 0	▽ = 0					DOC PART ASY	
▽ = 0	▽ = 0	▽ = 0	▽ = 0					SHEET NUMBER 1 OF 7	

CAGE ASSEMBLY OPTIONS

OPEN TOP
1111120220
SHOWN
(APPLIES TO ALL
OPEN TOP CAGES)

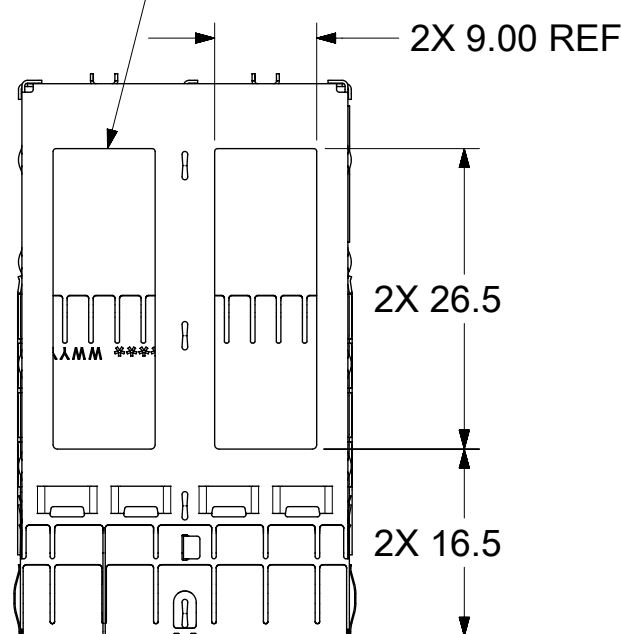

HEATSINK OPTIONS
(2 PLC)
CUSTOM

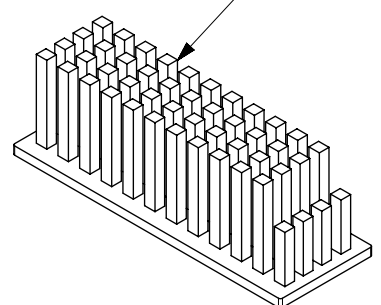


OVERALL HEATSINK HEIGHT

STYLE	DIM 'A'	DIM 'B'
CUSTOM	20.4	16.7

HEATSINK OPTIONS
(2 PLC)

PIN FIELD NETWORKING
PIN FIELD SAN
PIN FIELD PCI

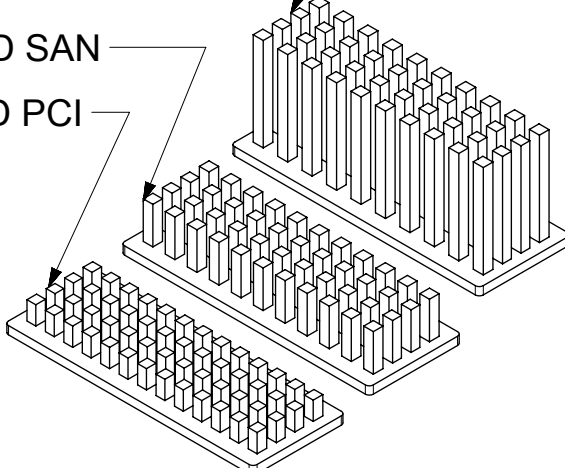


OVERALL HEATSINK HEIGHT

APPLICATION	STYLE	DIM 'A'
PCI	PIN FIELD	14.3
SAN	PIN FIELD	16.6
NETWORKING	PIN FIELD	23.6

NOTE: PCI - 13 ROWS
SAN - 11 ROWS
NETWORKING - 10 ROWS

HEATSINK OPTIONS
(2 PLC)

LATERAL FIN NETWORKING
LATERAL FIN SAN
LATERAL FIN PCI

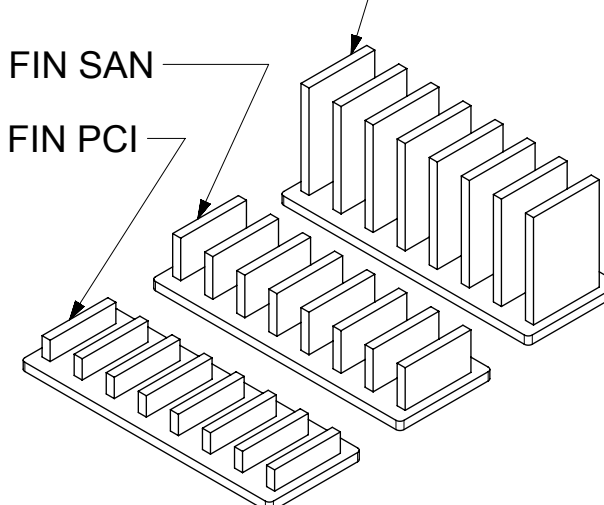


OVERALL HEATSINK HEIGHT

APPLICATION	STYLE	DIM 'A'
PCI	LATERAL FIELD	14.3
SAN	LATERAL FIELD	16.6
NETWORKING	LATERAL FIELD	23.6



HEATSINK OPTIONS
(2 PLC)

WIDE GAP NETWORKING
WIDE GAP SAN
WIDE GAP PCI

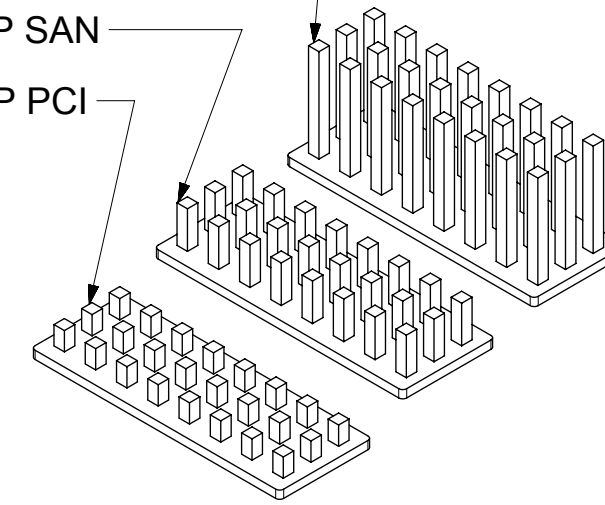

OVERALL HEATSINK HEIGHT

APPLICATION	STYLE	DIM 'A'
PCI	WIDE GAP PIN	14.3
SAN	WIDE GAP PIN	16.6
NETWORKING	WIDE GAP PIN	23.6

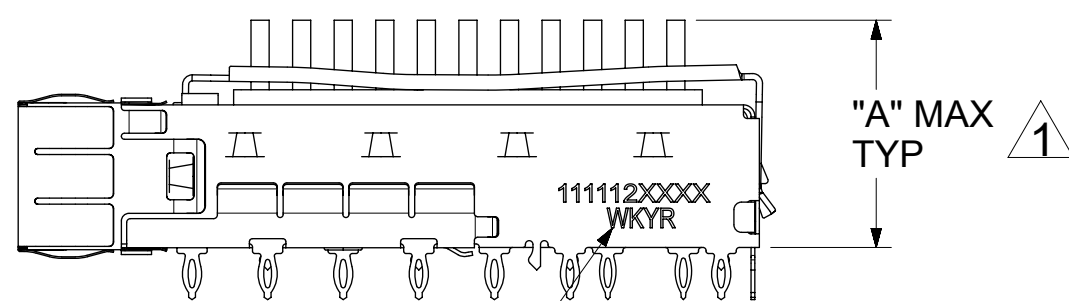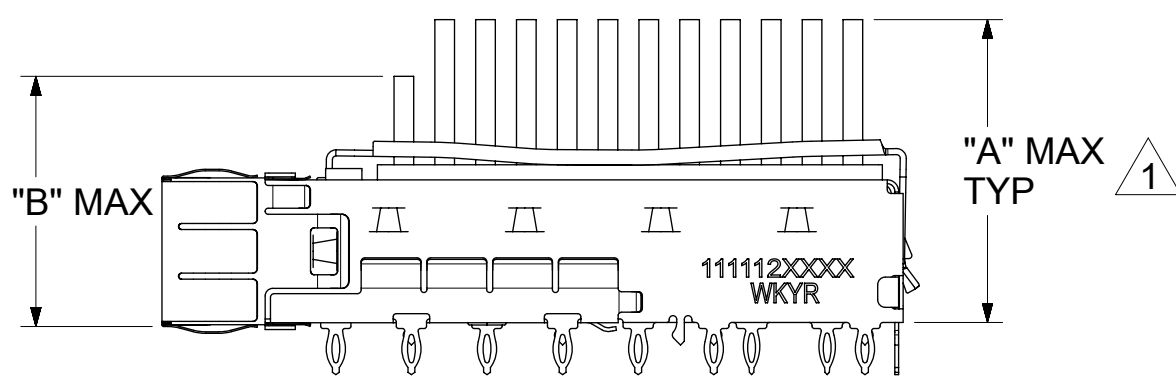


PN/DATE CODE TO BE PRINTED ON THE SIDE OF
COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN.
FOR 111112 SERIES CAGES


WEEK/YEAR DATE CODE TABLE	
WW	01 THRU 52 OR 53 EXAMPLE: 01 = FIRST WEEK OF YEAR 52 = LAST WEEK OF YEAR
YY	16, 17, 18 ETC. EXAMPLE: YEAR 2016 = 16

1 WITH MODULE INSERTED, DIMENSION MAY BE LESS DUE TO MODULE AND HEATSINK VARIATIONS

REAR LEG OPTIONS
(PER PORT)

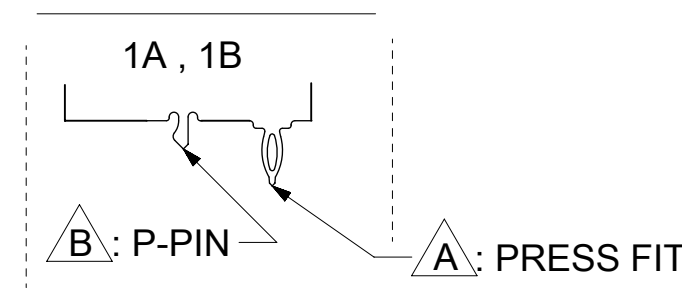

HEATSINK OPTIONS
CUSTOM FIN



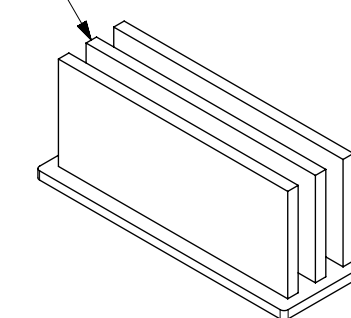


OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
CUSTOM	23.6

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS		SCALE	
	MM	1.5:1				
▽ = 0	SEE REVISION TABLE EC NO: 111626 DRWN: SJLG CHKD: DSUN15 REV: APPR: RCHEN08 DATE: 2016/12/15 DATE: 2016/12/21 DATE: 2016/12/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRWN BY	DATE	
▽ = 0		ANGULAR TOL ± 1.0 °		MKEMPEGOWDA	2016/04/13	
▽ = 0		4 PLACES ±	CHKD BY	DATE		
▽ = 0		3 PLACES ±	DSUN15	2016/07/31		
▽ = 0		2 PLACES ± 0.13	APPR BY	DATE		
▽ = 0		1 PLACE ± 0.25	RCHEN08	2016/08/04		
▽ = 0	0 PLACES ±	DRAWING SIZE	THIRD ANGLE PROJECTION			
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	C				
		PRODUCT CUSTOMER DRAWING		SERIES MATERIAL NUMBER CUSTOMER		
				111112	SEE SHEET 3	
				DOCUMENT NUMBER	DOC TYPE DOC PART SHEET NUMBER	
				1111122220	PSD ASY 2 OF 7	





PART NUMBER SELECTION

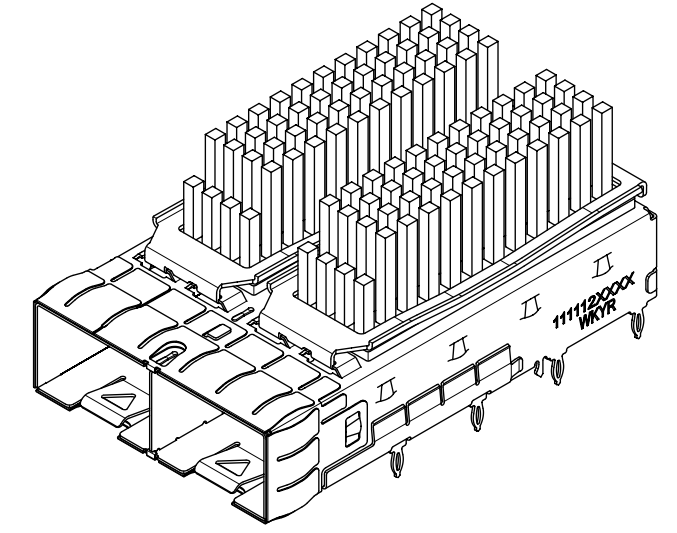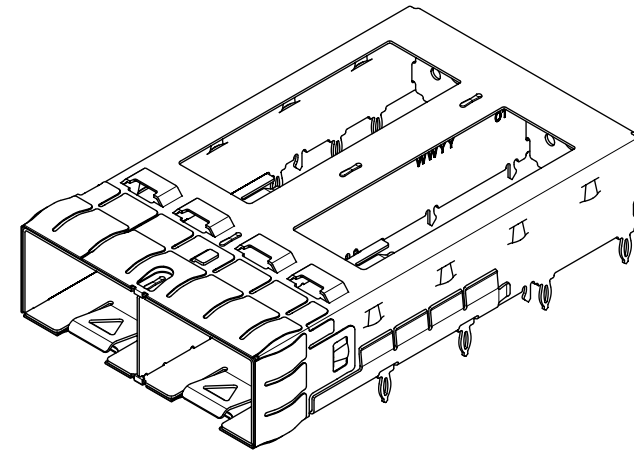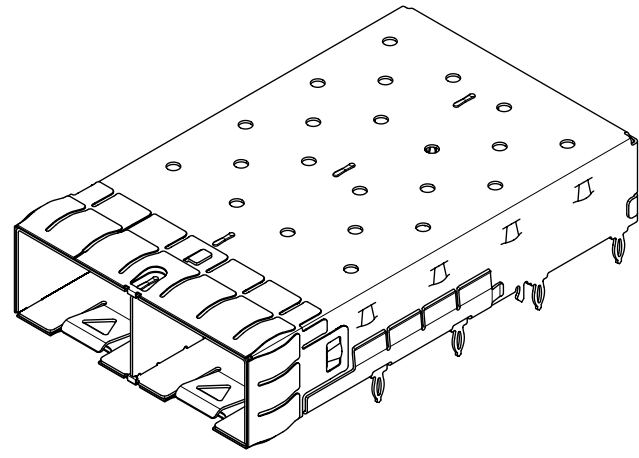

SFP+ CLOSED TOP BASE CAGE	
PART NO.	DESCRIPTION
747540220	SFP FOOTPRINT (STD B TO B), 5 WELD POINTS
747540222	SFP FOOTPRINT (STD B TO B), 16 WELD POINTS
747540247	SAME AS ABOVE BUT NO PN/DATE CODE PRINTED

SFP+ OPEN TOP BASE CAGE FOR HEATSINK	
PART NO.	
	1111120220

SFP+ CUSTOM HEATSINK OPTION	
PART NO.	
	1111120226

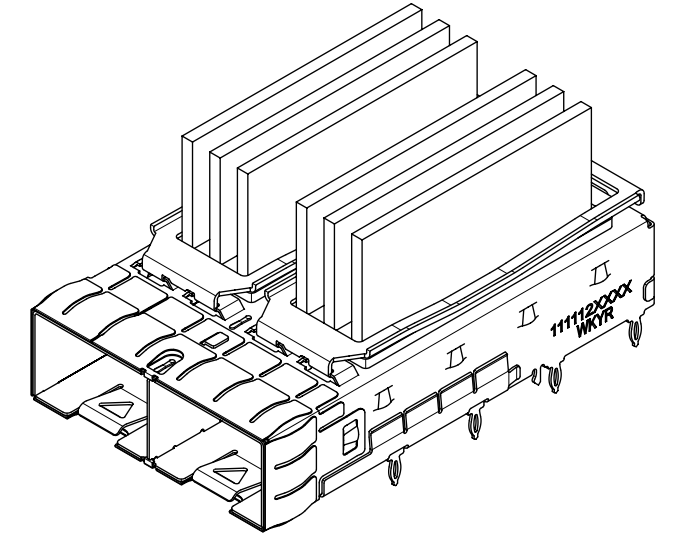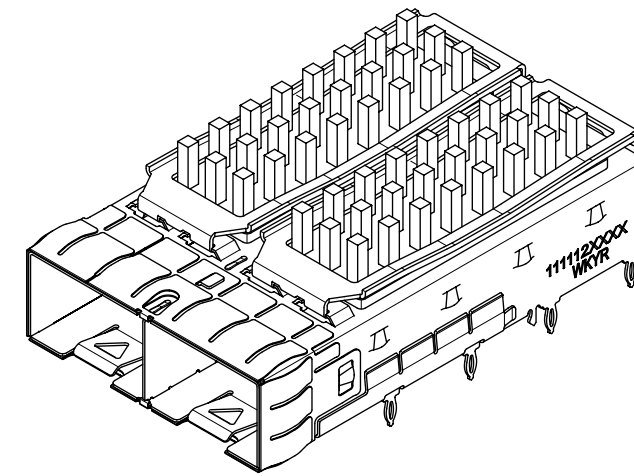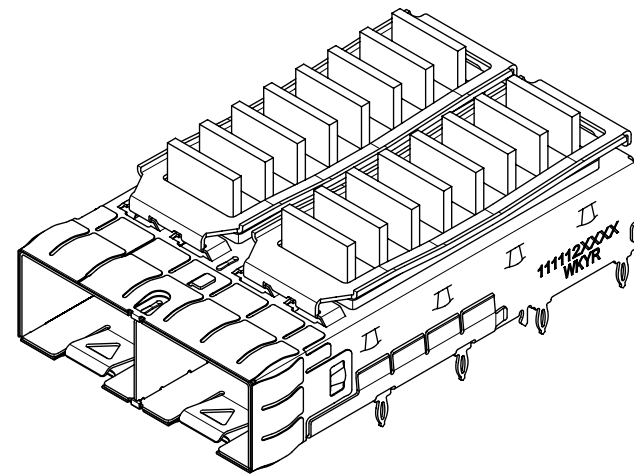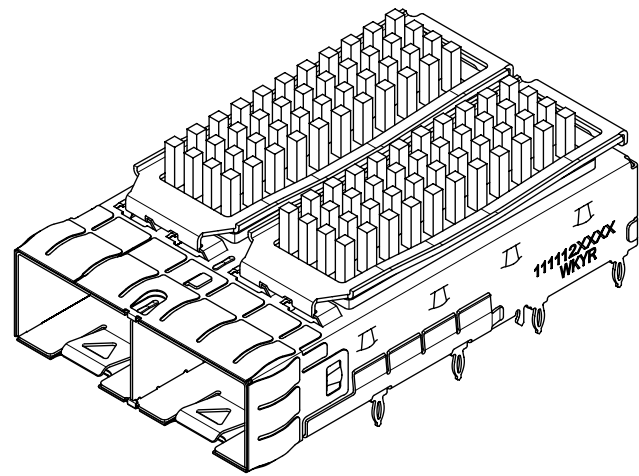

SFP+ PIN FIELD HEATSINK OPTION	
PART NO.	APPLICATION
1111121220	PCI
1111122220	SAN
1111123220	NETWORKING

SFP+ LATERAL FIN HEATSINK OPTION	
PART NO.	APPLICATION
1111124220	PCI
1111125220	SAN
1111126220	NETWORKING



SFP+ LATERAL FIN HEATSINK OPTION	
PART NO.	APPLICATION
1111127220	PCI
1111128220	SAN
1111129220	NETWORKING

SFP+ CUSTOM FIN HEATSINK OPTION	
PART NO.	
	1111126221

NOTE: PCI - 13 ROWS
 SAN - 11 ROWS
 NETWORKING - 10 ROWS

QUALITY SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	SEE REVISION TABLE EC NO: 111626 DRWN: SJLG CHKD: DSUN15 REV: APPR: RCHEN08	2016/12/15	2016/12/21	2016/12/21	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION UNITS	SCALE			
		ANGULAR TOL ± 1.0 °		MM	1.25:1						
		4 PLACES ±	3 PLACES ±	2 PLACES ± 0.13	1 PLACE ± 0.25	0 PLACES ±	DRWN BY	DATE	SFP+ 1X2 CAGE, 3.05 MM PRESS FIT, HEAT SINK, EMI SPRING FINGERS		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					MKEMPEGOWDA	2016/04/13			
							CHKD BY	DATE	PRODUCT CUSTOMER DRAWING		
						DSUN15	2016/07/31				
						APPR BY	DATE	SERIES MATERIAL NUMBER CUSTOMER 111112 SEE SHEET 3			
						RCHEN08	2016/08/04				
						DRAWING SIZE	THIRD ANGLE PROJECTION	DOCUMENT NUMBER DOC TYPE DOC PART SHEET NUMBER 1111122220 PSD ASY 3 OF 7			
					C						


PCB LAYOUT - SINGLE SIDE ONLY

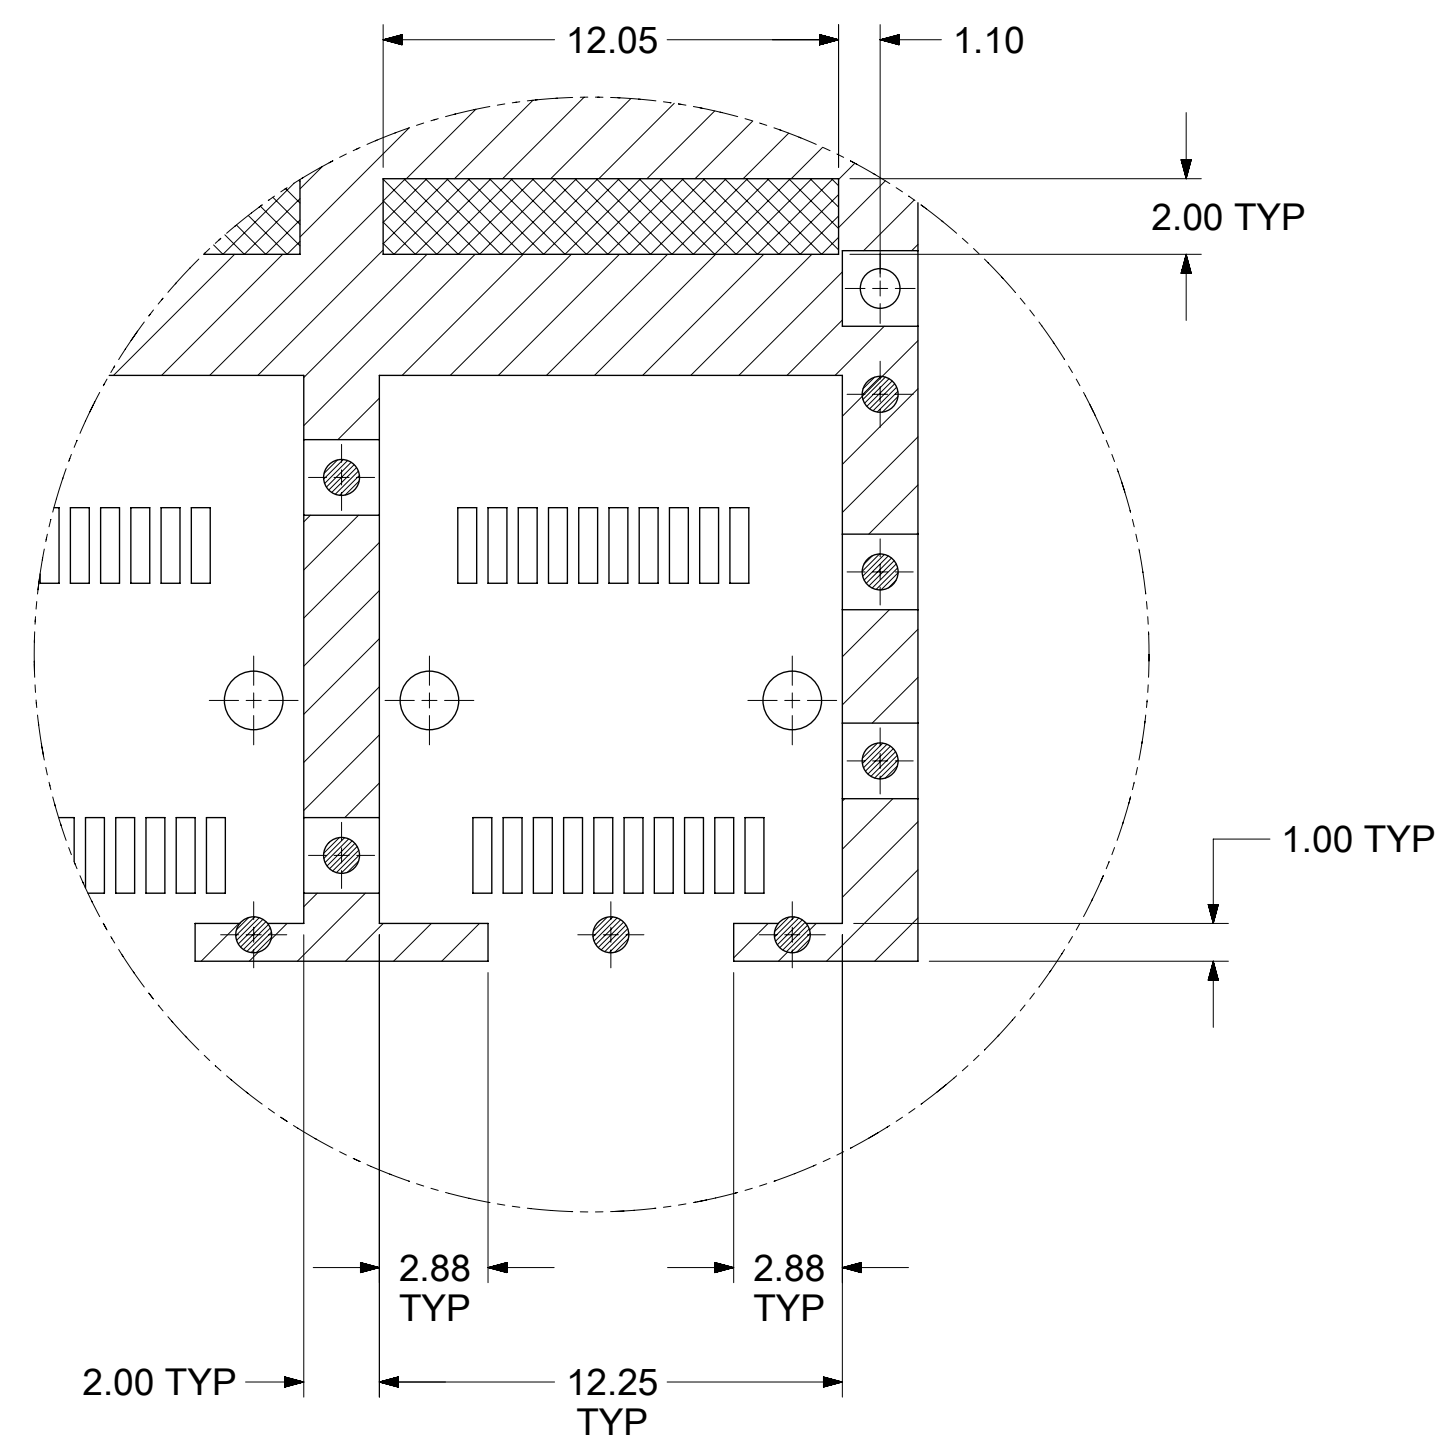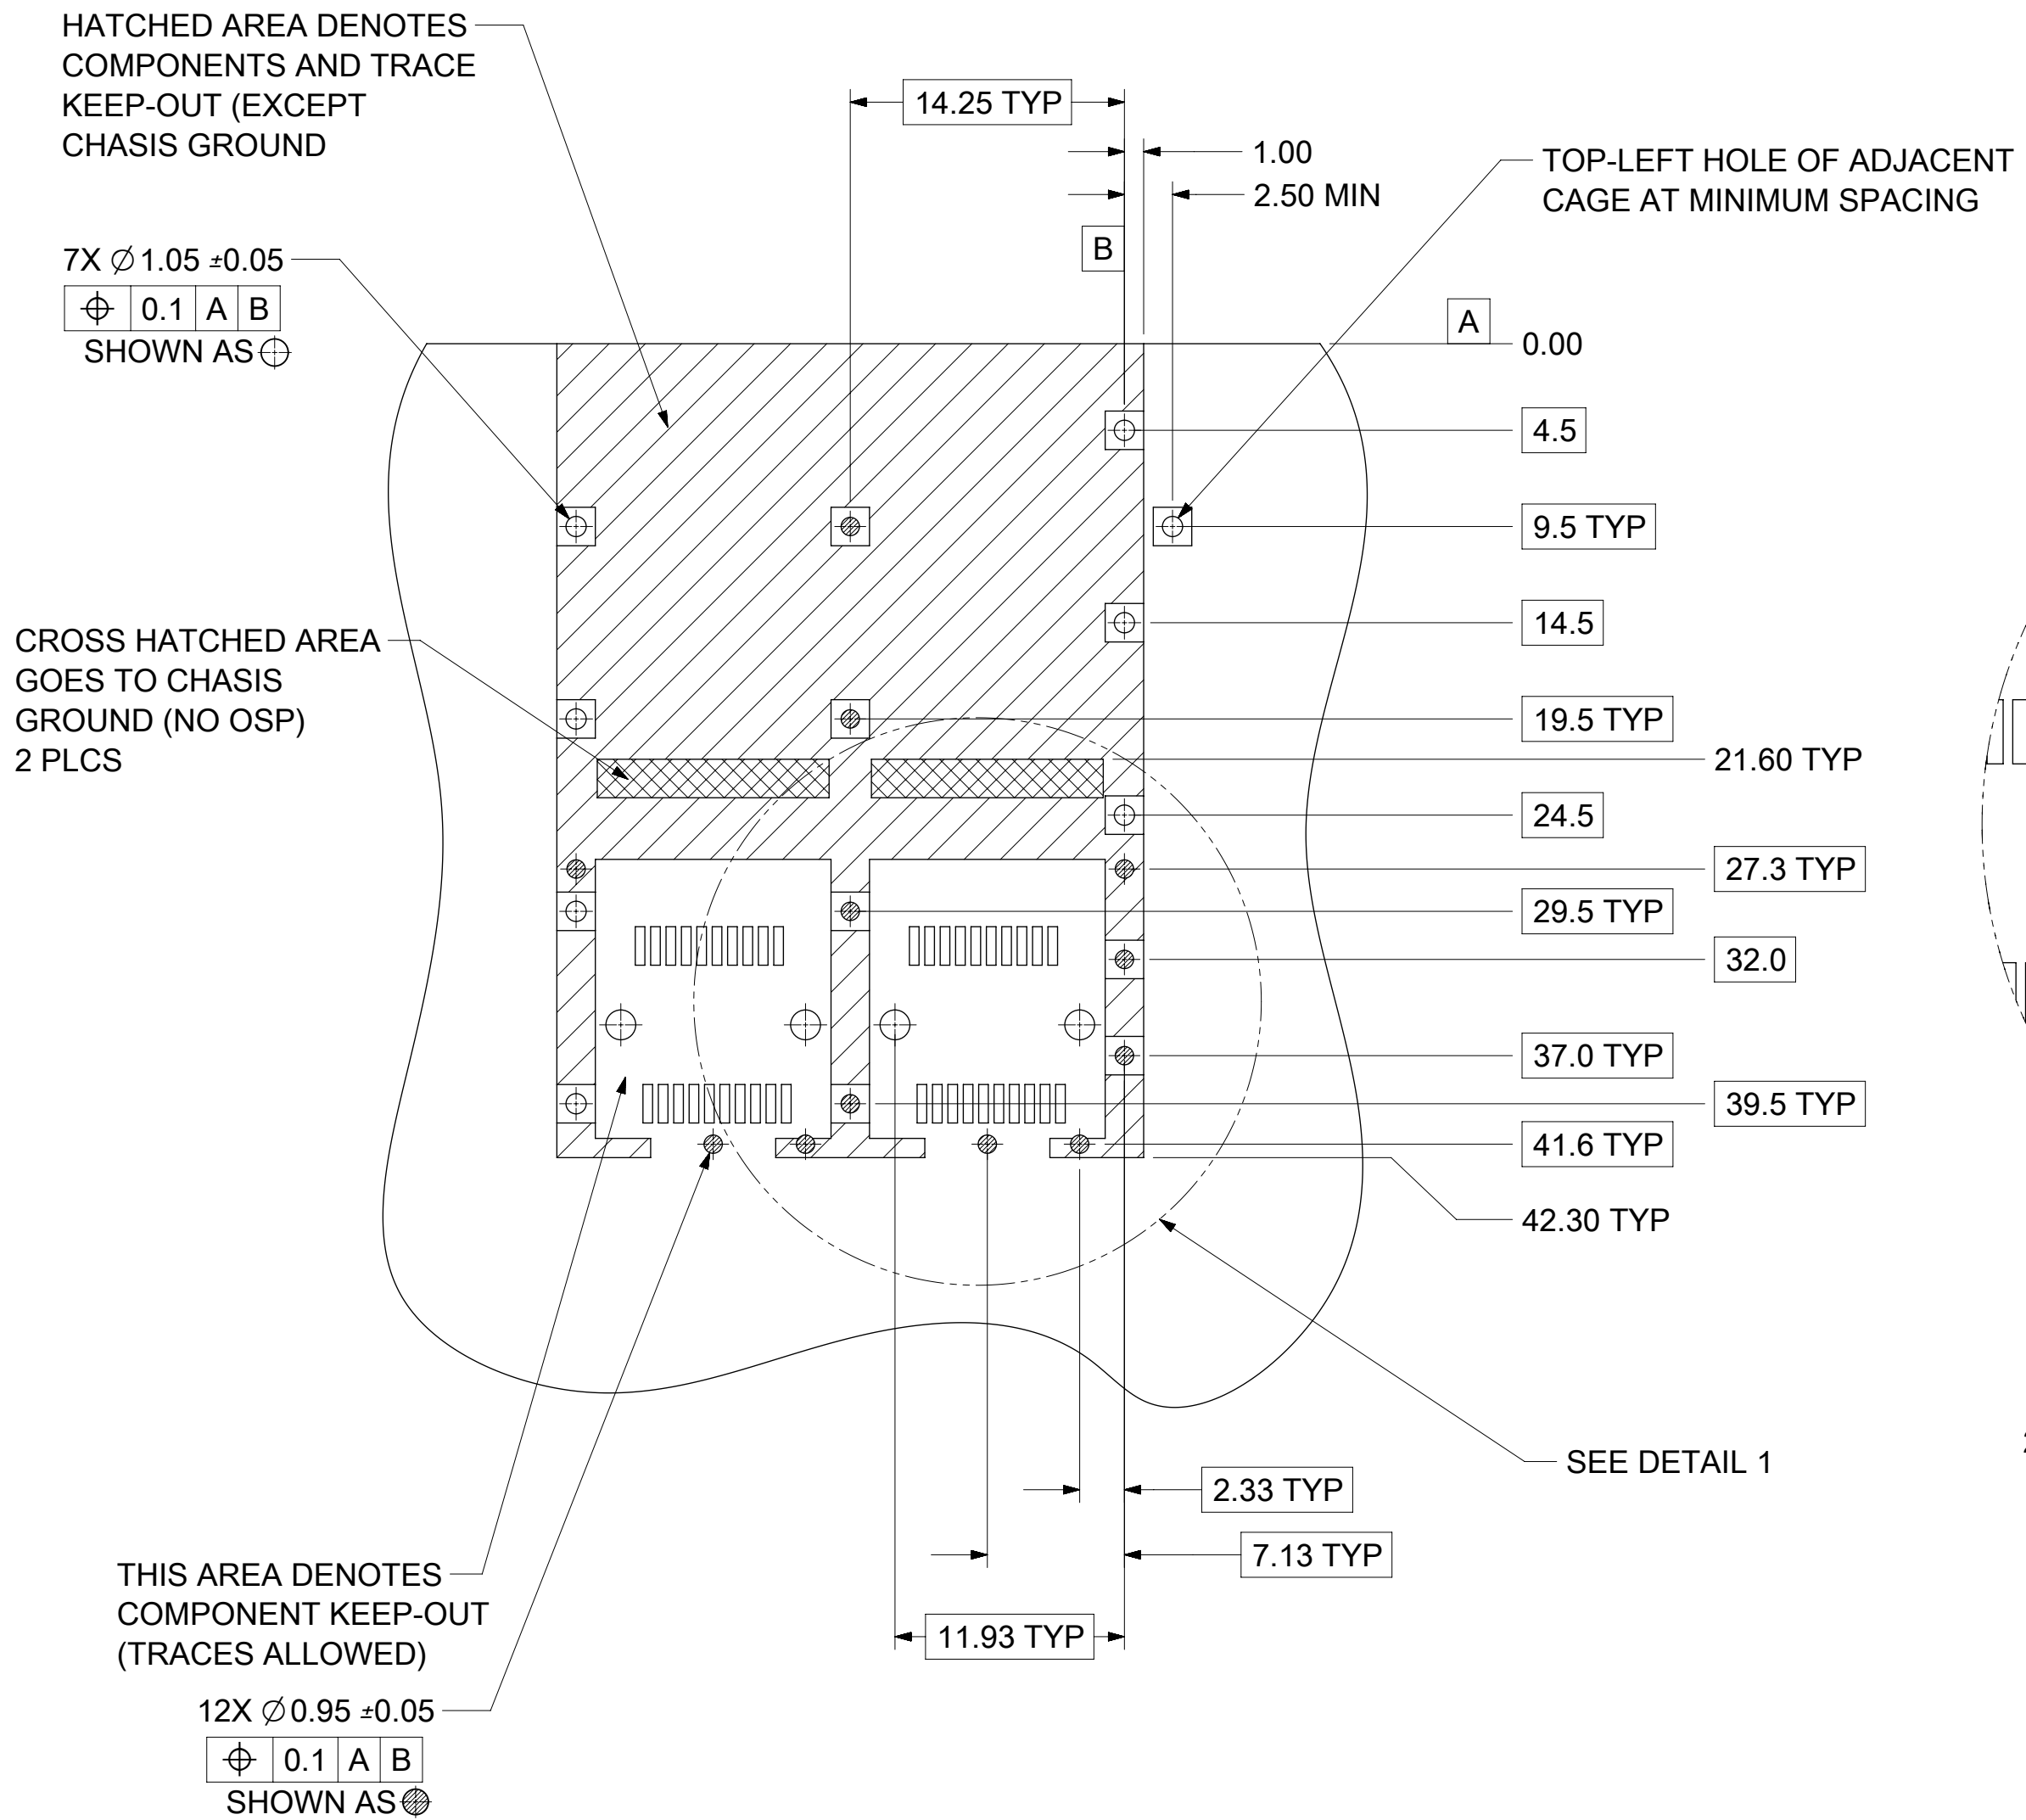

- NOTES:
1. PADS AND VIAS CONNECT TO CHASSIS GROUND
RECOMMEND PADS TO BE 2.00mm SQUARE
 2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
 3. CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT.
 4. SPACING BETWEEN PORTS IS 14.25mm
 5. 1.57mm MINIMUM PCB THICKNESS FOR SINGLE SIDED USE.

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
▽ = 0	▽ = 0	SEE REVISION TABLE	EC NO: 111626 DRWN: SJLG CHKD: DSUN15 REV: APPR: RCHEN08	GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION UNITS		SCALE		
▽ = 0	▽ = 0			ANGULAR TOL ± 1.0 °				MM		1:1		
▽ = 0	▽ = 0			4 PLACES ±		DRWN BY		DATE		MKEMPEGOWDA 2016/04/13		
▽ = 0	▽ = 0			3 PLACES ±		CHKD BY		DATE		DSUN15 2016/07/31		
▽ = 0	▽ = 0			2 PLACES ± 0.13		APPR BY		DATE		RCHEN08 2016/08/04		
▽ = 0	▽ = 0			1 PLACE ± 0.25		DRAWING SIZE		THIRD ANGLE PROJECTION		C		
▽ = 0	▽ = 0	0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						PRODUCT CUSTOMER DRAWING SERIES: 111112 MATERIAL NUMBER: SEE SHEET 3 CUSTOMER:		
□ = 0	■ = 0	J2		DOCUMENT NUMBER: 1111122220		DOC TYPE: PSD		DOC PART: ASY		SHEET NUMBER: 4 OF 7		

PCB LAYOUT FOR BELLY TO BELLY MOUNTING

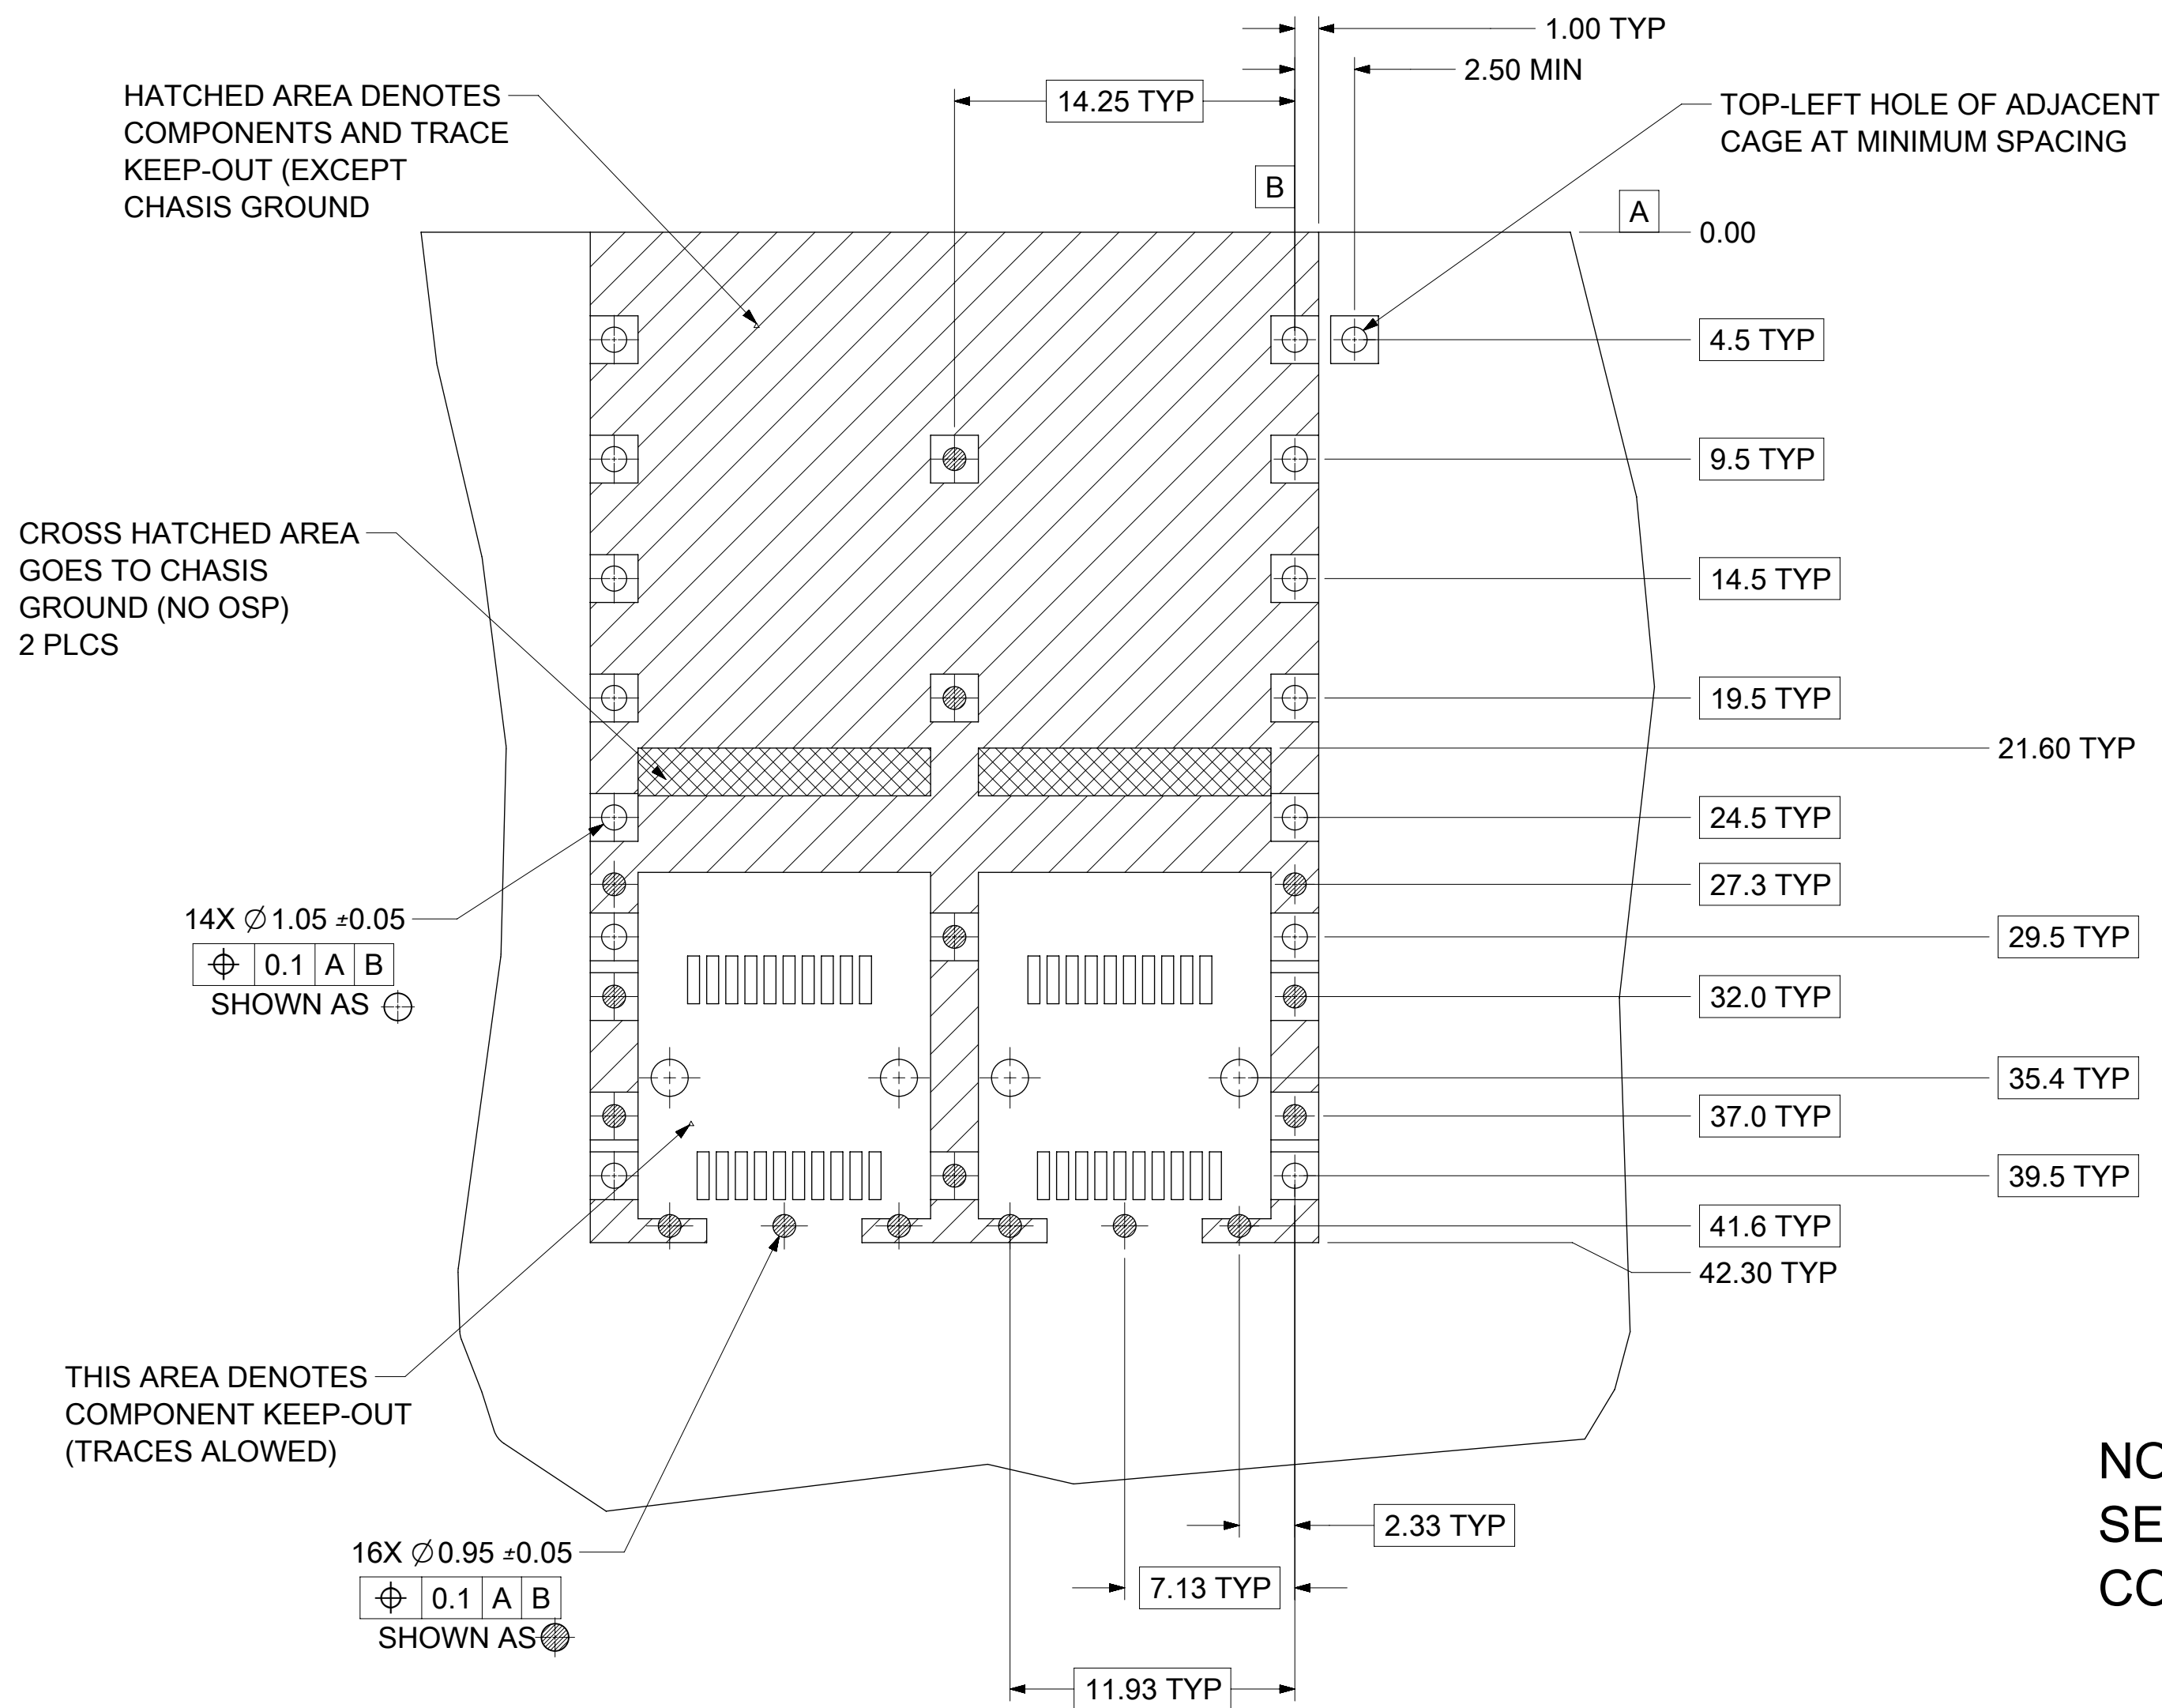



NOTE:
SEE SHEET 4 FOR HOST CONNECTOR DETAIL

NOTES:



1. PADS AND VIAS CONNECT TO CHASSIS GROUND
RECOMMEND PADS TO BE 2.00mm SQUARE
2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
3. CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT.
4. SPACING BETWEEN PORTS IS 14.25mm
5. 3.00mm [.118 INCH] MINIMUM PCB THICKNESS FOR BELLY TO BELLY USE.

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	SEE REVISION TABLE EC NO: 111626 DRWN: SJLKG CHKD: DSUN15 REV: APPR: RCHEN08		GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL $\pm 1.0^\circ$ 4 PLACES \pm 3 PLACES \pm 2 PLACES ± 0.13 1 PLACE ± 0.25 0 PLACES \pm		DIMENSION UNITS: MM SCALE: 4:1		DRWN BY: MKEMPEGOWDA DATE: 2016/04/13		CHKD BY: DSUN15 DATE: 2016/07/31		APPR BY: RCHEN08 DATE: 2016/08/04
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE: C		THIRD ANGLE PROJECTION		SERIES: 111112 MATERIAL NUMBER: SEE SHEET 3 CUSTOMER:		PRODUCT CUSTOMER DRAWING		DOCUMENT NUMBER: 11111222220 DOC TYPE: PSD DOC PART: ASY SHEET NUMBER: 5 OF 7	

BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING (SPRING FINGER)

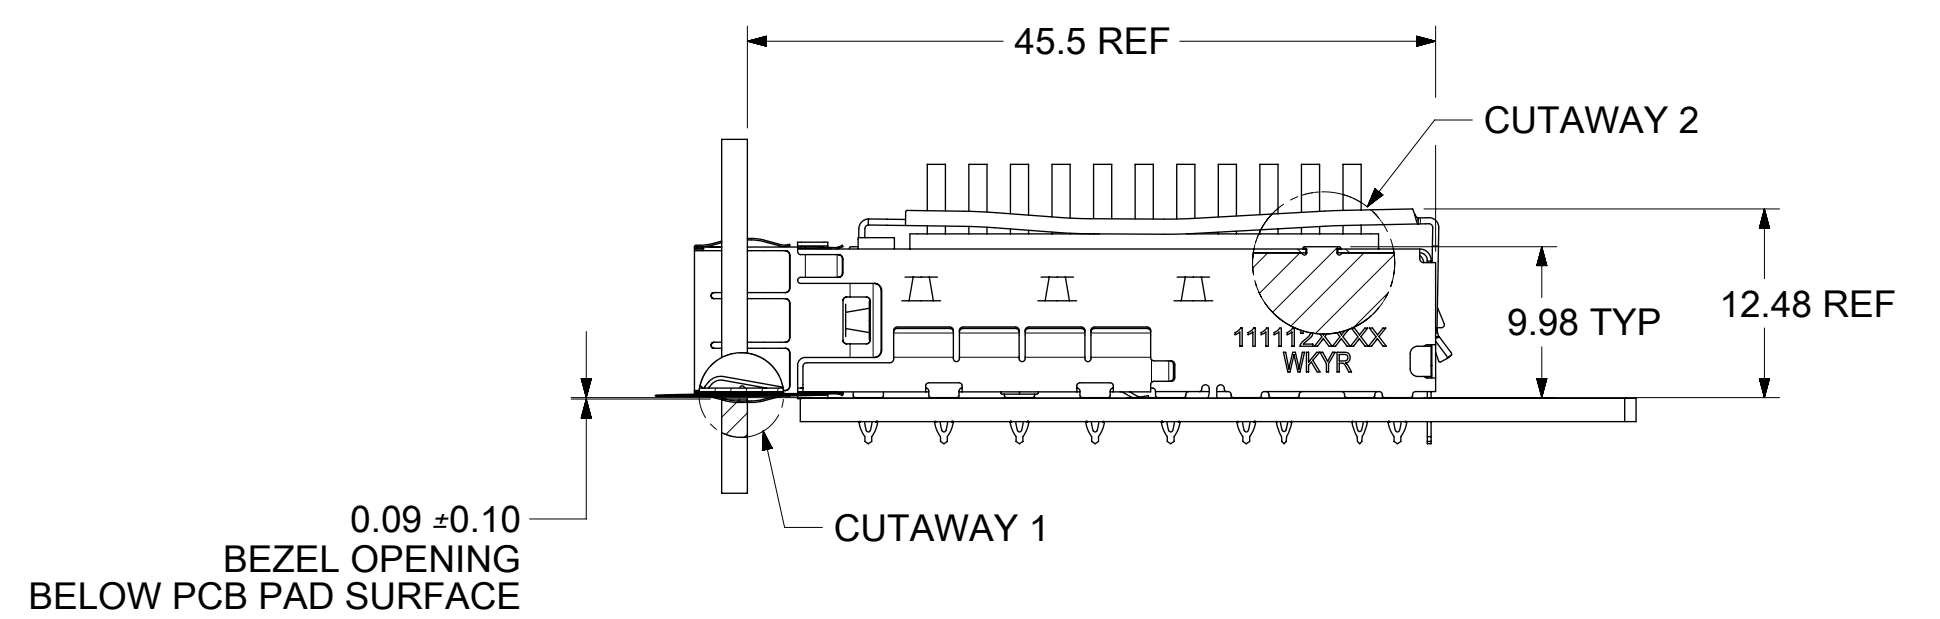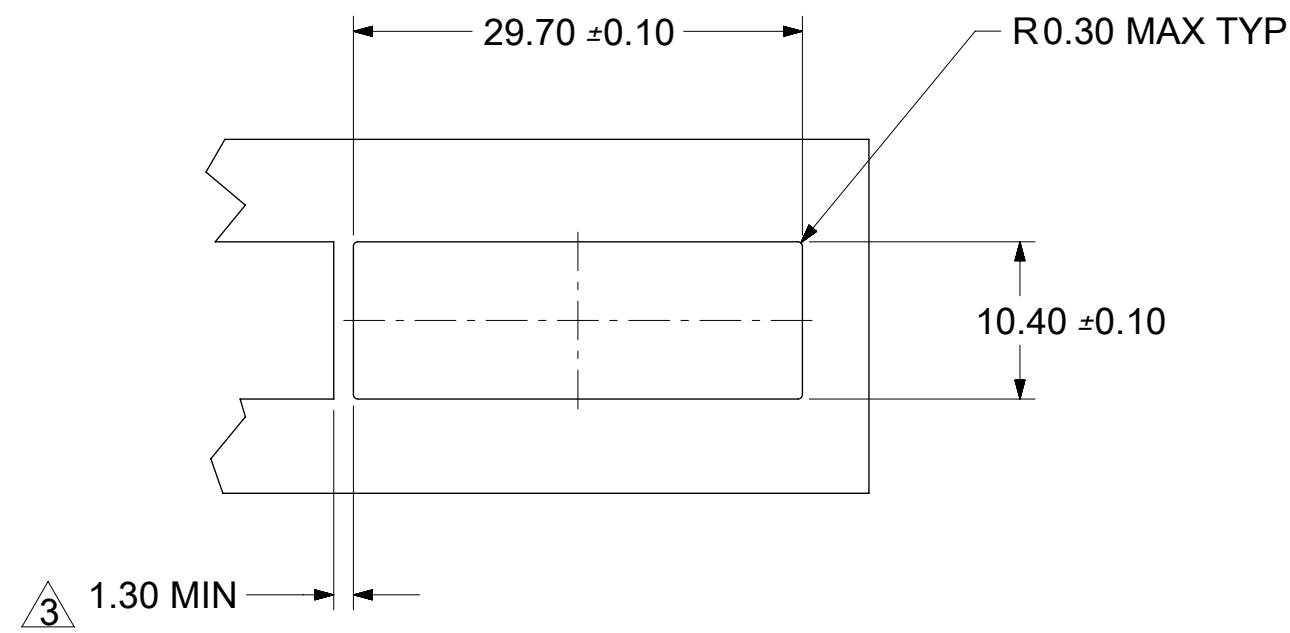



BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING (SPRING FINGER)

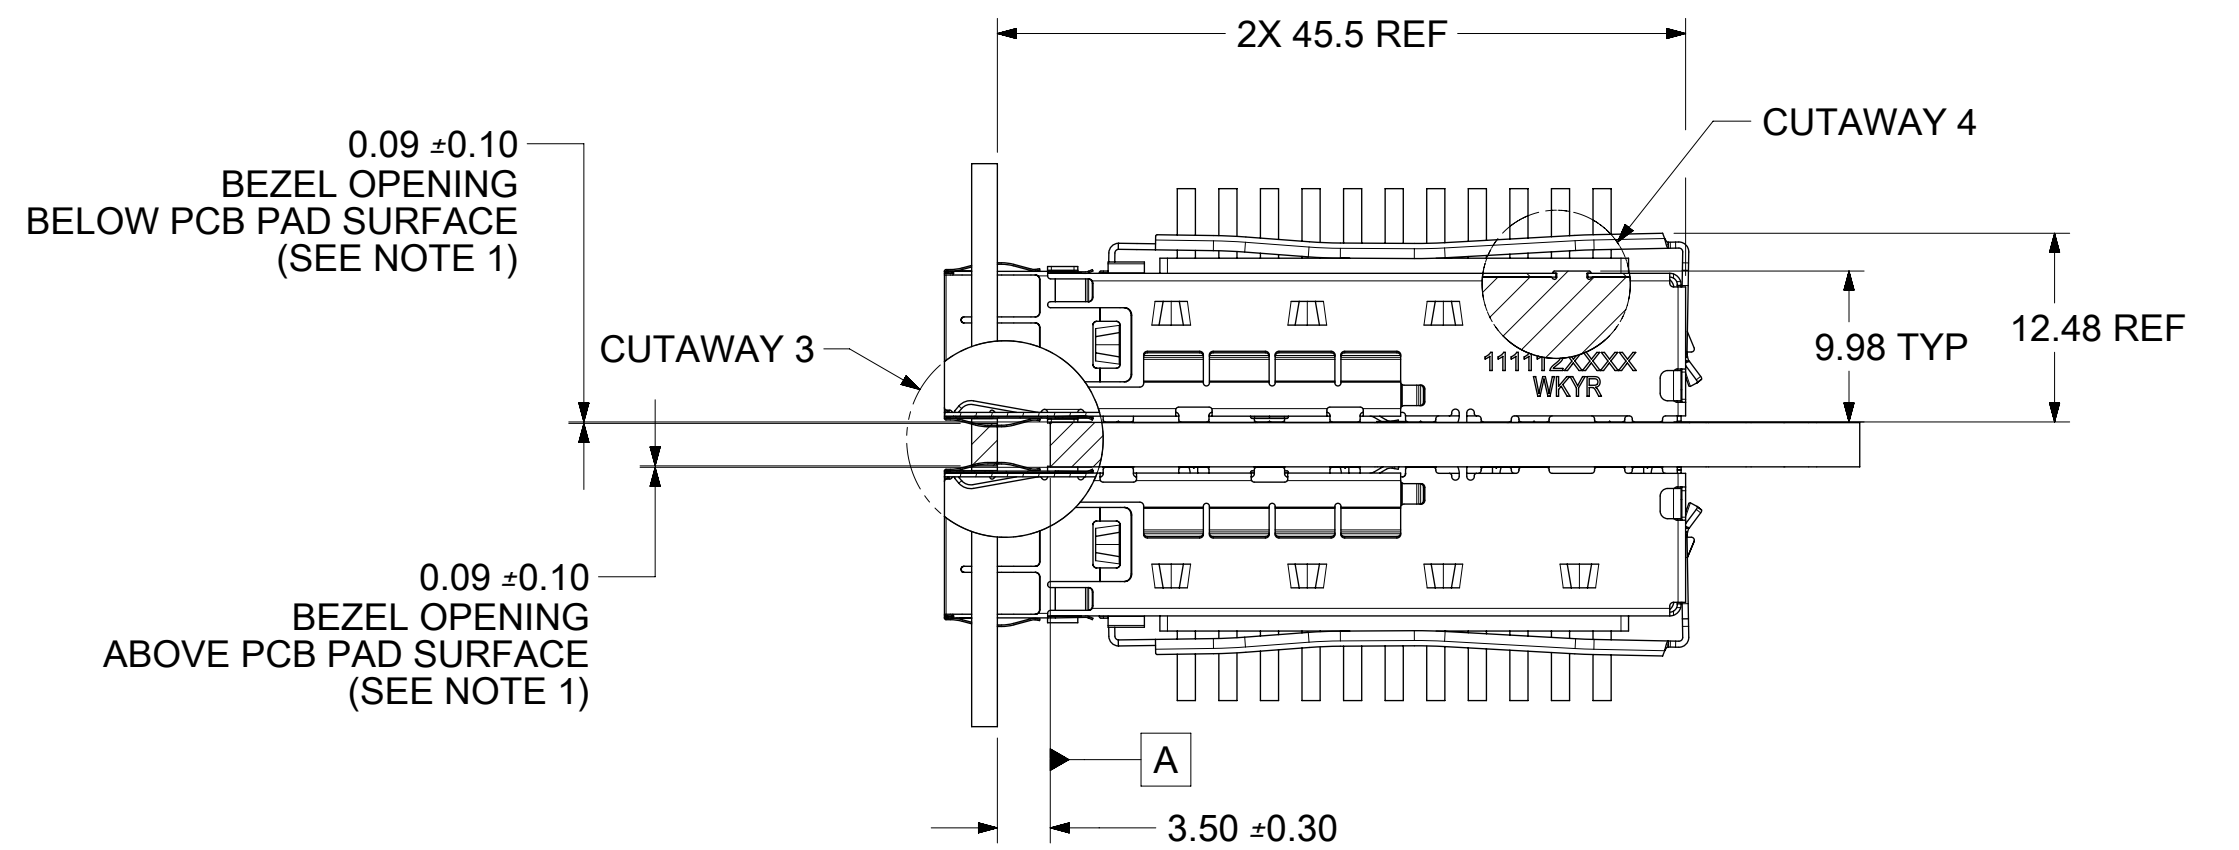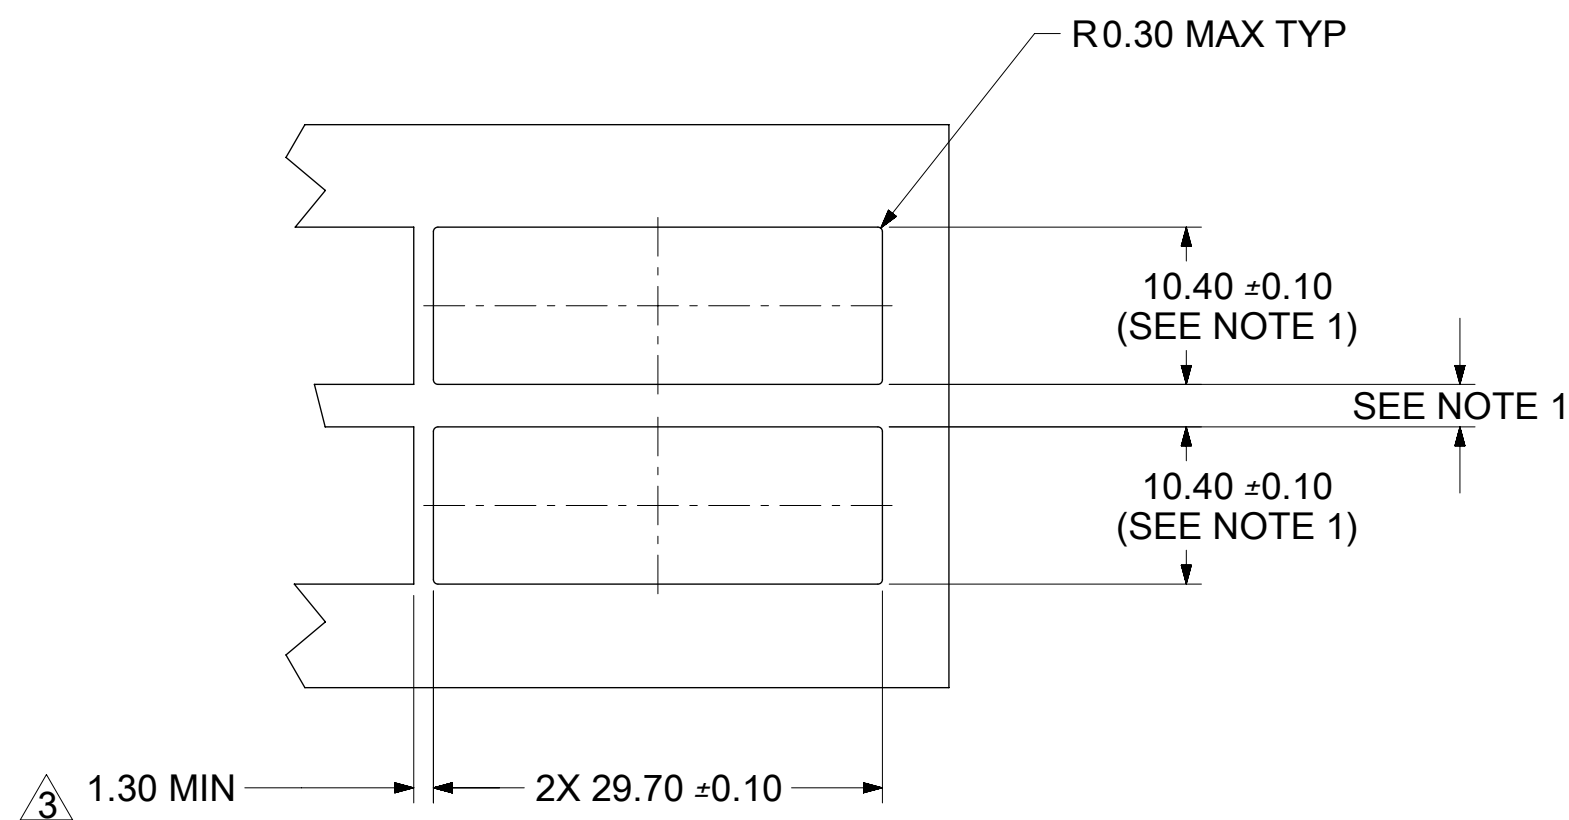

- NOTE:**
1. PCB THICKNESS VARIATION MUST BE CONSIDERED WHEN DETERMINING BEZEL OPENING SIZE AND LOCATION.
 2. CAGE LEG STANDOFF WILL PIERCE BELLY GASKET WHEN PROPERLY PRESSED INTO PCB.
 3. THIS DIMENSION IS FOR REF ONLY. USER CAN MODIFY IT DEPENDS ON APPLICATION. HOLE OF ADJACENT CAGE ON PCB LAYOUT VARIES ON MODIFICATION.







QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS		SCALE		molex	
▽ = 0	▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		MM		2:1			
▽ = 0	▽ = 0	ANGULAR TOL ± 1.0 °		DRWN BY		DATE		SFP+ 1X2 CAGE, 3.05 MM PRESS FIT, HEAT SINK, EMI SPRING FINGERS	
▽ = 0	▽ = 0	4 PLACES ±		MKEMPEGOWDA		2016/04/13			
▽ = 0	▽ = 0	3 PLACES ±		CHKD BY		DATE		PRODUCT CUSTOMER DRAWING	
▽ = 0	▽ = 0	2 PLACES ± 0.13		DSUN15		2016/07/31			
▽ = 0	▽ = 0	1 PLACE ± 0.25		APPR BY		DATE		SERIES MATERIAL NUMBER CUSTOMER	
▽ = 0	▽ = 0	0 PLACES ±		RCHEN08		2016/08/04			
▽ = 0	▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE		THIRD ANGLE PROJECTION		DOCUMENT NUMBER DOCTYPE DOC PART SHEET NUMBER	
▽ = 0	▽ = 0	J2		C		11112			

REV	DATE	DESCRIPTION
A	2011/06/10	INITIAL RELEASE
A1	2011/06/15	SHEET 1: REMOVED HEATSINK OPENING REFERENCE DIMENSIONS AND WEEK 52 REFERENCE; SHEET 4: ADDED NOTES POINTING TO THE INNER WALL COINED OVER THE COVER.
B	2011/07/22	ADDED HOLES IN CAGE FOR LIGHTPIPES; MOVED DATE CODE; REVISED ROHS NOTE 5; CHANGED HEATSINK HEIGHT FROM 8.63 TO 6.5; TABULARIZED PCI, SAN, AND NETWORKING; AND ADDED HEATSINK HEIGHT WITH MODULE INSERTED.
B1	2011/08/19	UPDATED CAGE AND SPRING CLIP MODELS.
C	2012/10/25	SHEET 1: REMOVED HEATSINKS, AND ALL DIMS AND ANNOTATIONS RELATING TO THEM, FROM ALL VIEWS; REMOVED NOTE 6; REMOVED EXPLODED VIEW; REMOVED PART NUMBER TABLE; ADDED TITLE. NEW SHEET 2: ISO VIEWS OF CAGE WITH NO HEATSINKS AND VIEWS WITH EACH OF FOUR TYPES AND SIZES OF HEATSINK; ANNOTATIONS ON EACH VIEW INDICATING EACH HEATSINK TYPE AND SIZE; RIGHT SIDE VIEW WITH DIM OF HEATSINK HEIGHT; TABLE UNDER EACH VIEW WITH HEATSINK SIZES AND DIMS; NOTE 1; SHEET TITLE. NEW SHEET 3: ISO VIEWS OF CAGE WITH NO HEATSINKS AND VIEWS WITH EACH OF FOUR DIFFERENT TYPES OF HEATSINK; TABLES UNDER EACH VIEW WITH PART NUMBERS OF EACH SIZE; SHEET TITLE.
D	2014/02/07	SHEET 1: REVISED ALL BASE CAGE DETAILS AND VIEWS FROM 111112-0232 TO 74754-0220. REMOVED INSERTION FORCE INTO PCB FROM NOTE 2. REVISED NOTE 4: "WAS" WELD SPOT WILL SHOW SLIGHT MATERIAL DISCOLORATION. "NOW READS" WELD SPOT MAY SHOW SLIGHT MATERIAL DISCOLORATION. SHEET 2: REVISED ALL HEAT SINK CAGE ASSEMBLY OPTIONS. ADDED OPEN TOP VIEW WITH DIMENSIONS, AND REAR LEG OPTION VIEW. SHEET 3: ADDED SHEET 3 WITH ZSFP+ OPTIONS SHEET 4: ADDED PART NUMBERS 747540220, 1001130220. UPDATED TITLE BLOCK.
E	2014/08/13	SHEET 1: ADDED "REF" TO DIM 10.85 AND 28.25. ADDED 14.0 ±0.1. MOVED "MINIMUM PCB THICKNESS" NOTES FROM SHEET 1 TO SHEETS 5 AND 6.
F	2014/08/21	SHEET 1: ADDED 747540247 NO NEED PRINTED @C6. SHEET 1: ADDED P/N AND DATE CODE PRINTED NOTE @D11. SHEET 4: ADDED P/N 747540247 IN TABLE @I18.
G	2015/02/26	SHEET 3: ADDED NOTE 1 "UNDER BELLY GASKET IS UL94 V-0 RATED." SHEET 4: ADDED "5 WELD POINTS" INTO 747540220 @I17. SHEET 4: ADDED P/N 747540222 @I17. SHEET 7: ADDED NOTE 2 "CAGE LEG STANDOFF WILL PIERCE BELLY GASKET WHEN PROPERLY PRESSED INTO PCB."
H	2015/08/26	SHEET 2: E3 : ADDED NEW CUSTOM FIN HEATSINK ISO VIEW SHEET 4: E3 : ADDED PART NO. 111112-6221 ISO VIEW MODIFIED PCB LAYOUT PER SFF-8433 SHEET 5: K19 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 D17 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 SHEET 6: G19 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 B18 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1
J	2016/06/28	REMASTERED FROM SD-111112-2220 REV H TO "1111122220 REV_J" NX SHEET 2: E10: CHANGED THE PN /DATE CODE STYLE FROM 1 ROW TO 2 ROWS SHEET 7: A19:ADDED A NOTE "THIS DIM IS FOR REF ONLY. USER CAN MODIFY IT DEPENDS ON APPLICATION.HOLE OF ADJACENT CAGE ON PCB LAYOUT VARIES BASED ON MODIFICATION." SEPARATED ZSFP+ SERIES TO 1001130220 PSD ASY
J2	2016/12/16	SHEET 4/5: CORRECTED TYPO TO UPDATE PCB VIEW

QUALITY SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
▽ = 0	▽ = 0	SEE REVISION TABLE EC NO: 111626 DRWN: SJLG CHKD: DSUN15 REV APPR: RCHEN08	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION UNITS		SCALE				
▽ = 0	▽ = 0		ANGULAR TOL ± 1.0 °			MM		1:1				
▽ = 0	▽ = 0		4 PLACES ±			DRWN BY		DATE		SFP+ 1X2 CAGE, 3.05 MM PRESS FIT, HEAT SINK, EMI SPRING FINGERS		
▽ = 0	▽ = 0		3 PLACES ±			MKEMPEGOWDA		2016/04/13				
▽ = 0	▽ = 0		2 PLACES ± 0.13			CHKD BY		DATE		PRODUCT CUSTOMER DRAWING		
▽ = 0	▽ = 0		1 PLACE ± 0.25			DSUN15		2016/07/31				
▽ = 0	▽ = 0	0 PLACES ±			APPR BY		DATE		SERIES MATERIAL NUMBER CUSTOMER 111112 SEE SHEET 3			
▽ = 0	▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			RCHEN08		2016/08/04					
▽ = 0	▽ = 0				DRAWING SIZE		THIRD ANGLE PROJECTION		DOCUMENT NUMBER DOC TYPE DOC PART SHEET NUMBER 1111122220 PSD ASY 7 OF 7			
▽ = 0	▽ = 0				C							

BASE CAGE DETAILS

747540220

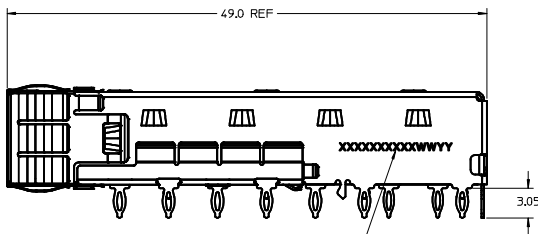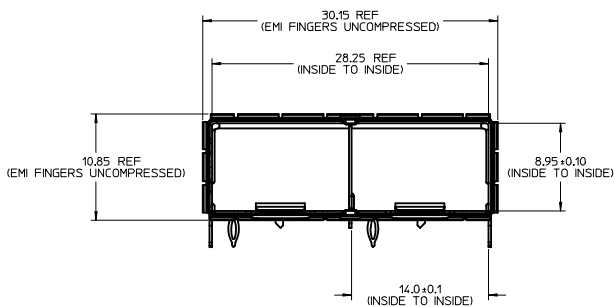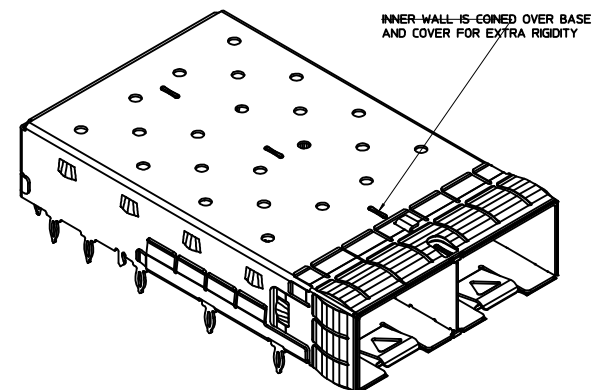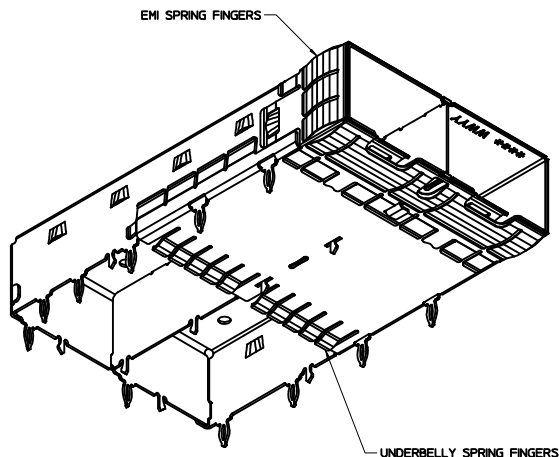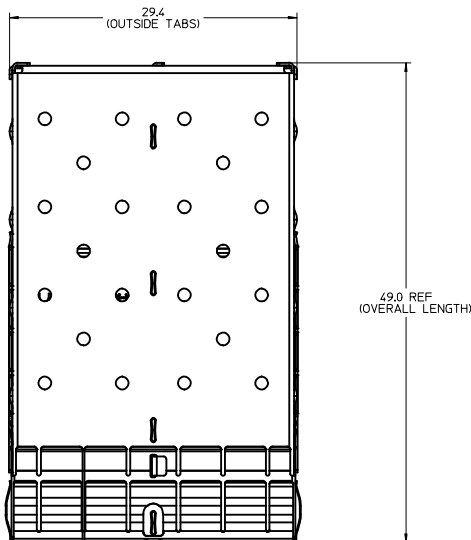

P/N/DATE CODE TO BE PRINTED IN APPROXIMATE AREA AS SHOWN FOR 11112 SERIES CAGE

P/N/DATE CODE TO BE PRINTED ON THE BACK OF COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN FOR 74754 AND 10013 SERIES CAGE (747540247 NO NEED PRINTED)



NOTES:

- MATERIAL:
CAGE: 0.25mm THICK COPPER ALLOY, NICKEL PLATED.
SPRING FINGERS: 0.10mm THICK COPPER ALLOY, NICKEL PLATED.
HEATSINK: ALUMINUM, NICKEL PLATED.
HEATSINK SPRING CLIP: STAINLESS STEEL.
- PRESS FIT LEGS 3.05mm [.120 INCH] LONG
- PORTS ARE DESIGNED FOR SFP+ TRANSCEIVERS AND ARE COMPATIBLE WITH SFP TRANSCEIVERS. THE TOP SURFACE OF THE MODULE MUST BE FLAT (NO PRODUCT LABEL RECESS) AND THERMALLY CONDUCTIVE TO FUNCTION OPTIMALLY.
- WELD SPOT MAY SHOW SLIGHT MATERIAL DISCOLORATION.
- NO ROHS EXEMPTIONS.
- CUSTOM HEATSINKS AVAILABLE UPON REQUEST.

WEEK/YEAR DATE CODE TABLE	
WW	01 THRU 52 OR 53 EXAMPLE: 01 = FIRST WEEK OF YEAR 52 = LAST WEEK OF YEAR
YY	11, 12, 13 ETC. EXAMPLE: YEAR 2013 = 13


SEE REVISION SHEET IEC NO: CPG2015-5742 DRAWN BY: HJW/THSU CHYK: 2015/05/04 APPR:RCHEN08 2015/08/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▽=0	4 PLACES ± mm	MM ONLY	4:1	METRIC	☉	
	▽=0	3 PLACES ± INCH					
	▽=0	2 PLACES ± 0.13					
		1 PLACE ± 0.25					
		0 PLACE ±					
		ANGULAR ±					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
			DRAWN BY: JERWIN	DATE: 2013/11/21	TITLE: SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS		
			CHECKED BY: GBARDELLA	DATE: 2013/11/21			
			APPROVED BY:	DATE:			
			MATERIAL NO. SEE SHEET 4	DOCUMENT NO. SD-11112-2220			
			SIZE D			SHEET NO. 1 OF 8	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

CAGE ASSEMBLY OPTIONS

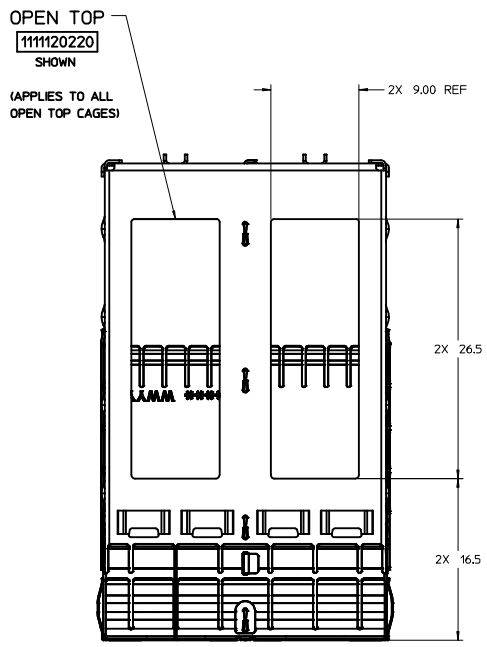

HEATSINK OPTIONS
(2 PLD)
CUSTOM


STYLE	DIM 'A'	DIM 'B'
CUSTOM	20.4	16.7

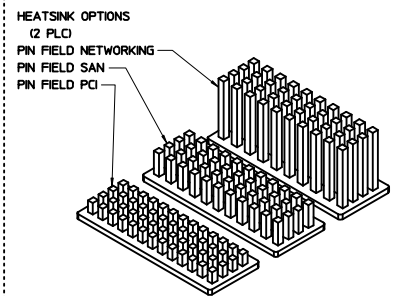

HEATSINK OPTIONS
(2 PLD)
PIN FIELD NETWORKING
PIN FIELD SAN
PIN FIELD PCI


APPLICATION	STYLE	DIM 'A'
PCI	PIN FIELD	14.3
SAN	PIN FIELD	16.6
NETWORKING	PIN FIELD	23.6

NOTE: PCI - 13 ROWS
SAN - 11 ROWS
NETWORKING - 10 ROWS

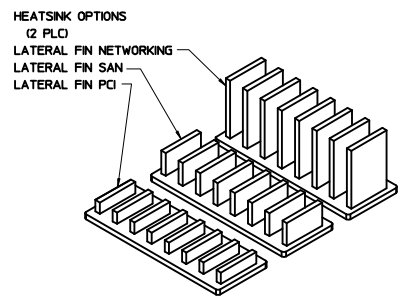



HEATSINK OPTIONS
(2 PLD)
LATERAL FIN NETWORKING
LATERAL FIN SAN
LATERAL FIN PCI

APPLICATION	STYLE	DIM 'A'
PCI	LATERAL FIELD	14.3
SAN	LATERAL FIELD	16.6
NETWORKING	LATERAL FIELD	23.6

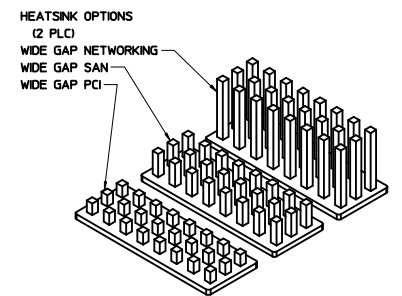

HEATSINK OPTIONS
(2 PLD)
WIDE GAP NETWORKING
WIDE GAP SAN
WIDE GAP PCI

APPLICATION	STYLE	DIM 'A'
PCI	WIDE GAP PIN	14.3
SAN	WIDE GAP PIN	16.6
NETWORKING	WIDE GAP PIN	23.6

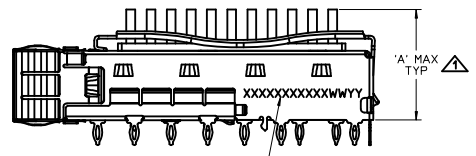
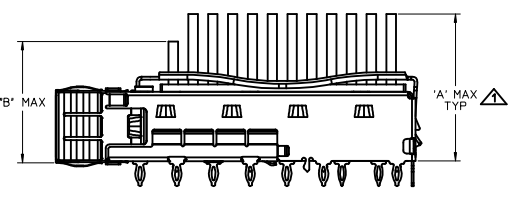


PN/DATE CODE TO BE PRINTED ON THE SIDE OF COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN, FOR 11112 SERIES CAGES

WEEK/YEAR DATE CODE TABLE	
WW	01 THRU 52 OR 53 EXAMPLE: 01 = FIRST WEEK OF YEAR 52 = LAST WEEK OF YEAR
YY	11, 12, 13 ETC. EXAMPLE: YEAR 2013 = 13

WITH MODULE INSERTED. DIMENSION MAY BE LESS DUE TO MODULE AND HEATSINK VARIATIONS

REAR LEG OPTIONS (PER PORT)

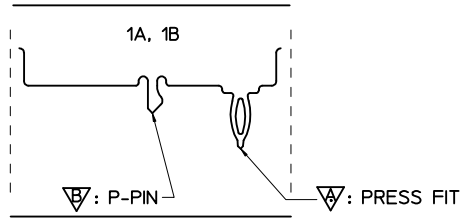

HEATSINK OPTIONS
CUSTOM FIN

APPLICATION	DIM 'A'
CUSTOM	23.6




SEE REVISION SHEET EIC NO: CPG2015-5742 DRAWN BY: JERWIN CHYD: GBARDELLA APPR: RCHEN08 2015/05/04 2015/08/26	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±0.13 ±--- 1 PLACE ±0.25 ±--- 0 PLACE ±--- ±--- ANGULAR ±--- DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY DRAWN BY: JERWIN DATE: 2013/11/21 CHECKED BY: GBARDELLA DATE: 2013/11/21 APPROVED BY: DATE:	SCALE: 3:1 DESIGN UNITS: METRIC THIRD ANGLE PROJECTION	TITLE: SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS molex	MATERIAL NO.: SEE SHEET 4 DOCUMENT NO.: SD-11112-2220 SHEET NO.: 2 OF 8
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
	SIZE D					
	SEE SHEET 4					

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

OPTIONAL GEN 2 zSFP+ UNDER BELLY GASKET

1001130220

SHOWN

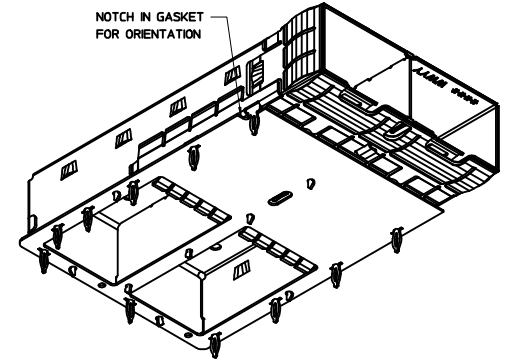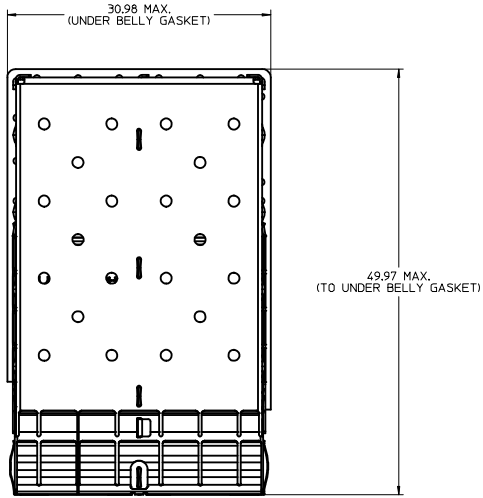


NOTE:
1. UNDER BELLY GASKET IS UL94 V-0 RATED.


SEE REVISION SHEET EEC NO: CPG2015-5742 DRAWN BY: JERWIN CHYK: 2015/05/04 APPR: RCHEN08 2015/08/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	∇=0 ∇=0 ∇=0	mm INCH	MM ONLY	3.5:1	METRIC	THIRD ANGLE PROJECTION
	4 PLACES ±--- 3 PLACES ±--- 2 PLACES ±0.13 1 PLACE ±0.25 0 PLACE ±---	4 PLACES ±--- 3 PLACES ±--- 2 PLACES ±0.13 1 PLACE ±0.25 0 PLACE ±---	DRAWN BY: JERWIN DATE: 2013/11/21 CHECKED BY: GBARDELLA DATE: 2013/11/21 APPROVED BY:	DATE:	DATE:	DATE:
	ANGULAR ±--- DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.: SEE SHEET 4	TITLE: SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS	DOCUMENT NO.: SD-111112-2220	SHEET NO.: 3 OF 8	

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1


PART NUMBER SELECTION




SFP+ CLOSED TOP BASE CAGE	
PART NO.	DESCRIPTION
747540220	SFP FOOTPRINT (STD B TO B), 5 WELD POINTS
747540222	SFP FOOTPRINT (STD B TO B), 16 WELD POINTS
747540247	SAME AS ABOVE BUT NO PN/DATE CODE PRINTED




zSFP+ GEN 2 CLOSED TOP	
PART NO.	DESCRIPTION
1001130220	



SFP+ OPEN TOP BASE CAGE FOR HEATSINK	
PART NO.	DESCRIPTION
1111120220	




SFP+ CUSTOM HEATSINK OPTION	
PART NO.	DESCRIPTION
1111120226	




SFP+ PIN FIELD HEATSINK OPTION	
PART NO.	APPLICATION
1111121220	PCI
1111122220	SAN
1111123220	NETWORKING


NOTE: PCI - 13 ROWS
SAN - 11 ROWS
NETWORKING - 10 ROWS



SFP+ LATERAL FIN HEATSINK OPTION	
PART NO.	APPLICATION
1111124220	PCI
1111125220	SAN
1111126220	NETWORKING





SFP+ LATERAL FIN HEATSINK OPTION	
PART NO.	APPLICATION
1111127220	PCI
1111128220	SAN
1111129220	NETWORKING



SFP+ CUSTOM FIN HEATSINK OPTION	
PART NO.	DESCRIPTION
1111126221	

SEE REVISION SHEET EC NO. CPC2015-5742 DRAWN:THSU CHKD: APPR:RCHEN08 2015/05/04 2015/08/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▽=0	mm INCH	MM ONLY	2:1	METRIC		
	▽=0	4 PLACES ±	DRAWN BY	DATE	TITLE		
	▽=0	3 PLACES ±	JERWIN	2013/11/21	SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS		
	2 PLACES ±0.13	CHECKED BY	DATE				
	1 PLACE ±0.25	GBARDELLA	2013/11/21				
	0 PLACE ±	APPROVED BY	DATE				
	ANGULAR ±	MATERIAL NO.	DOCUMENT NO.				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLES	SD-111112-2220			SHEET NO. 4 OF 8	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					


PCB LAYOUT - SINGLE SIDE ONLY

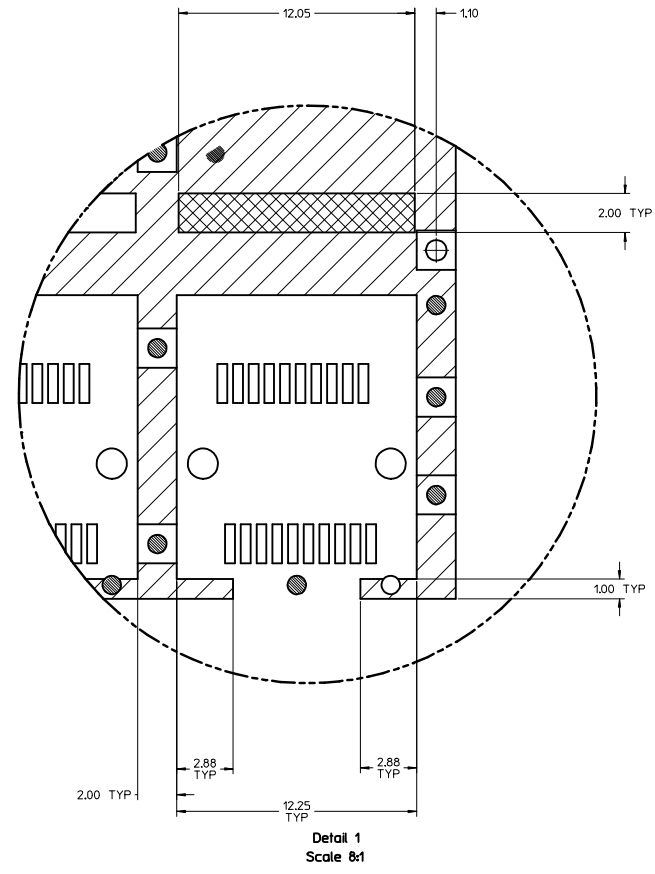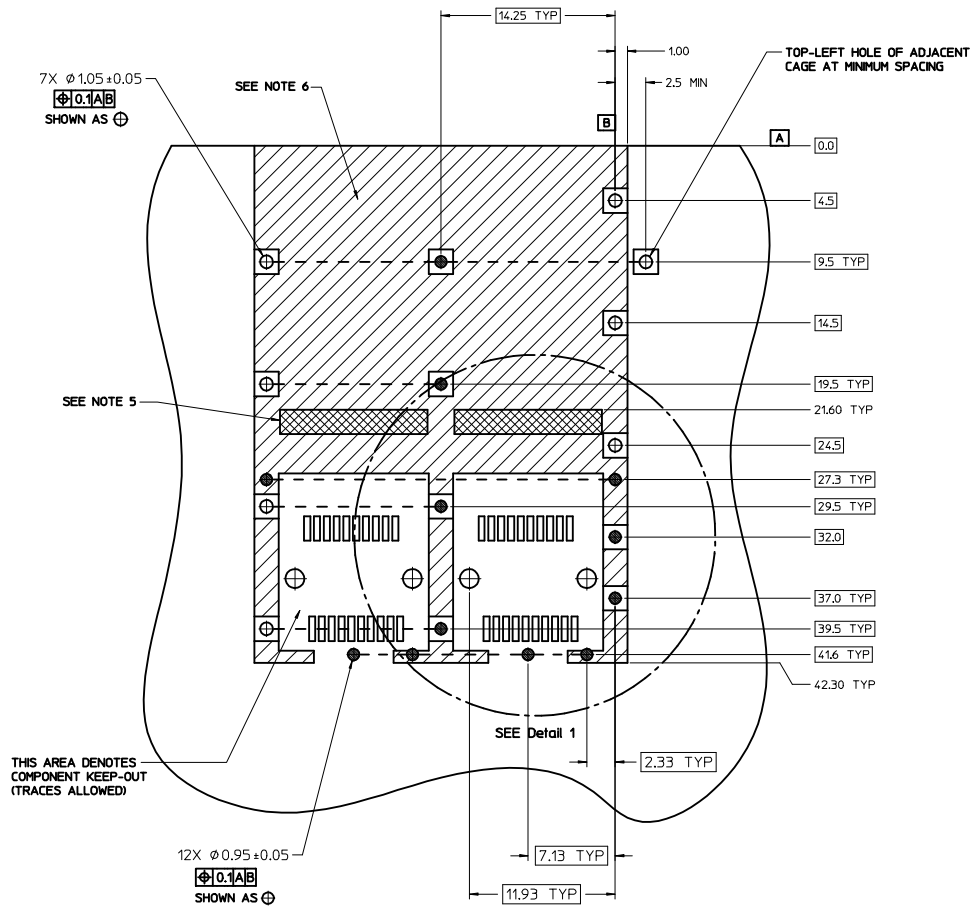

- NOTES:**
- PADS AND VIAS CONNECT TO CHASSIS GROUND
RECOMMEND PADS TO BE 2.00mm SQUARE
 - RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
 - CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT.
 - SPACING BETWEEN PORTS IS 14.25mm
 - CROSS-HATCHED AREA IS EXPOSED CHASSIS GROUND (NO OSP)
 - HATCHED AREA IS COMPONENT AND TRACE KEEP-OUT (EXCEPT CHASSIS GROUND)
 - 1.57mm (.062 INCH) MINIMUM PCB THICKNESS FOR SINGLE SIDED USE.

SEE REVISION SHEET IEC NO: CPG2015-5742 DRAWN BY: H CHYK: APPR: RCHEN08 DESCRIPTION: 2015/05/04 2015/08/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY	5:1	METRIC	⊕
	▽=0	4 PLACES ± --- ± ---	DRAWN BY: JERWIN	DATE: 2013/11/21	TITLE: SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS	
	▽=0	3 PLACES ± --- ± ---	CHECKED BY: GBARDELLA	DATE: 2013/11/21	APPROVED BY: DATE	
	ANGULAR ± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE SHEET 4	DOCUMENT NO. SD-11112-2220	SHEET NO. 5 OF 8	
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

PCB LAYOUT FOR BELLY TO BELLY MOUNTING

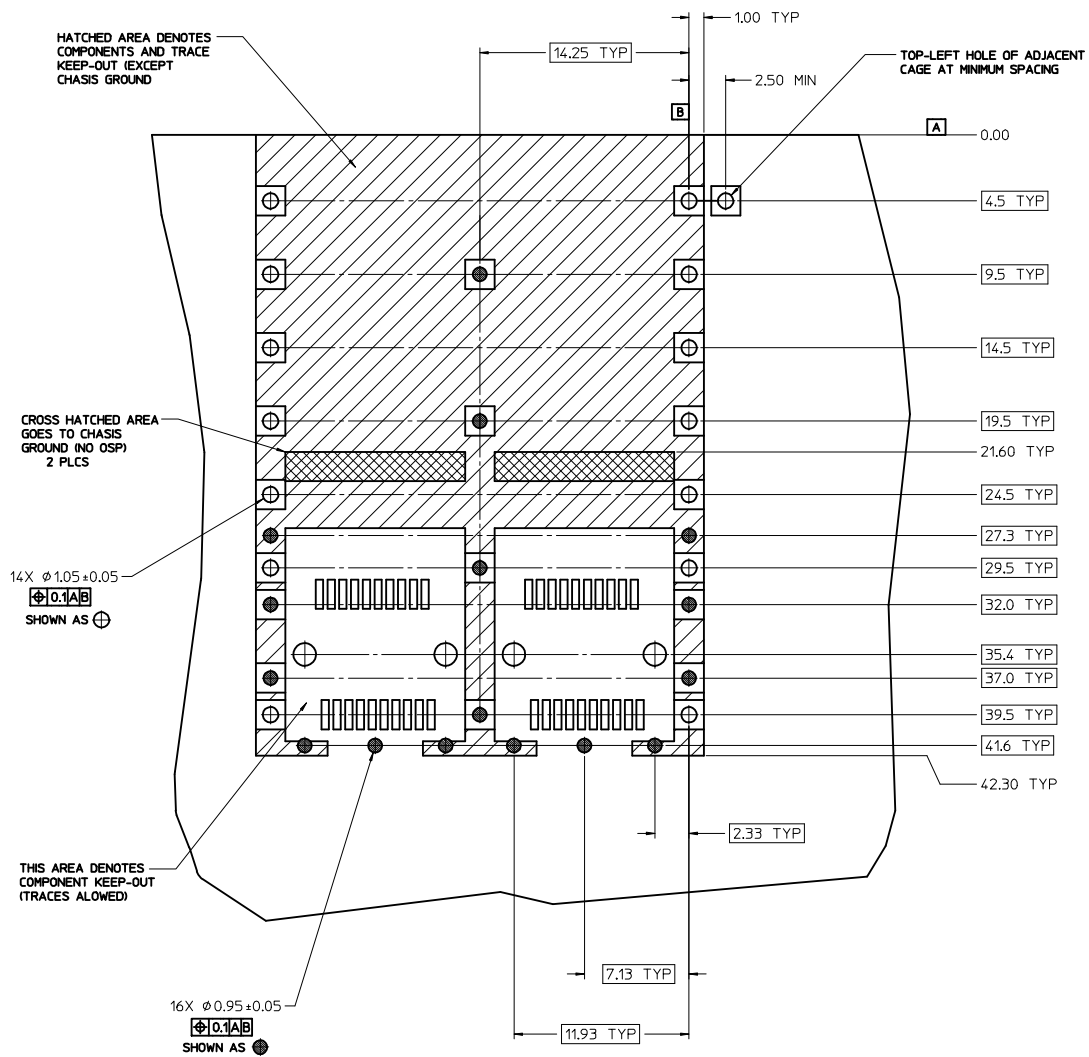


NOTE:
SEE SHEET 5 FOR HOST
CONNECTOR DETAIL


- NOTES:
- PADS AND VIAS CONNECT TO CHASSIS GROUND
RECOMMEND PADS TO BE 2.00mm SQUARE
 - RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
 - CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT.
 - SPACING BETWEEN PORTS IS 14.25mm
 - 3.00mm [1.18 INCH] MINIMUM PCB THICKNESS FOR BELLY TO BELLY USE.

SEE REVISION SHEET IEC NO: CPG2015-5742 DRAWN BY: H CHYK: APPR:RCHEN08 2015/05/04 2015/08/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	∇=0 ∇=0 ∇=0	mm INCH	MM ONLY	6:1	METRIC	☉ THIRD ANGLE □ PROJECTION
	4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±0.13 ±--- 1 PLACE ±0.25 ±--- 0 PLACE ±--- ±---	DRAWN BY: JERWIN DATE: 2013/11/21 CHECKED BY: GBARDELLA DATE: 2013/11/21 APPROVED BY:	MATERIAL NO. SEE SHEET 4	TITLE SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS	DOCUMENT NO. SD-111112-2220	SHEET NO. 6 OF 8
	ANGULAR ±--- DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING
(SPRING FINGER)

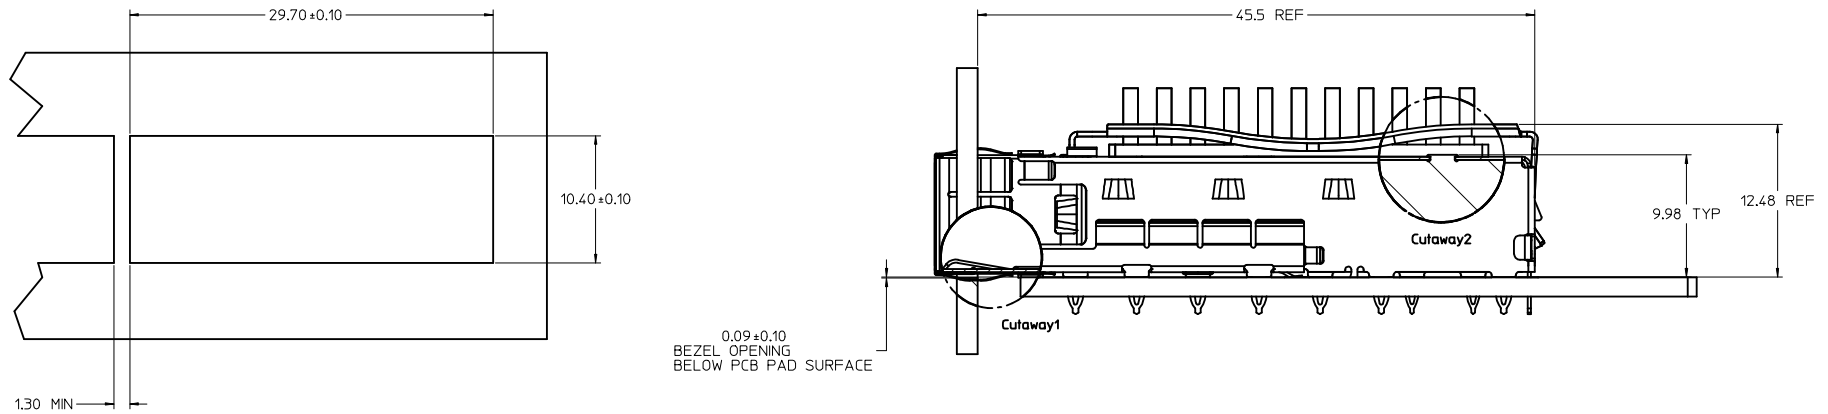


BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING
(SPRING FINGER)

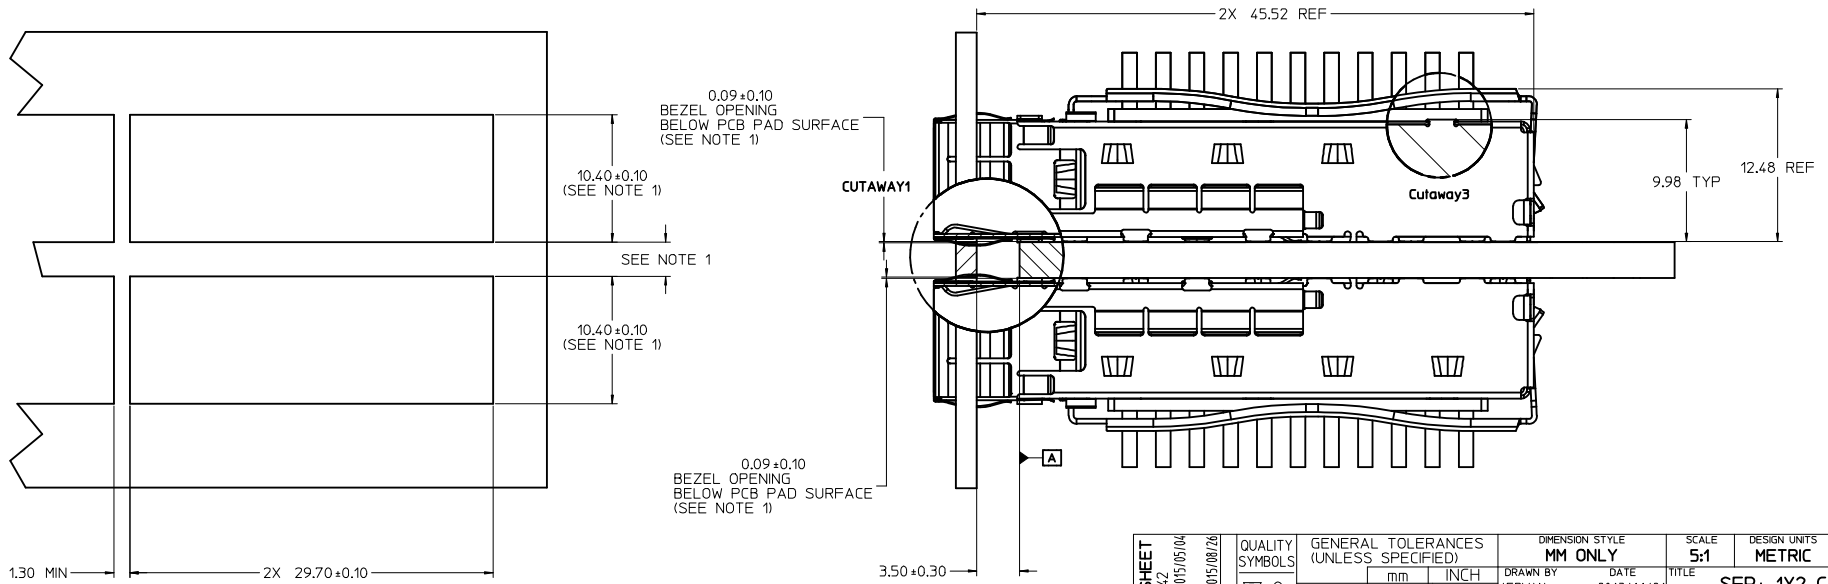

- NOTE:
- PCB THICKNESS VARIATION MUST BE CONSIDERED WHEN DETERMINING BEZEL OPENING SIZE AND LOCATION.
 - CAGE LEG STANDOFF WILL PIERCE BELLY GASKET WHEN PROPERLY PRESSED INTO PCB.

SEE REVISION SHEET IEC NO: CPG2015-5742 DRAWN BY: CHYK APPR: RCHEN08 2015/05/04 2015/08/26	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- 0 PLACE ± --- ± --- ANGULAR ± --- DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY SCALE 5:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	DRAWN BY: JERWIN DATE: 2013/11/21 CHECKED BY: GBARDELLA DATE: 2013/11/21 APPROVED BY: DATE:	TITLE SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS molex MATERIAL NO.: SEE SHEET 4 DOCUMENT NO.: SD-111112-2220	SHEET NO. 7 OF 8
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
	IEC NO: CPG2015-5742 DRAWN BY: CHYK APPR: RCHEN08 2015/05/04 2015/08/26					

DATE	REV	DESCRIPTION
2011/06/10	A	INITIAL RELEASE
2011/06/15	A1	SHEET 1: REMOVED HEATSINK OPENING REFERENCE DIMENSIONS AND WEEK 52 REFERENCE, SHEET 4: ADDED NOTES POINTING TO THE INNER WALL COINED OVER THE COVER.
2011/07/22	B	ADDED HOLES IN CAGE FOR LIGHTPIPES, MOVED DATE CODE, REVISED ROHS NOTE 5, CHANGED HEATSINK HEIGHT FROM 8.63 TO 6.5, TABULARIZED PCI, SAN, AND NETWORKING, AND ADDED HEATSINK HEIGHT WITH MODULE INSERTED.
2011/08/19	B1	UPDATED CAGE AND SPRING CLIP MODELS.
2012/10/25	C	SHEET 1: REMOVED HEATSINKS, AND ALL DIMS AND ANNOTATIONS RELATING TO THEM, FROM ALL VIEWS; REMOVED NOTE 6; REMOVED EXPLODED VIEW; REMOVED PART NUMBER TABLE; ADDED TITLE. NEW SHEET 2: ISO VIEWS OF CAGE WITH NO HEATSINKS AND VIEWS WITH EACH OF FOUR TYPES AND SIZES OF HEATSINK; ANNOTATIONS ON EACH VIEW INDICATING EACH HEATSINK TYPE AND SIZE, RIGHT SIDE VIEW WITH DIM OF HEATSINK HEIGHT; TABLE UNDER EACH VIEW WITH HEATSINK SIZES AND DIMS; NOTE 1; SHEET TITLE. NEW SHEET 3: ISO VIEWS OF CAGE WITH NO HEATSINKS AND VIEWS WITH EACH OF FOUR DIFFERENT TYPES OF HEATSINK; TABLES UNDER EACH VIEW WITH PART NUMBERS OF EACH SIZE; SHEET TITLE.
2014/02/07	D	SHEET 1: REVISED ALL BASE CAGE DETAILS AND VIEWS FROM 111112-0232 TO 74754-0220. REMOVED INSERTION FORCE INTO PCB FROM NOTE 2. REVISED NOTE 4: "WAS" WELD SPOT WILL SHOW SLIGHT MATERIAL DISCOLORATION. "NOW READS" WELD SPOT MAY SHOW SLIGHT MATERIAL DISCOLORATION. SHEET 2: REVISED ALL HEAT SINK CAGE ASSEMBLY OPTIONS, ADDED OPEN TOP VIEW WITH DIMENSIONS, AND REAR LEG OPTION VIEW. ADDED SHEET 3 WITH ZSFP+ OPTIONS SHEET 4: ADDED PART NUMBERS 747540220, 1001130220. UPDATED TITLE BLOCK.
2014/08/13	E	SHEET 1: ADDED "REF" TO DIM 10.85 AND 28.25. ADDED 14.0 ±0.1. MOVED "MINIMUM PCB THICKNESS" NOTES FROM SHEET 1 TO SHEETS 5 AND 6.
2014/08/21	F	SHEET 1: ADDED 747540247 NO NEED PRINTED @C6. SHEET 1: ADDED P/N AND DATE CODE PRINTED NOTE @D11. SHEET 4: ADDED P/N 747540247 IN TABLE @I18.
2015/02/26	G	SHEET 3: ADDED NOTE 1 "UNDER BELLY GASKET IS UL94 V-0 RATED." SHEET 4: ADDED "5 WELD POINTS" INTO 747540220 @I17. SHEET 4: ADDED P/N 747540222 @I17. SHEET 7: ADDED NOTE 2 "CAGE LEG STANDOFF WILL PIERCE BELLY GASKET WHEN PROPERLY PRESSED INTO PCB."
2015/08/26	H	SHEET 2: E3 : ADDED NEW CUSTOM FIN HEATSINK ISOVIEW SHEET 4: E3 : ADDED PART NO. 111112-6221 ISOVIEW MODIFIED PCB LAYOUT PER SFF-8433 SHEET 5: K19 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 D17 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 SHEET 6: G19 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 B18 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1

SEE REVISION SHEET IEC NO: CPG2015-5742 DRAWN BY: H CHYK: H APPR: RCHEN08 2015/05/04 2015/08/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY	2:1	METRIC	☉
	▽=0	4 PLACES ±--- ±---	DRAWN BY: JERWIN DATE: 2013/11/21	TITLE: SFP+ 1X2 CAGE, .120 INCH PRESS FIT, HEAT SINK, EMI SPRING FINGERS		
	▽=0	3 PLACES ±--- ±---	CHECKED BY: GBARDELLA DATE: 2013/11/21			
	2 PLACES ±0.13 ±---	1 PLACE ±0.25 ±---	APPROVED BY: DATE	MATERIAL NO.	DOCUMENT NO.	SHEET NO.
	0 PLACE ±--- ±---	ANGULAR ±---°		SEE SHEET 4	SD-11112-2220	8 OF 8
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			