

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	39014063	MiniFitJrPIg SR PnlMnt V-0 6 Ckt	2	PC
C	39000124	MiniFit Term Crp Male C Bs Tin 16awg	12	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B6	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	B5	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	B4	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	B3	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A5	B2	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A6	B1	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

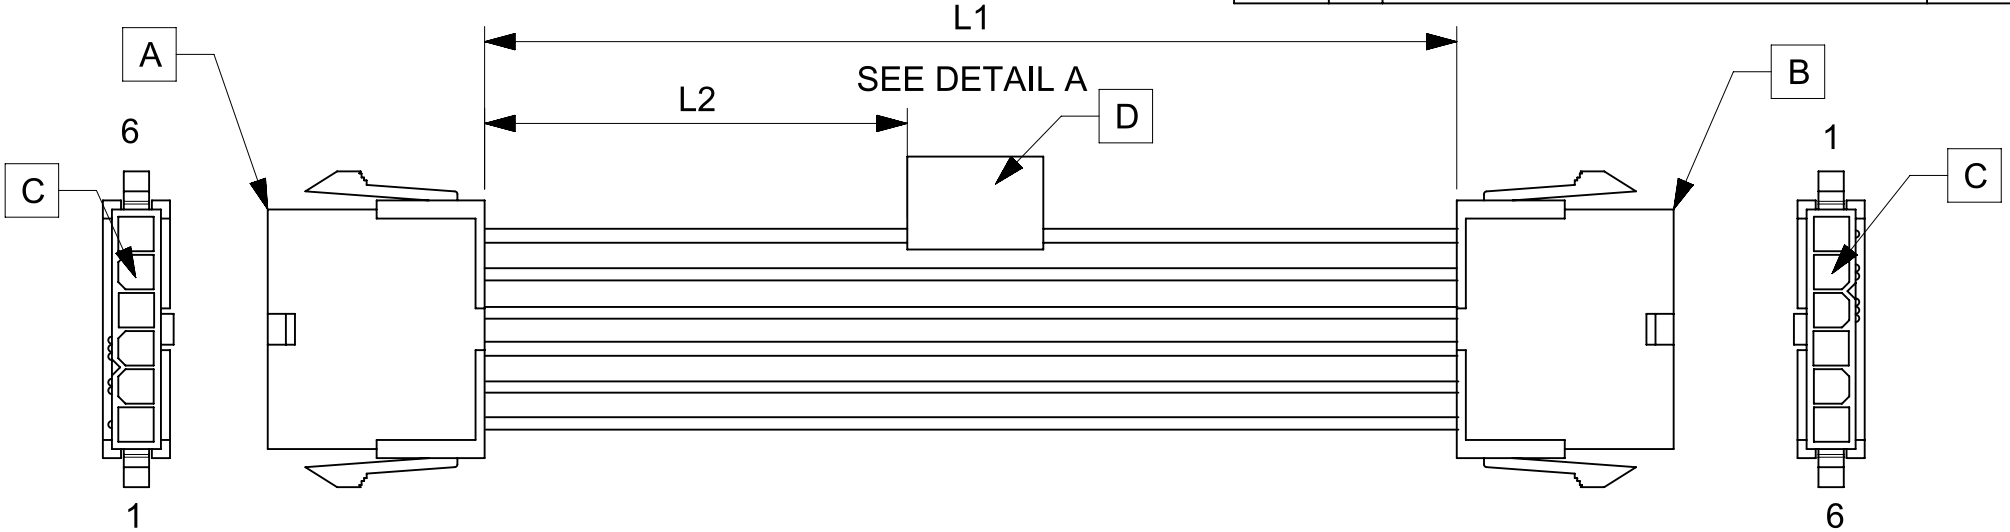


TABLE			
PART NUMBER	L1	L2	TITLE
2153221061	150±8	63 REF	MINIFIT JR SR M-M 6 CIRCUIT 150MM Sn
2153221062	300±10	138 REF	MINIFIT JR SR M-M 6 CIRCUIT 300MM Sn
2153221063	600±10	288 REF	MINIFIT JR SR M-M 6 CIRCUIT 600MM Sn

**NOTES**

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{V} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:				
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	mm	NTS	ANGULAR TOL ± °				
	4 PLACES ±		EC NO: 638380				
3 PLACES ±		DRWN: AS20 2020/04/06		SEE TABLE			
2 PLACES ±		CHK'D: RDESAI01 2020/05/28		PRODUCT CUSTOMER DRAWING			
1 PLACE ±		APPR: RDESAI01 2020/05/28		DOCUMENT NUMBER			
0 PLACES ±		INITIAL REVISION:		DOC TYPE DOC PART REVISION			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A4-SIZE	215322	2153221061	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2020/05/28	03:12:48
-----------------	----	--------------	------------	----------