






**FERROXCUBE**

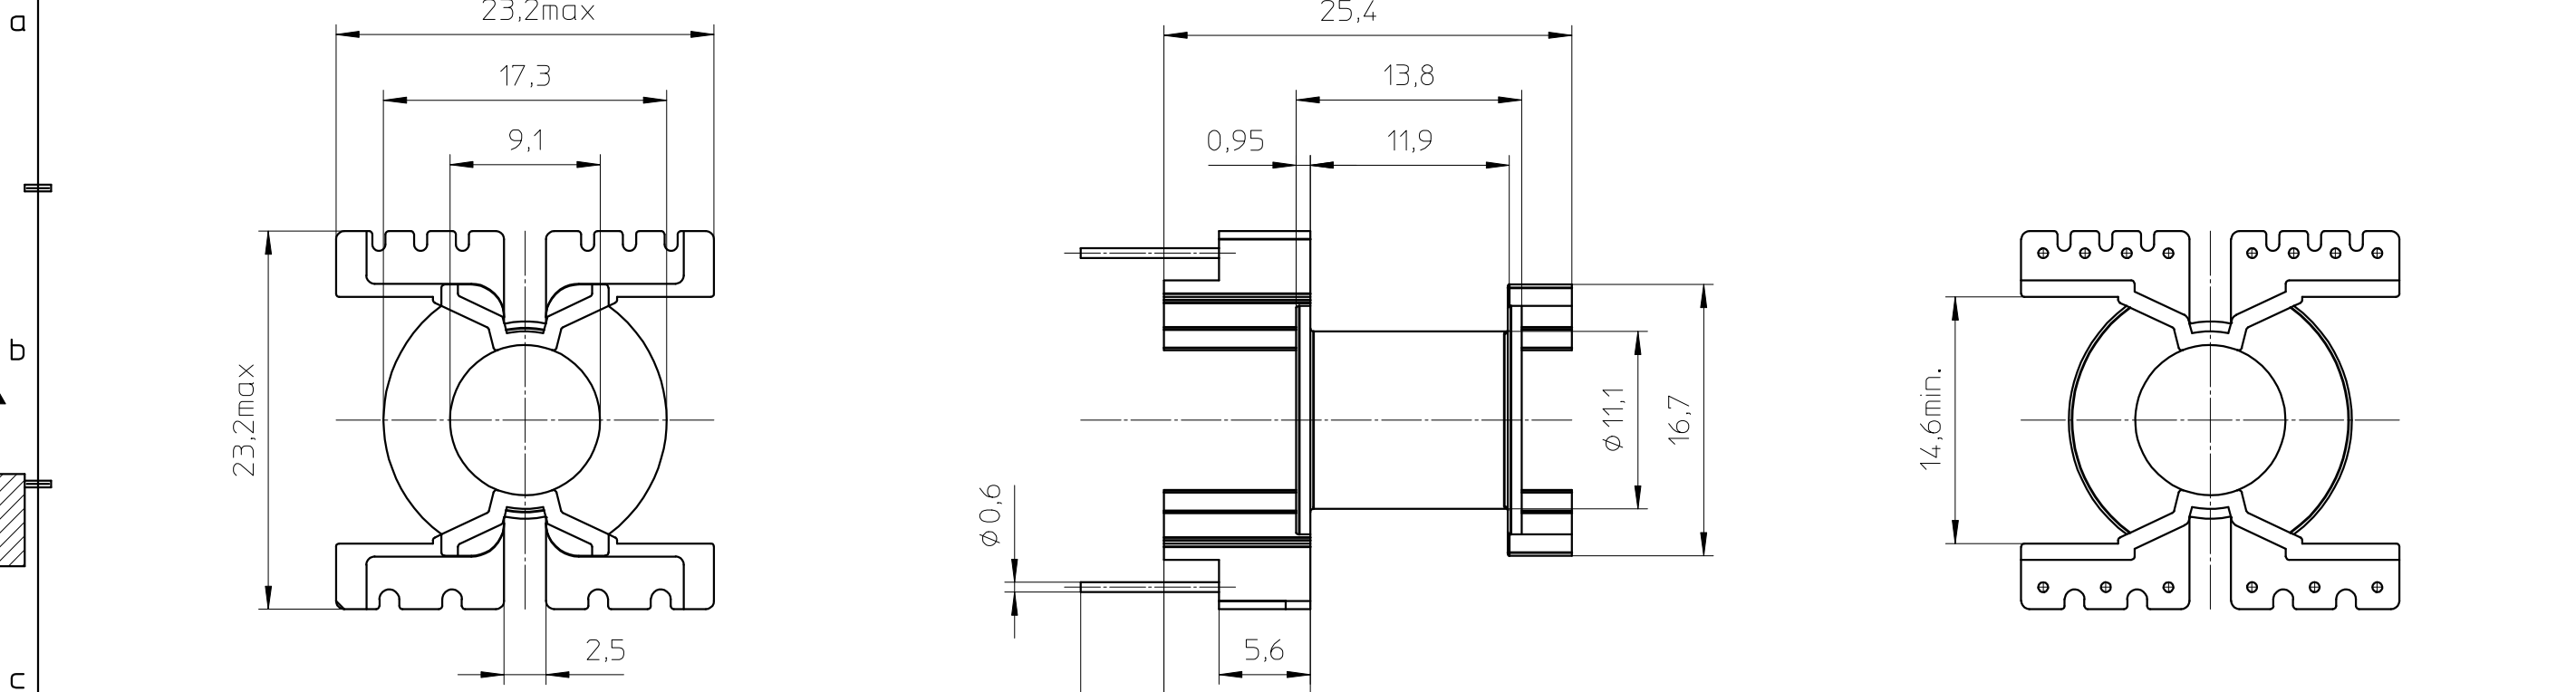


e



Proposal hole pattern:

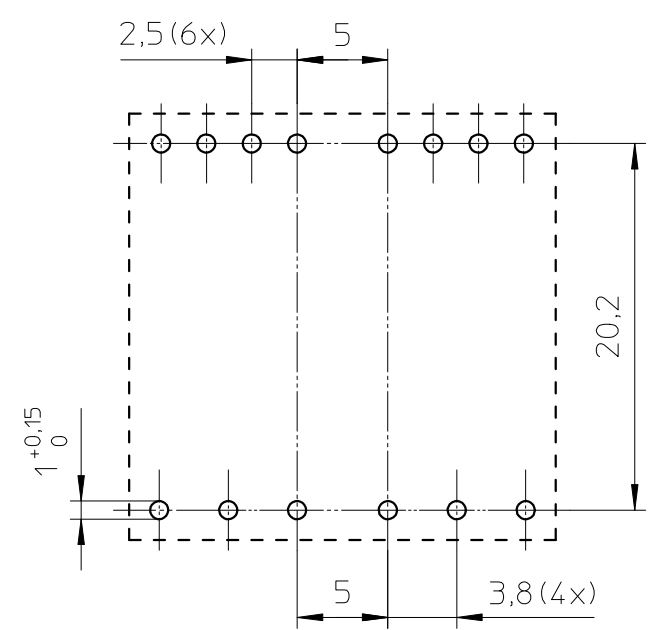

Coil former material: Sumikon PM9820 (PF), glass-reinforced.  
 UL file number: E41429(M) - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.  
 Min. winding area: 44 mm<sup>2</sup>.  
 Mean length of turn: 36 mm.



CLASS.NO.	CSV-PQ20/20-1S-14P		4322 021 03681	2001-04-04 2005-03-08
NAME NAAM	M.Veekens	SUPERS. VERV.	1 SH SH BL BL 112 - 001	A3
MPA	CHECK CONTR.	DAT.	2001-04-04	Property of Eigendom van © FERROXCUBE 2000