



.XX ±0.13 .XXX ±0.05



ISSUE NUMBER	
ORIGINAL	

(1)

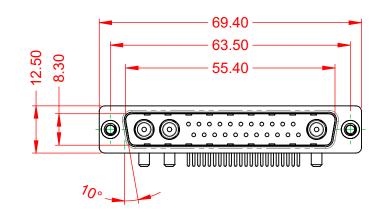




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

OPERATING TEMPERATURE:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



20A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

1000V AC rms



							SW REFERENCE NO.: 629 COMBO ASSEMBLY						
COMBIN	COMBINATION D-SUB				DRAWN: C.B			DATE: JAN. 01/2019					
					CHECKED:			DATE:					
EDAC	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE:	(IN C.A.D. 1:	1)	SHEET	1	OF	2				
			DRAWING NUMBER: 629-25W			3640-2NA			ISSUE				
YOUR CONNECTION TO QUALITY & S	ERVICE		PART NUM	/BER:	629-25W3	3640-2NA			1				

-55°C ~ 125°C



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



