



	ISSUE NUMBER
ORIGIN	IAL

(1)

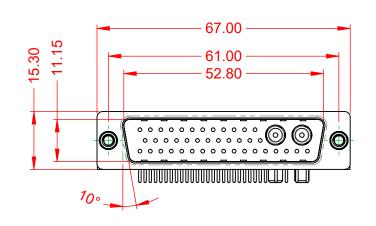




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	$5000M\Omega$ min.

.XX ±0.13 .XXX ±0.05



				SW REFERENCE NO.: 629 COMBO ASSEMBLY				
	COMBINATION D-SU		DRAWN: C.B		DATE: JAN. 01/2019			
			CHECKED:		DATE:			
	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D	. 1:1)	SHEET 1 O	= 2		
			DRAWING NUMBER: 629-43W2		2640-7N3	ISSUE		
YOUR CONNECTION TO	QUALITY & SERVICE		PART NUMBER:	629-43W	2640-7N3	1		

1000V AC rms





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

