


 G	TT .	m	D	O

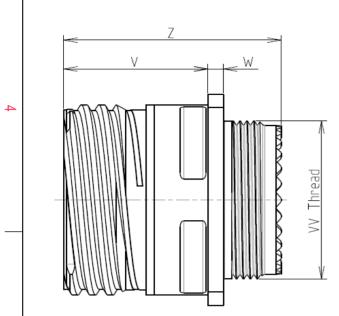

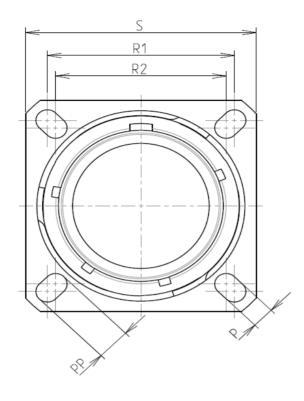



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : K = Passivated

Н

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Passivated			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 500 hours			

: 28.9 g ± 10%

8D 0

G

11

К

22

Ρ

F


Е

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

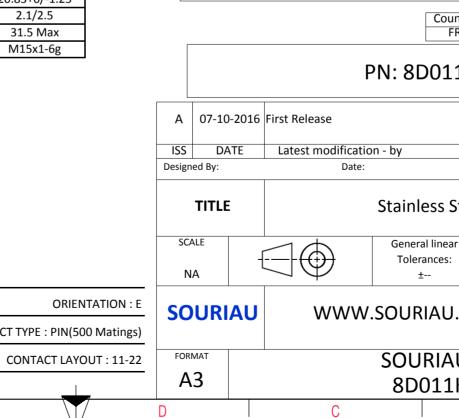

	Φ		A		
					4
AS EXA	AMPLE				3
s whic er of t ndatio untry FR	non-conformit ch does not co he Parties or t on, technical n Jurisc	mply with by a third part			2
	Ι			MOD N°	
Stee					
			59		1
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N°			SHEET	
.K2	2PE-C	1		1/2	J
	В		А		

4	(	Contact Layout 22*				SQUARE FLANG	Panel Cu EE RECEPTACLE (TYPE 0) AR MOUNTING R1 T T T T T T T T T T T T T
	Ctc	4#22D 11-22 X Y					
ω	A B C D	1.905       1.905         1.905       -1.905         -1.905       -1.905         -1.905       1.905					Dim ØA ØAA R1 ØT
	F						URIAU shall not be liable for due to a use of the Products pecifications issued by either (professional recommend
CA							PN: 8D01
					A ISS Designe		
_ <b>_</b>					SCA NA		Stainless S General linea Tolerances:
					FORM		WWW.SOURIAU
l	Н	G	F	E	D D		8D011 C
					V		

Т

ш

т

G

0

