





ISSUE NUMBER	
ORIGINAL	1

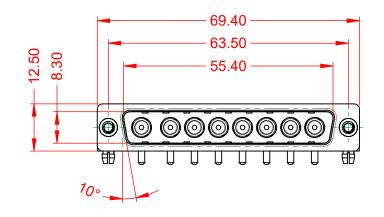




.XX ±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE:	$5000M\Omega$ min.

DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY					
			DRAWN: C.B		DATE: JAN. 01/2019		19	
			CHECKED:		DATE:			
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE	SCALE: (IN C.A.D. 1:1))	SHEET	1	ЭF	2
			DRAWING NUMBER: 629-8W8		640-1N3			ISSUE
YOUR CONNECTION TO		MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 6	629-8W8-	640-1N3			1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

