



IS	SUE NUMBER
ORIGINAL	-

(1)

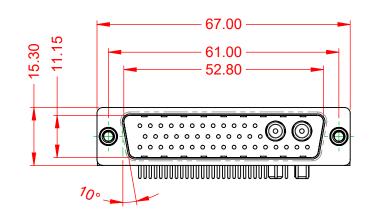




.XX ±0.13 .XXX ±0.05




MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	$50\Omega$ (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
	500010
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	



	COMBINATION D-SUB SW REFERENCE NO.:   DRAWN: C.B   CHECKED: CHECKED:		629 COMBO ASSEMBLY	
COMBINATION			DATE: JAN. 01/20	19
			DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-43W	2640-5T3	ISSUE
		PART NUMBER: 629-43W	2640-5T3	1

1000V AC rms



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

