т	D D	н п	m –	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite				
-Shell Plating	: Without Plating				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	: -65°C to +175°C				

: 2000 hours

: 12.9 g ± 10%

8D 0

G

11

Х

98


В


F

А

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

Е



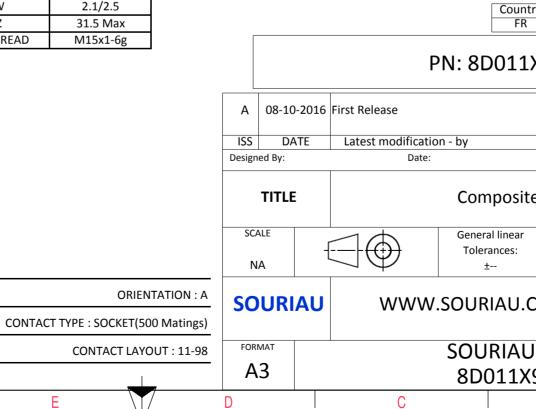

	σ			A			
							4
AS EXA	AMPLE						3
s which er of t indation untry FR	non-conformit ch does not co he Parties or to on, technical n Jurisd	mply wit by a thirc otice.)	th d party Control Li	st			2
					MOI	D N°	
CUSTOMER DRAWING							
ar :	NPRDS / PROJECT						
859 J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							1
					SHE	ET	
	8BA-C				1/	2	
	В			А			

	T	۵	וד	m	D	0
		Contact Layout				Panel Cutou
4	-×($ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & $			Λ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Cont positi ID A B C C D E E F Sheli Arrangement Numb	Jon (mm) X-axis (mm) Y-axis (mm) +.000 (0.00) +.130 (3.30) +.130 (3.30) +.000 (0.00) +.065 (1.65) 113 (2.87) 065 (1.65) 113 (2.87) 063 (3.30) +.000 (0.00) +.000 (0.00) +.000 (0.00)	1		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	Shell Arrangement Numbrick size no. conta 11 -98 6	acts contacts rating location				Dim
ယ						ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						Country FR
						PN: 8D011X
					A 08-10-7 ISS DAT Designed By:	2016 First Release E Latest modification - by Date:
					TITLE	Composite
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIA	WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D011X9
	Н	G	F	E	D	C

