

Ŧ	<u>م</u>	П	m	0



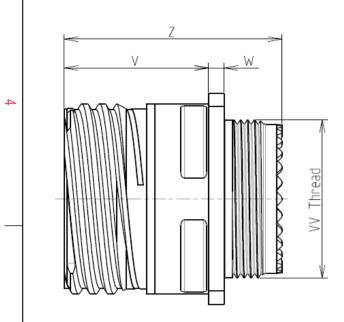

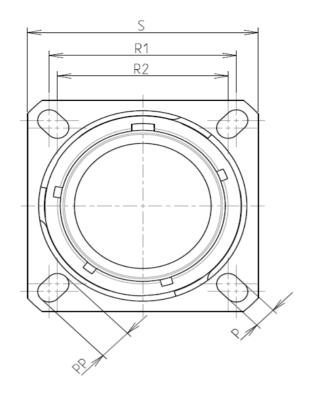

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium		
	-Shell Plating	: Olive drab Cadmium		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau contacts and Accessories			
	-Temperature Range	: -65°C to +175°C		
	-Salt Spray	: 500 hours		

: 37.81 g ± 10%

8D 0

G

17

W

06


S

F

Е

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

Е

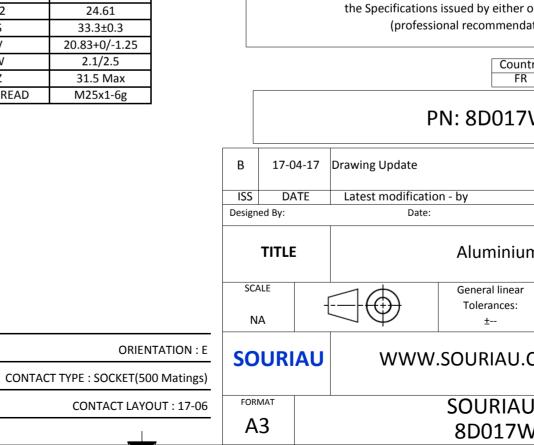

D

0		Φ		A			
			5			4	
LAYOUT SHOWN AS EXAMPLE							
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						2	
PN: 8D017W06SE							
Latest modification - by MOD N°							
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series							
$\neg \bigcirc$	General linear Tolerances:	NPRDS / PROJECT <b>859</b>					
WWW.SOURIAU.COM     This document is the property of SOURIAU it must not be reproduced or communicated without permission						1	
SOURIAU DRG N° 8D017W06SE-C					SHEET		
С		B		A		J	

