


REV. 1  
DCO 16356

COIL: @ 25°C  
RESISTANCE 540 - 770 OHMS  
NOMINAL VOLTAGE 26.5 VDC  
MUST OPERATE 13.0 VDC  
MUST RELEASE 10.1 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:  
VIBRATION 10 CPS TO 2000 CPS @ 15 g's  
SHOCK 100 g's 6 ± 1 MS. DURATION  
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 6 MS MAX.  
CONTACT BOUNCE 1 MS MAX.

CUSTOMER DATA SHEET

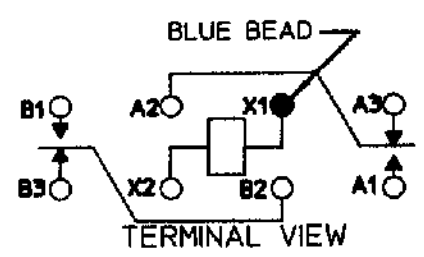

CONTACT RATING: 2A 28 VDC RESISTIVE 100,000  
OPERATIONS MINIMUM

DR. PBB 5-5-00 CK. TLG 7-12-00



CUST. QPL  
CUST. NO. M5757/10-054 REV. \_\_\_\_\_

\*FW\* RELAY

FW1201G03