
TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.







(1)

ORIGINAL

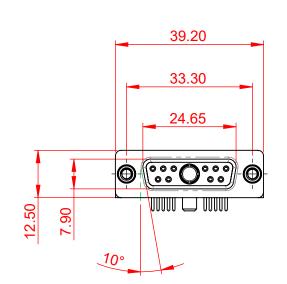





NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05

MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \m$

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm


	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-11W	1650-4T6	ISSUE
			PART NUMBER: 630-11W	1650-4T6	1



COMPLIANT





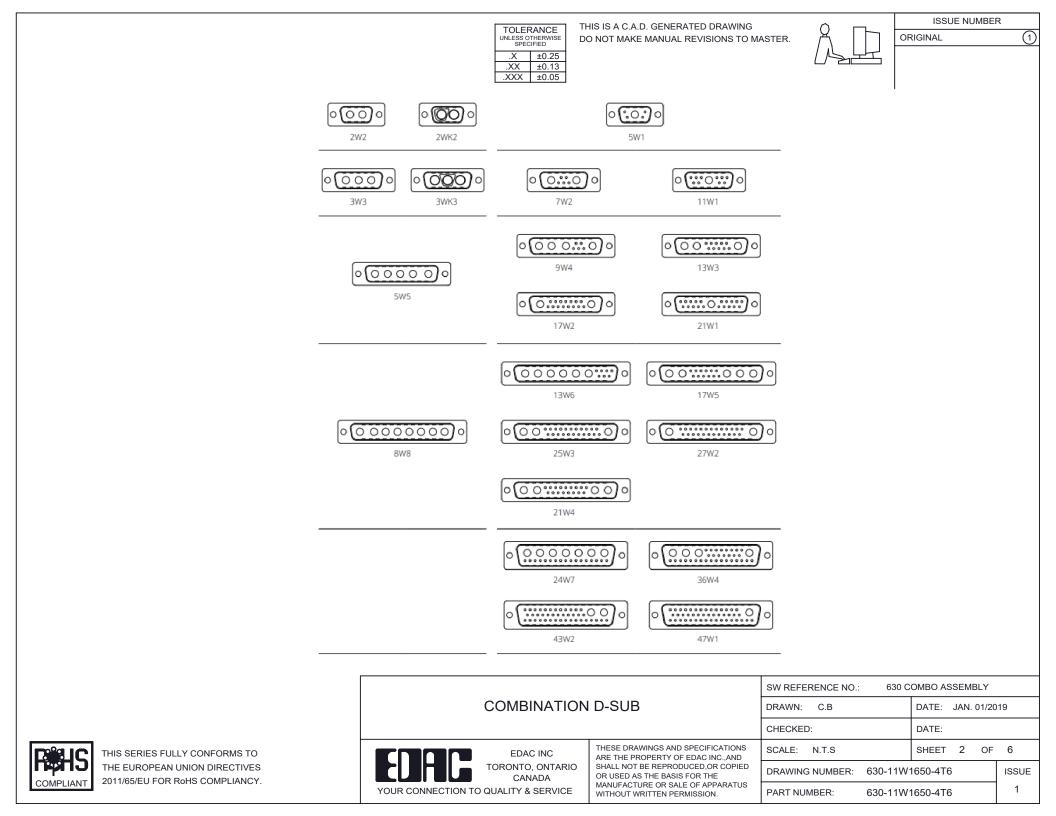



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male



PCB EDGE


8W8 Male



PCB EDGE



PCB EDGE



27W2 Male/Female


21W4 Male/Female

PCB EDGE

22.70


5W5 Female


COMPLIANT



8W8 Female








21W1 Male/Female



630 COMBO ASSEMBLY SW REFERENCE NO. COMBINATION D-SUB C.B DATE: JAN. 01/2019 DRAWN: CHECKED: DATE: THESE DRAWINGS AND SPECIFICATIONS SHEET 3 OF 4 SCALE: N.T.S EDAC INC ARE THE PROPERTY OF EDAC INC..AND NTO, ONTARIO SHALL NOT BE REPRODUCED, OR COPIED 630-11W1650-4T6 DRAWING NUMBER: ISSUE OR USED AS THE BASIS FOR THE CANADA MANUFACTURE OR SALE OF APPARATUS 1 **TY & SERVICE** PART NUMBER: 630-11W1650-4T6 WITHOUT WRITTEN PERMISSION.

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



17W2 Male/Female

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES

2011/65/EU FOR RoHS COMPLIANCY.

FN	A	F	E
YOUR CON	INECT	ION TO	QUALIT

11W1 Male/Female


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

















13W3 Male





25W3 Male






PCB EDGE


PCB EDGE

24.77

36W4 Female

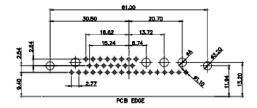

13W6 Male

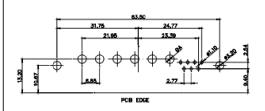



30.50

2.77

22.16

20.76

13.72

PCB EDGE

13W6 Female

13W3 Female

.X ±0.25 .XX

±0.13 .XXX ±0.05

9W4 Female

43W2 Female





17W5 Male








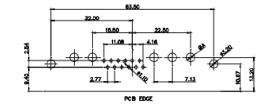

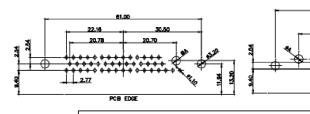

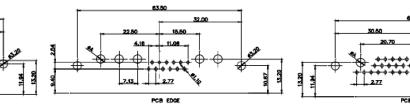

31.75

22.1 PCB EDGE

R#HS	
COMPLIANT	

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMBINATION D-SUB				
YOUR CONNECTION TO	EDAC INC TORONTO, ONTARIO CANADA) QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		

SW REFERENCE NO.: 630 COMBO ASSEMBLY			
DRAWN: C.B	DATE: JAN. 01/2019		
CHECKED:	DATE:		
SCALE: N.T.S	SHEET 4 OF 4		
DRAWING NUMBER: 630-11W1650-4T6 ISSU			
PART NUMBER: 630-11	W1650-4T6 1		