




SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

( ) = MOMENTARY

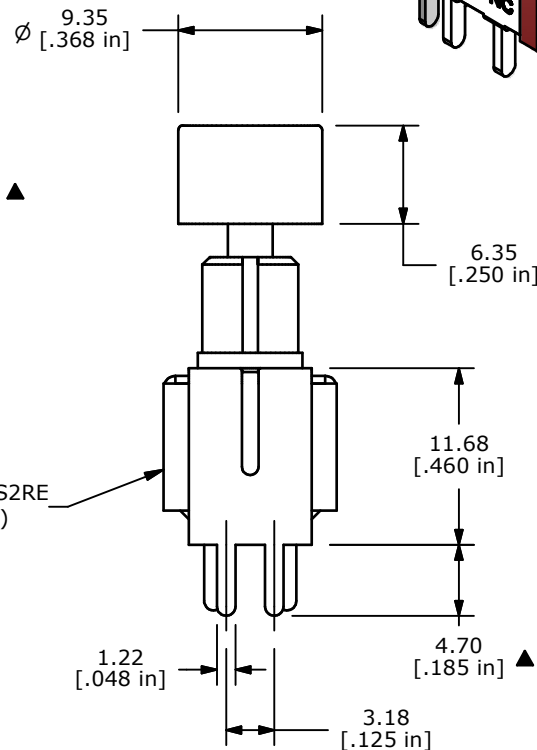

TRAVEL 1.00 [.039 in]

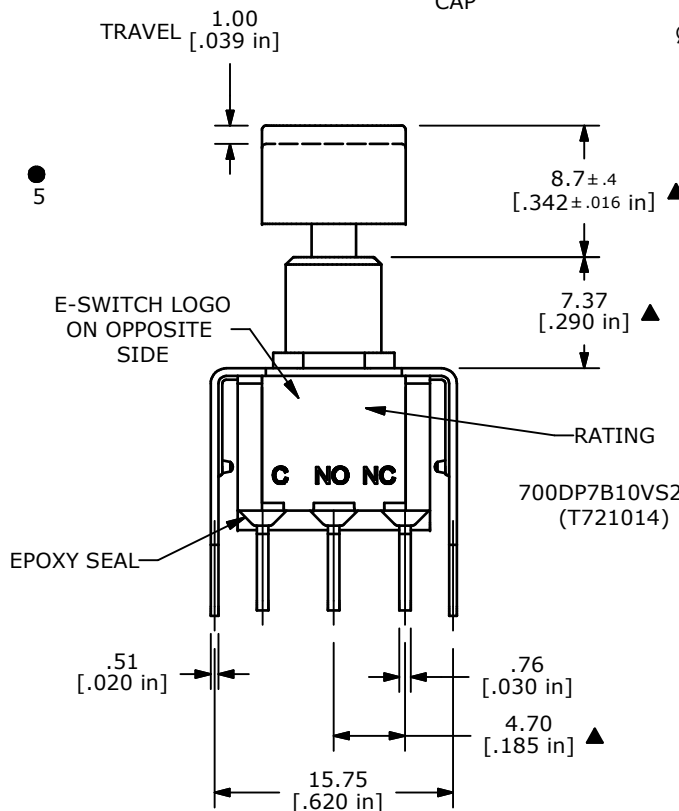

- NOTES;
- DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: x.x= 0.4  
x.xx= 0.25
  - TERMINAL NUMBERS FOR REFERENCE ONLY
  - PLATING MATERIAL: GOLD
  - ▲ RATING: 0.4VA MAX. @ 20V (AC or DC) MAX.
  - MECHANICAL LIFE: >50,000 CYCLES
  - CONTACT RESISTANCE: 20 MILLI-OHMS MAX.
  - INSULATION RESISTANCE: 1000M OHMS MIN.
  - DIELECTRIC STRENGTH: 1,000V RMS @ sea level
  - OPERATING TEMPERATURE: -30°C to 85°C
  - ▲ DENOTES CRITICAL PARAMETER
  - 2002/95/EC (ROHS) COMPLIANT



A	18319	RELEASE FOR PRODUCTION	11/14/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 700DP7B20VS2REC2BLK				
SCALE 2:1	DATE 11/14/2008	DR BLR	DWG XT0148P	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED