



**MODEL:** RC-1206S-1  
**PRODUCT:** Dynamic Receiver  
**EDITION:** A/2016

Soberton Inc.

---

## THIS SPECIFICATION COVERS OUR PRODUCT OF DYNAMIC RECEIVER UNIT FOR MOBILE TELEPHONE USE

---

### RECEIVER ELECTROACOUSTIC CHARACTERISTICS

test set up	Measuring conditions and procedures shown in Fig.1
ac impedance	$32 \pm 15\% \Omega$ (@1KHz 1V) without baffle
sound pressure level	$110 \pm 3\text{dB SPL}$ @1.0KHz Sine Wave 179mV with IEC318(0dB SPL= $20\mu\text{Pa}$ )
measuring condition	1mW (Sine wave) with baffle shown in Fig. 2
frequency response curve	As shown in Fig. 2
rated noise power	10mW, normal at a white noise (10mW, 200-3.4KHz) for one minute
short term max power	20mW
operation test	Must be free of audible noise (buzzes and rattles) (200 ~3.4KHz frequency range, input level up to 0.56Vrms)
distortion	Less than 10% @1KHz 179mV
dimension	12 x 6 x 5 mm

### GENERAL SPECIFICATIONS

operating temperature range	$-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
standard test conditions	
temperature	$17^{\circ}\text{C} \sim 25^{\circ}\text{C}$
relative humidity	45%~80%(RH)

### RELIABILITY TESTS

The sound pressure as specified shall neither deviate more than  $\pm 3\text{dB}$  from the initial value, nor have any significant damage after any of following testing.

#### HIGH TEMPERATURE TEST

high temperature	$+60 \pm 2^{\circ}\text{C}$
duration	96 hours

#### LOW TEMPERATURE TEST

low temperature	$-20 \pm 2^{\circ}\text{C}$
duration	96 hours

#### HEAT SHOCK TEST

high temperature	$+60 \pm 2^{\circ}\text{C}$
low temperature	$-20 \pm 2^{\circ}\text{C}$
changeover time	<30 seconds
duration	1 hour
cycle	100

#### HUMIDITY TEST

temperature	$+40 \pm 2^{\circ}\text{C}$
relative humidity	90%~95%
duration	96 hours



**MODEL:** RC-1206S-1  
**PRODUCT:** Dynamic Receiver  
**EDITION:** A/2016

**RELIABILITY TESTS** (Continued)

**TEMPERATURE CYCLE TEST**

temperature	-20°C	+60°C
duration	45minutes	45minutes
temperature gradient	1~3°C/min	
cycle	25	

**DROP TEST**

mounted with dummy set mass	100 g
height	1.5 m
cycle	6(1 each plain) Onto the concrete board

**LOAD TEST**

Speaker mode	white noise(EIA filter)for 96 hour@10mW input power
--------------	---

**MEASURING METHOD (SPEAKER MODE)**

**STANDARD**


**TEST CONDITION**

temperature	15 ~ 35°C
relative humidity	45% ~ 85%
atmospheric pressure	860mbar to 1060mbar

**STANDARD TEST FIXTURE**

input power	179mW
zero level	-dB
mode	TSR
potentiometer range	50dB
sweep time	0.2sec

**MEASURING CONDITIONS** (Fig. 1)

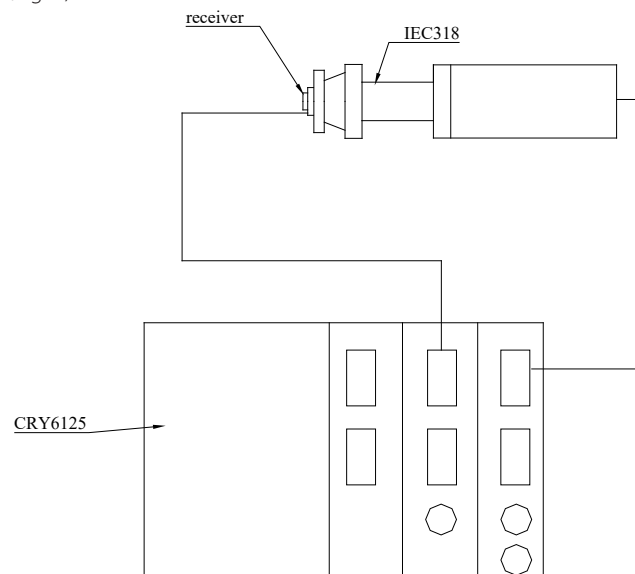




**MODEL:** RC-1206S-1  
**PRODUCT:** Dynamic Receiver  
**EDITION:** A/2016

Soberton Inc.

**FREQUENCY RESPONSE CURVE** (Fig. 2)

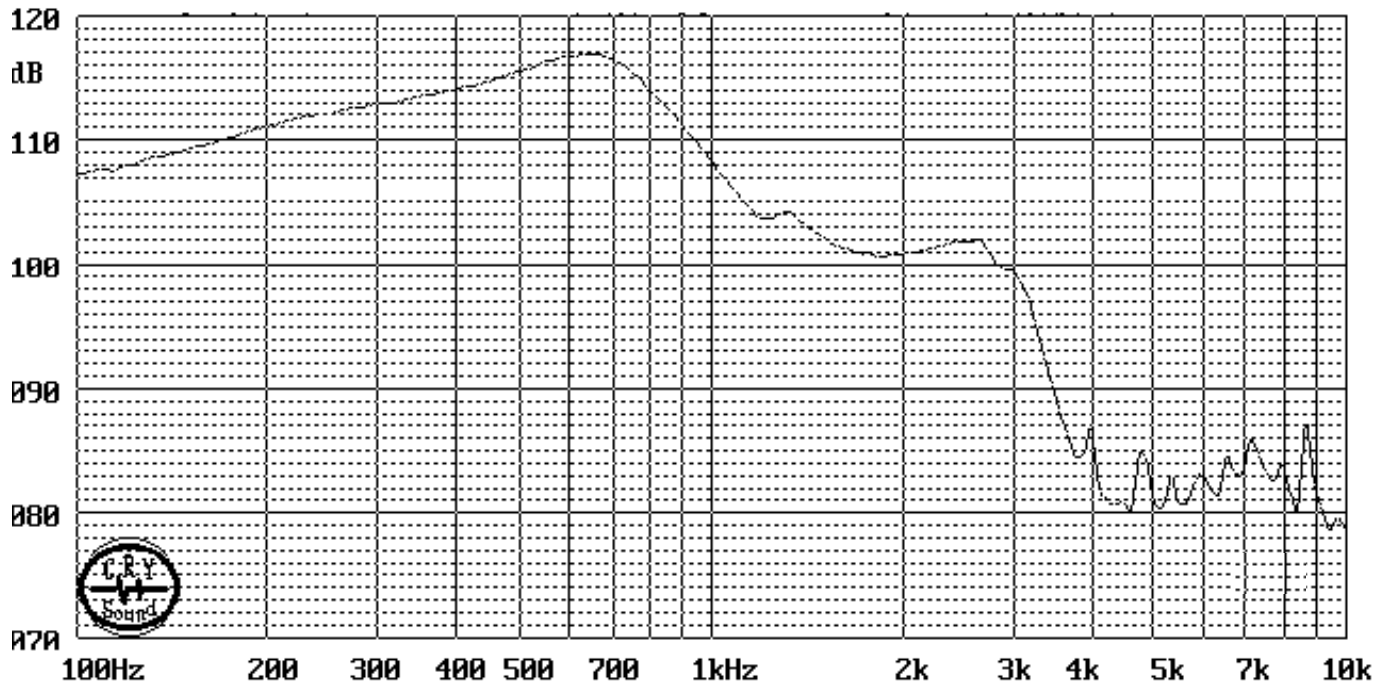




**MODEL:** RC-1206S-1  
**PRODUCT:** Dynamic Receiver  
**EDITION:** A/2016

**DIMENSIONS**

Tolerance: ±0.5 (unit: mm)

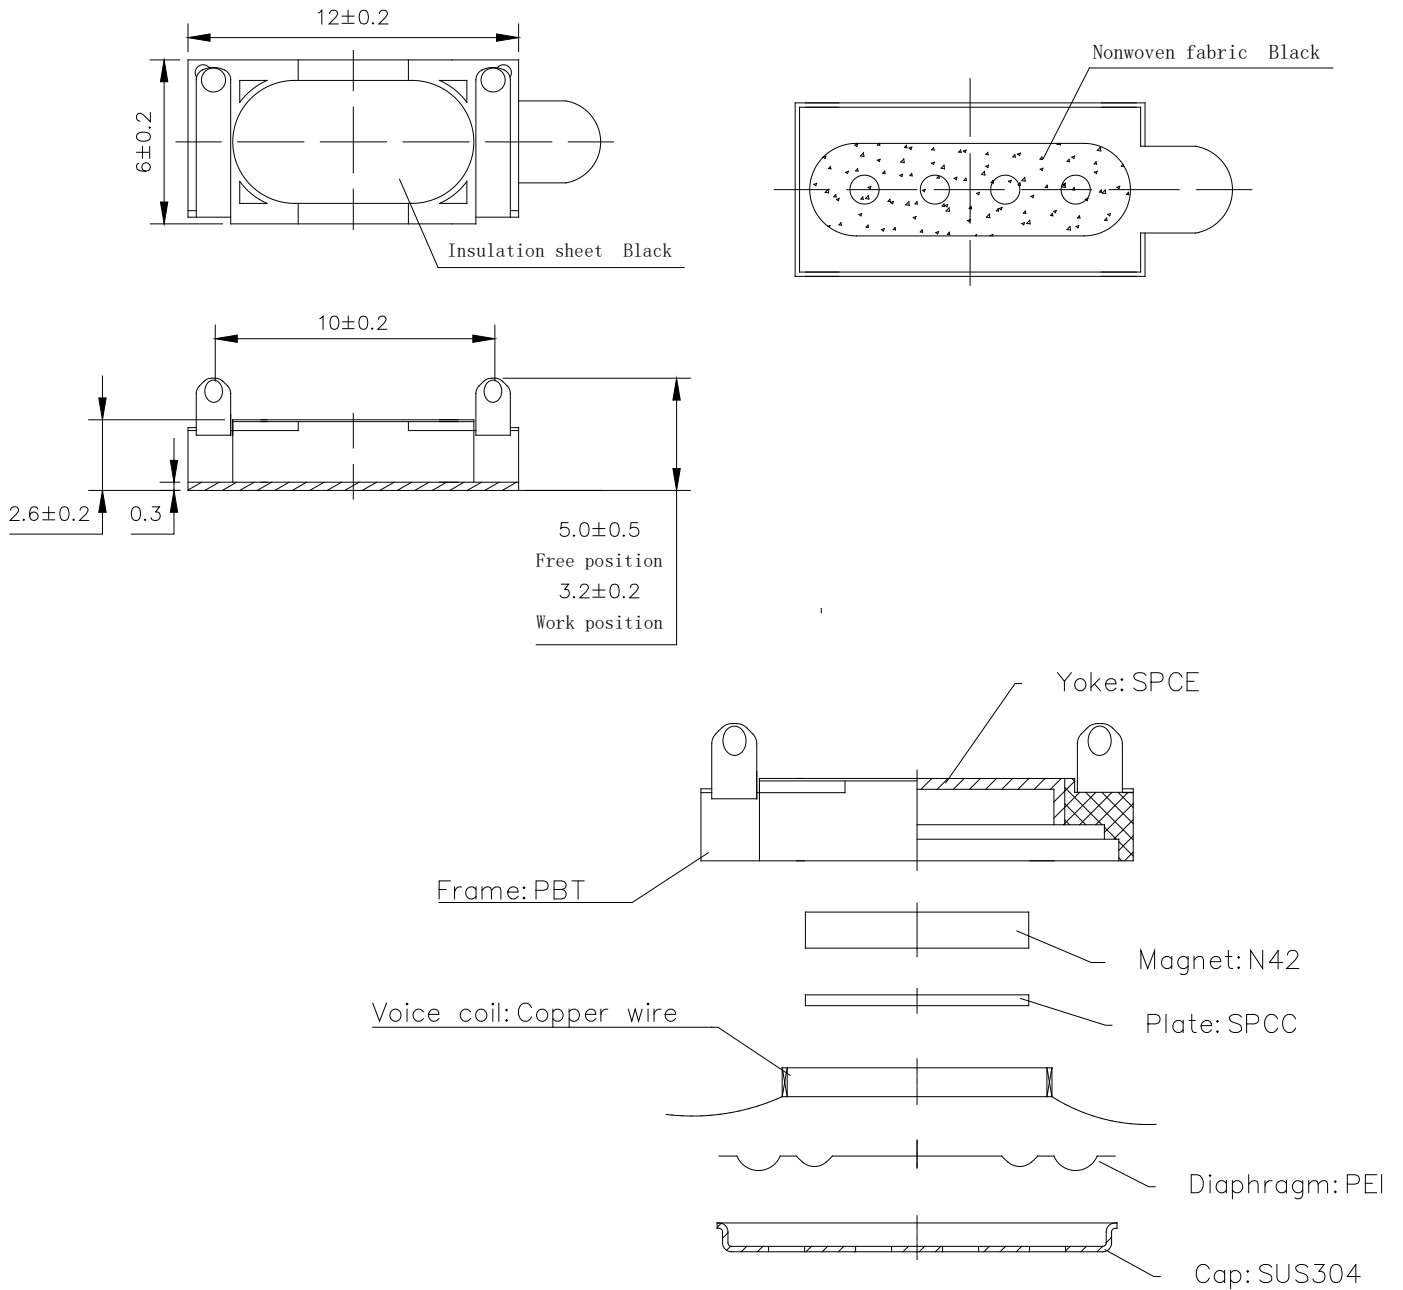

no	item	material	quantity
1	Cap	SUS 304	1
2	Diaphragm	PEI	1
3	Voice Coil	Copper wire	1
4	Plate	SPCC	1
5	Magnet	Nd Fe B	1
6	Frame	PBT	1
7	Yoke	Spce	1



**MODEL:** RC-1206S-1  
**PRODUCT:** Dynamic Receiver  
**EDITION:** A/2016

Soberton Inc.

## PACKING

