


1. Wiring Diagram.

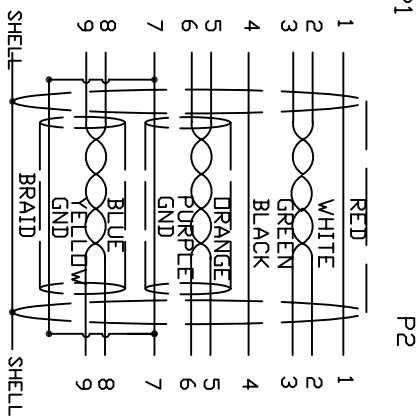

2. Cable test condition :
 Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

6	CORE	RH14.2*28.5*6.35mm	2		
5	CONN	USB3.0 B MALE G/F BLUE	1	P2	
4	PVC	45P PVC BLACK OVERMOLD	25g		
3	PE	LLDPE 500026 6201	1kg		
2	CONN	USB3.0 A/M G/F BLUE	1	P1	
1	CABLE	《28AWG (7/0.12TC) *IP+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *IP+24AWG(7/0.2TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	1000mm	
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	

A		INITIAL RELEASE		2014/08/28	
REVISION#		DESCRIPTION		DATE	
Cnc Tech, LLC			P/N:	103-1030-BL-F0100	REV A
DRAWN: WENG			DATE:	08/24/14	
CHECKED: EDWIN			DATE:	08/24/14	
APPROVAL:			CUSTOMER P/N:		
			CUSTOMER:		
			TITLE:	CABLE USB3.0 A/M TO B/M WITH FERRITES 1M	
			SHEET	1 OF 1	

