


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

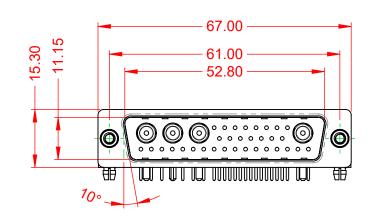




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

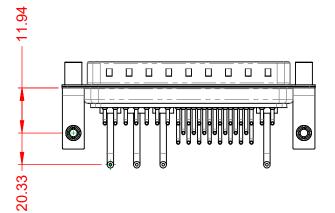

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

OPERATING TEMPERATURE:


WITHSTANDING VOLTAGE:

.X ±0.25 .XX ±0.13 .XXX ±0.05

10A (CURRENT) POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC

1000V AC rms

-55°C ~ 125°C

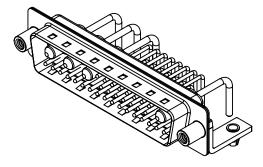

			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
s Y.	ARE THE PROPERTY OF EDAC INC. AND TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-36W4650-1N5		ISSUE
		PART NUMBER: 629-36W	4650-1N5	1	

