

-		 	_	
_	دی	 111	0	0



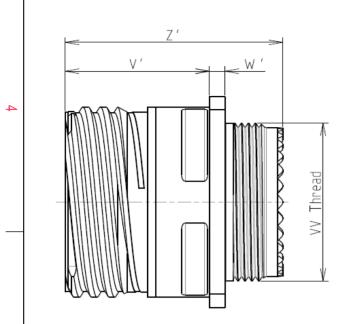

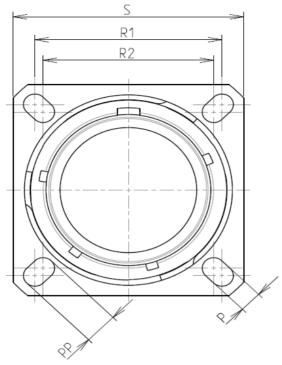

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

/							
	-Shell Material	: Composite	┢				
	-Shell Plating	: Nickel	┢				
	-Insulator	: Thermoplastic	E				
	-Contacts	: Copper Alloy	┝				
	-Seals & Grommet	: Silicon Elastomer	┢				
N	-Contact Plating	: Gold over copper Alloy 0.8μm minimum	Ľ				
	-Durability	: 500 Mating cycles	L				
	-Delivered with Souriau contacts and Accessories						
	-Temperature Range	: -65°C to +200°C					
	-Salt Spray	: 2000 hours					
	-Mass	: 17.5 g ± 10%					

8D 0

G

-


13 M

04

F

S E

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
V THREAD	M18x1-6g

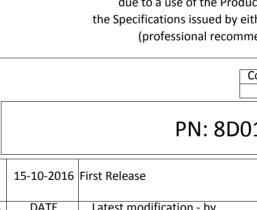

COLIDIALI		14/14/1	۸/ C		
N	A	l	$\neg \Psi$		±
SCA	ALE .	-	$ \square $		General linear Tolerances:
TITLE				Composite	
Designed By:			Dat	te:	
ISS	DA	TE	Latest modifica	ation	- by

т	D		0		σ		A	
								4
			ΙA	YOUT SHOWN AS	EXAMPLE			3
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 23.01 R2 20.62 S 28.6±0.3 V' 19.5+1.4/-0 W' 2.1/3.65			due to a use the Specifications	not be liable for an of the Products w s issued by either of ional recommenda	which does not co of the Parties or ation, technical r	omply with by a third party notice.) diction & Control List		
Z' 32 Max HREAD M18x1-6g	FR Not Listed 2 PN: 8D013M04SE 2							
	A 15	-10-2016	First Release					
	ISS Designed B	DATE	Latest modificatio			CUSTOMER DRAW	MOD N°	
	ТІТ	TITLE Composite Receptacle 8D series						
	SCALE	-		General linear Tolerances: ±		NPRDS / PROJEC 859	CT	1
ORIENTATIO CONTACT TYPE : SOCKET(500 Ma		URIAU WWW.SOURIAU.COM This document is the propusor SOURIAU it must not be reproduce communicated without per			IAU eproduced or			
CONTACT LAYOUT :	13-04 FORMAT A3			SOURIAL			SHEET	
E			С		104SE-C B		A 1/2]
L	U	I	U	I	D	I	Π	

r	т	۵	н т	m		0	
		Contact Layout				Ρ	anel Cutou
4		$X \begin{pmatrix} & & & \\ & & $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Conti positio A B C D Shell Arrangement N size no. 13 -4	n ID (mm) (mm) +.000 (0.00) +.150 (3.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)			~ -		ØT_
ω						Dim ØA ØAA R1 ØT	
	1						
						SOURIAU shall not be lia due to a use of the Pi the Specifications issued b (professional reco	roducts whi by either of ommendati
N						PN: 8	Country FR D013N
_					A 15-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:	
					TITLE		mposite
<u> </u>					SCALE NA		eral linear erances: ±
					SOURIA	U WWW.SOU	RIAU.C
					FORMAT A3		JRIAU 013M
-	Н	G	F	E	D	C	

