

Ŧ	<u>م</u>	П	m	0



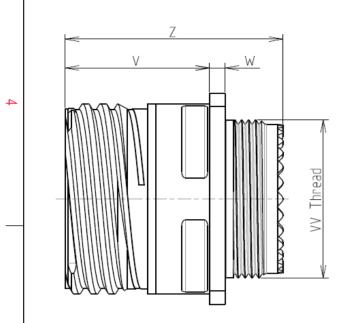

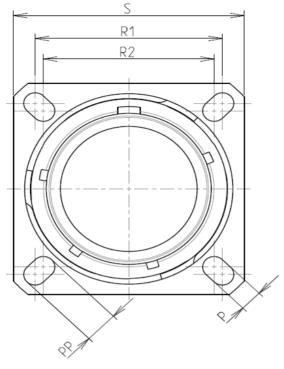

Keying Shown as example

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE: 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8 μm minimum				
-Durability	: 500 Mating cycles				
-Delivered with Souriau contacts and Accessories					
-Temperature Range	_∶ -65°C to +175°C				
-Salt Spray	: 500 hours				

: 37.81 g ± 10%

8D 0

G

17

-

W

06

F

B D

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	26.97				
R2	24.61				
S	33.3±0.3				
V	20.83+0/-1.25				
W	2.1/2.5				
Z	31.5 Max				
VV THREAD	M25x1-6g				

п	n l		D		0		ω			
2										4
					LA	YOUT SHOWN AS EX	AMPLE			3
ample Connector d Dim P	limension Nominal 3.25±0.2									
PP R1 R2 S V	4.93±0.2 26.97 24.61 33.3±0.3 20.83+0/-1.25	-	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)							
W Z	2.1/2.5 31.5 Max	1		Country Jurisdiction & Control List					2	
HREAD	M25x1-6g	1	FR Not Listed PN: 8D017W06BD						2	
			B	7-04-17	Drawing Update					
		ISS Designed F				STOMER DRAWING	MOD N°			
				TITLE Aluminium Receptacle 8D series						
		SCALE NA	-		General linear Tolerances: ±	1	NPRDS / PROJECT 859		1	
ORIENTATION : D CONTACT TYPE : SOCKET(500 Matings)		SOU	OURIAU WWW.SOURIAU.COM				This document is the property of SOURIAU it must not be reproduced or communicated without permission			
CONTACT LAYOUT : 17-06		FORMAT A3		SOURIAU DRG N° 8D017W06BD-C			SHEET 1/2			
E		1	D		С		B	A		
										_

