

PSCI

High Speed Inductive Rotor Position Sensor

Accurate feedback on the angular position, direction, and speed of the rotor shaft is essential to optimize control of the motor inverter and drive the electric engine with the best possible efficiency. The PSCI high speed inductive rotor position sensor can be mounted on the same shaft as the electric machine rotor, is immune to electromagnetic stray fields and provides accurate measurement of rotor position in a compact, light weight and fully sealed package.



KEY FEATURES

- ▶ Up to 600.000 (el) rpm speed
- ▶ Low weight and compact dimensions
- ▶ Robust to tilt, misalignment and gap variations
- ▶ True power-on sensor: excellent accuracy and precision
- ▶ Immune to stray fields, no shielding required
- ▶ End-of-shaft sensor for metallic target
- ▶ Standard version available for 6, 8, and 12 poles
- ▶ Suitable for harsh environments (fully sealed, shock, vibration)
- ▶ ASIL-C ready (redundant output available on request)
- ▶ Cost-effective alternative to traditional resolvers

APPLICATIONS

- ▶ Motor position sensing and control in electric and hybrid powertrains

TECHNICAL SPECIFICATIONS

Signal output	Analog: differential sine/cosine (1.0V to 4.0V)
Max. speed (mec)	200.000 rpm (6-pole version) 150.000 rpm (8-pole version) 100.000 rpm (12-pole version)
Accuracy	±1°el
Resolution	infinite
Propagation delay	< 4.2 μsec
Operating temperature	-40°C to +150°C (coil temperature can be > 150°C)
Rotational life	unlimited
Sealing	IP69K
Supply voltage	5V ±10%
Current	Max 15 mA; ±18V over/reverse voltage protection
Mounting torque	Max 2.2 N m
Target material	Metal

Other technical specifications available. Contact info@piher.net

PSCI

High Speed Inductive Rotor Position Sensor


PIHER *sensing* systems

Potentiometers | Hall-Effect Sensors | Inductive Sensors
Speed Sensors | Printed Electronics | Value Added Assemblies

HOW TO ORDER (Example: PSCI - 4PP - 05)

Series	Number of pole pairs	Supply Voltage
PSCI	3PP = Three 4PP = Four 6PP = Six	05 = 5V

DIMENSIONS (MM) - 8-POLE VERSION

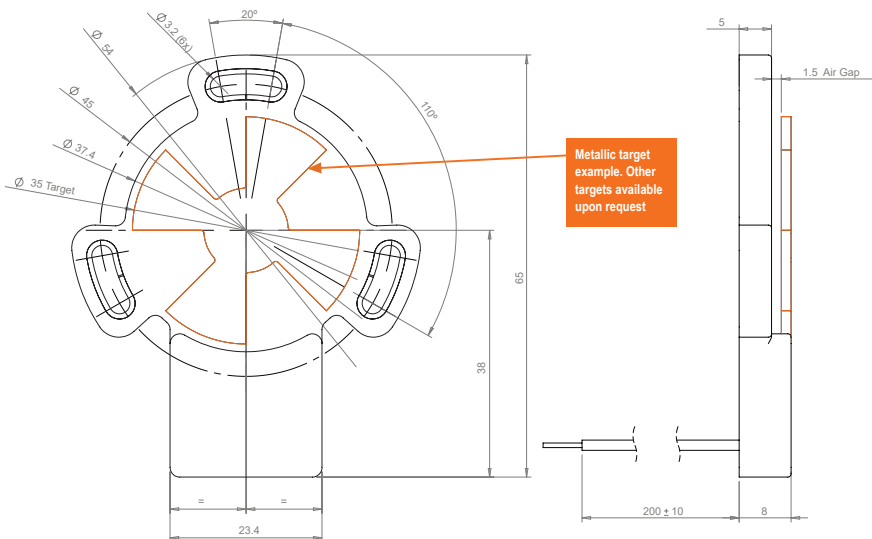

CONNECTION SCHEME

- Blue = Ground
- Yellow = Sine (+)
- White = Sine (-)
- Red = Cosine (+)
- Black = Cosine (-)
- Brown = Vcc

Wires: 0.35mm²
TXL SAE J1128



Download the STEP file here:
<https://piher.net/piher/?p=3317>

OUR ADVANTAGE

- ▶ Leading-edge innovative position sensing solutions
 - ▷ Contactless (Hall-effect and Inductive Technology)
 - ▷ Contacting (Potentiometers, Printed Electronics)
- ▶ Value added proposition
 - ▷ Engineering design-in support
 - ▷ Cable harness and connector assembly
- ▶ All our products can be customized to fit target application and customer requirement
- ▶ Capability to move seamlessly from development to true high-volume production
- ▶ A global footprint with global engineering and commercial support
- ▶ One-stop shop not limited to position sensors (temperature, pressure, gas,...) through group collaboration
- ▶ Flexibility and entrepreneurship of a medium-sized company with the backing of Amphenol Corporation



Please always use the latest updated datasheets and 3D models published on our website.

Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information. Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein. Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is responsible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information, please contact the sender immediately. For any Piher Exports, Note: All products / technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

CONTACT

Piher Sensing Systems
sales@piher.net

Europe: +34 948 820 450
Americas: +1 636 251 0855
China: +86 132 6063 0831
Asia Pacific: +65 9641 8886
India: +91 9538 686 586

Rev. 1B08/2021