


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.  
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED  
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.  
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

**RFB-1131**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	4/26/99	JDMc

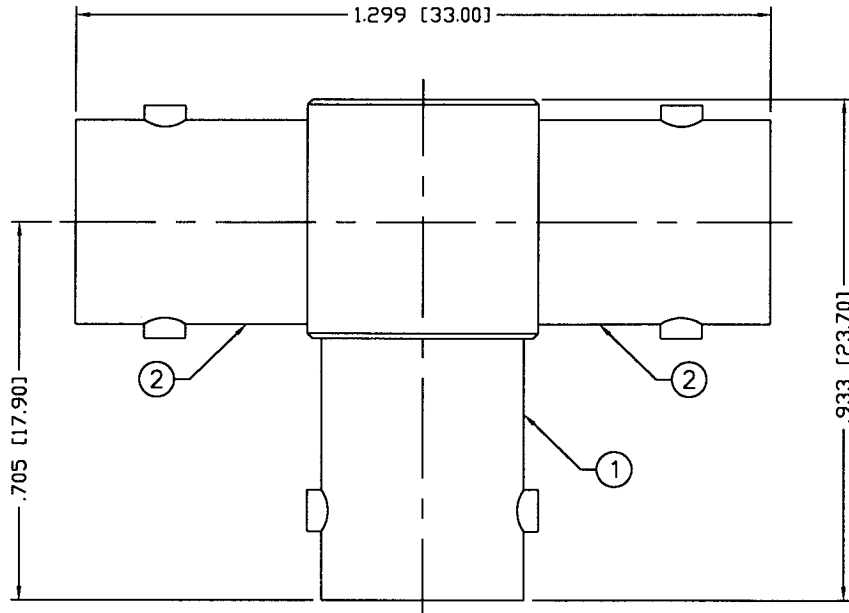

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-4 GHz  
 WORKING VOLTAGE: 500 V rms @ sea level  
 TEMPERATURE RANGE: -65°C TO 165°C  
 INSULATION RESISTANCE: 5k M Ohms min.

1	BODY	1	BRASS	NICKEL, 100μ"
2	PRESS BODY	2	BRASS	NICKEL, 100μ"
3	INSULATOR	2	PTFE	----
4	CONTACT	1	PHOS BRONZE	SILVER 200μ"
5	CONTACT	1	PHOS BRONZE	SILVER 200μ"
6	INSULATOR	1	PTFE	----
7	LOCK RING	1	BRASS	NICKEL, 100μ"
8	SLEEVE	1	DELTRIN	----
9				
10				
11				
12				
13				
14				
#	DESCRIPTION	QTY	MATERIAL	FINISH

008974		
DRAWN	C. ZUNIGA	11/5/03
CHECKED	<i>[Signature]</i>	11/5/03
ORJ DRAWN	C. ZUNIGA	11/5/03
APPROVALS	DATE	

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]  
 UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
----------	----------

7610 MIRAMAR RD  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX

**RF connectors**  
 DIVISION OF RF INDUSTRIES, LTD.

## BNC TRIPLE JACK

"T" ADAPTER

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFB-1131	-

SCALE: NTS      CAD FILE      OUTLINE      SHEET 1 OF 1