


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00003	Overmold, PVC, black	1	

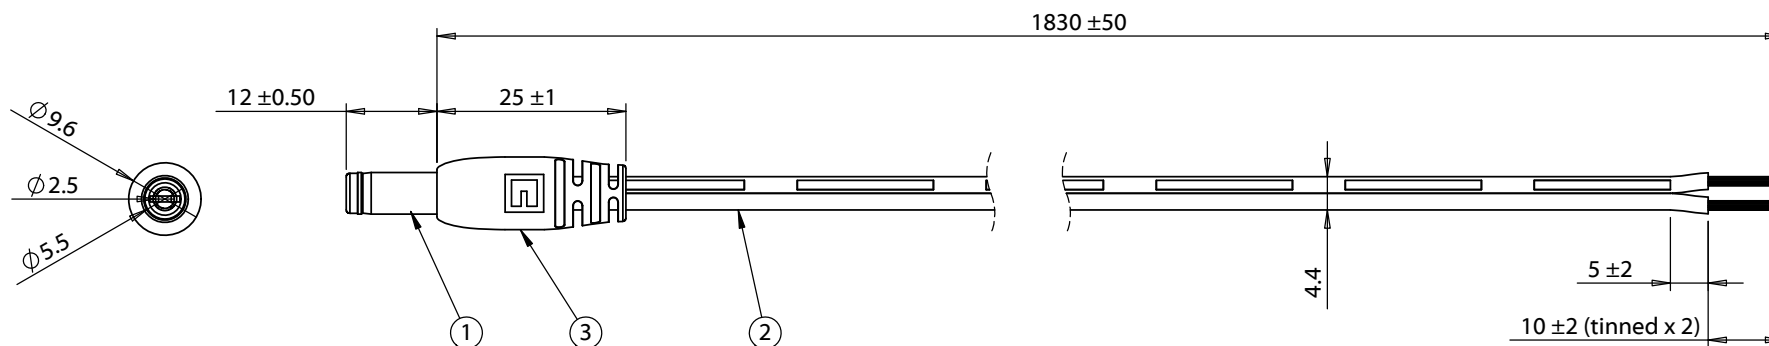

Wiring diagram	
50-00026	Wire Color
Center	Black with stripe
Sleeve	Black

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>
A	6/28/2012	Initial release	GL 2015.11.03 09:11:11 -08'00'	RoHS compliant	
			AG 2015.11.10 15:14:12 -08'00'	Function test: no open, no reversed polarity, no short circuit, no INT	
			DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	7A, 12Vdc Functionally equivalent components may be used	
				DESCRIPTION: Cable, 1830 mm, 5.5x2.5x12 mm 50-00026 dc plug to stripped tinned, 18 AWG, 30-00007 wire	SIZE A PART NUMBER 10-01060
					SCALE: 1:1 WEIGHT: SHEET 1 OF 1