



┵

ISSUE NUMBER	
ORIGINAL	1

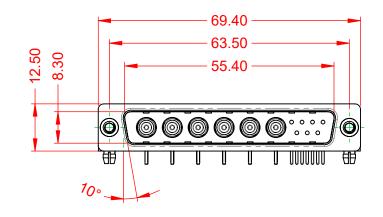




.XX ±0.13 .XXX ±0.05

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	75Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
(IF PRESENT) SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.

WITHSTANDING VOLTAGE:

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19
	CHECKED:	DATE:		
EDAG INC TORONTO, ONTARIO CANADA	ARE THE PROPERTY OF EDAC INC.,AND NTO, ONTARIO CANADA MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
		DRAWING NUMBER: 629-13W	8640-7TB	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-13W	∂640-7TB	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

