
工	G	11	т	C C







Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:


SHELL SIZE : 11

Н

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium				
-Shell Plating	: Olive drab Cadmium				
-Insulator	: Thermoplastic				
-Contacts	: Copper Alloy				
-Seals & Grommet	: Silicon Elastomer				
-Contact Plating	: Gold over copper Alloy 0.8µm minimun				
-Durability	: 500 Mating cycles				
-Delivered without Souriau contacts					
-Temperature Range	: -65℃ to +175℃				
-Salt Spray	: 500 hours				

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

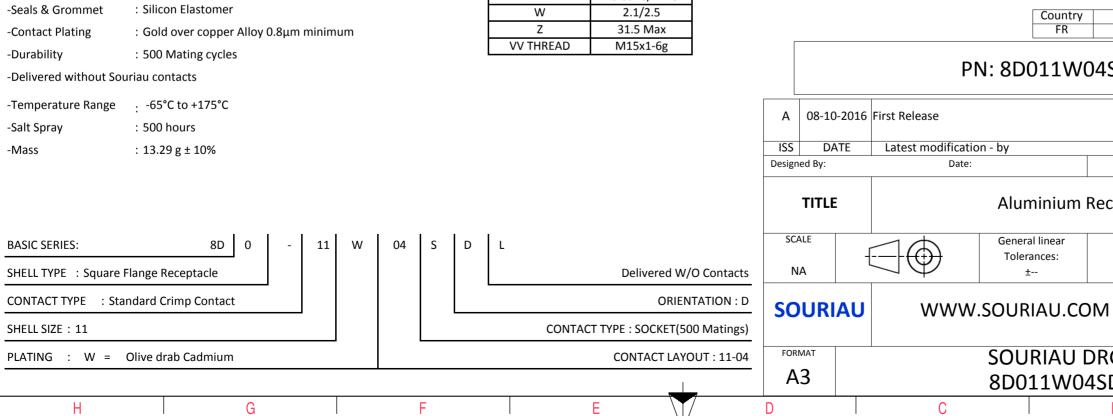

0		Φ		A		
LAYOUT SHOWN AS EXAMPLE						
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ <b>PN: 8D011W04SDL</b>						2
First Release						
Latest modificatio Date:	n - by		CUSTO	MER DRAWING	MOD N°	<u> </u>
Aluminium Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPF	RDS / PROJECT 859		1
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
	DRG N° 4SDL-C			SHEET 1/2		
С		B		A		J

-	Ŧ	۵	п –	m	D	0	
		Contact Layout				Panel C	utou
4	-×_	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Shell Arrangement Numt size no. cont size 4	X-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)           - 0.65 (1.65)         - 0.65 (1.65)	]			ØA ØT	
ω						Dim ØA ØAA R1 ØT	
	+					SOURIAU shall not be liable fo due to a use of the Product the Specifications issued by eith	ts wh
N						(professional recomme	ountr FR
					A 08-10-20 ISS DATE Designed By:	116 First Release	
<u> </u>					TITLE SCALE NA	Alumin General line Tolerances ±	ear
						SOURI	٩U
	Н	G	F	E	A3	8D011	W(

