
CARACTERISTICS -Standard: Based on MIL-DTL-38999 Series III -Shell Material ::::::::::::::::::::::::::::::::::::					
Standard : Based on MIL-DTL-38999 Series III Dim Nominal ØS SS S Max -Shell Material : Composite 25 Max 25 Max -Shell Plating : Nickel 21 31.5 Max VV THREAD M15x1-6g -Insulator : Thermoplastic VV THREAD M15x1-6g Gue to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) -Seals & Grommet : Silicon Elastomer Countart Plating : Gold over copper Alloy 0.8µm minimum -Ourability : 500 Mating cycles - - - -Delivered with Souriau contacts and Accessories - - - - -Temperature Range : - 65°C to +200°C - - - - -Salt Spray : 2000 hours - - - - MOD N Designed By: Date: CustoMER DRAWING MOD N Designed By: Date: CustoMER DRAWING MOD N			LAYOUT SHOWN AS EXAMPLE		
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C -Salt Spray : 2000 hours A 16-10-2016 First Release ISS DATE Latest modification - by Delivered By: Date: CUSTOMER DRAWING	-Shell Material: Composite-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer	DimNominalØS25 MaxZ'31.5 Max	due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)		
-Salt Spray : 2000 hours -Salt Spray : 2000 hours ISS DATE Latest modification - by MOD N Designed By: Date: CUSTOMER DRAWING	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories		PN: 8D511M04HD		
TITLE Composite Plug 8D series			ISS DATE Latest modification - by MOD	N°	
			TITLE Composite Plug 8D series		
BASIC SERIES: 8D 5 - 11 M 04 H D SHELL TYPE Plug with RFI Shielding - 11 M 04 H D	SHELL TYPE : Plug with RFI Shielding		NA Tolerances: ± 859 This document is the property of		
CONTACT TYPE : Standard Crimp Contact ORIENTATION : D SOURIAU SOURIAU SOURIAU SHELL SIZE : 11 CONTACT TYPE : PIN (1500 Matings) SOURIAU SOURIAU SOURIAU SOURIAU			SOURIAU WWW.SOURIAU.COM SOURIAU it must not be reproduced or		
PLATING : M = Nickel CONTACT LAYOUT : 11-04 FORMAT SOURIAU DRG N° SHEET A3 8D511M04HD-C 1/2	PLATING : M = Nickel	CONTACT LAYOUT : 11-04	JUUNAU DINU N		

	т	<u>م</u>	I II	п	D	O
ſ				I	I	1
		Contact Layout				
4	×	↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔ ↔				
	Conta positi ID A B C D Shell Arrangement Numb	X-axis (mm) Y-axis (mm) +.065 (1.65) +.065 (1.65) +.065 (1.65) 065 (1.65) 065 (1.65) 065 (1.65) 065 (1.65) +.065 (1.65)	3			
	Shell Arrangement Numb size no. conta 11 -4 4	acts contacts rating location				
ω						
	1					
	F					SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR
						PN: 8D511
					A 16-10-20	116 First Release
_					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Comp
					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.
					FORMAT A3	SOURIAL
L	Н	G	F	E	D	8D511M

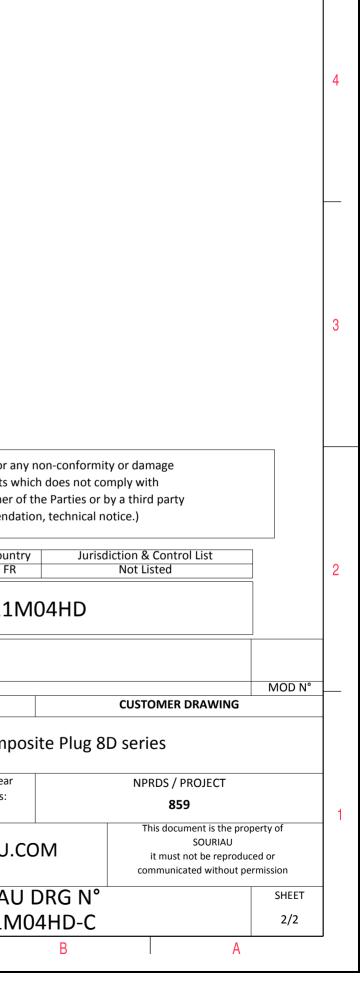

 \triangleright

σ