



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-03-16	Allen Pan	Rev.02 To Rev.A

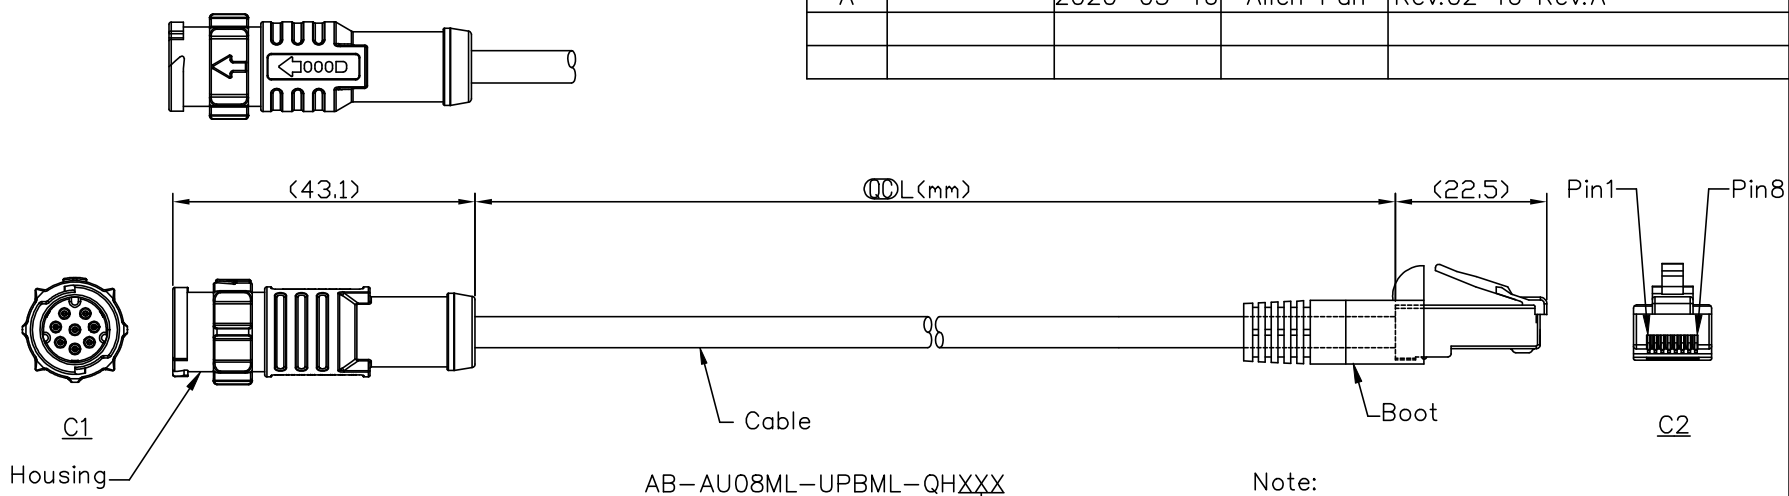

AB-AU08ML-UPBML-QHXXX
 XXX: 0.5~99Meters
 A05: 0.5Meter
 001: 01Meter
 002: 02Meters
 :
 :
 099: 99Meters

- Note:
- * (L) Important Dimension To Check.
 - * C1
 Waterproof Rate: IP68, Mated.
 Housing: Thermoplastic, Black.
 Pin: Copper Alloy, Gold Plated.
 - * C2
 Plug: RJ45 Plug, 8P8C.
 - * Cable: CAT-5E, UTP, 24#*4P.
 PVC Jacket, OD=6mm, Black.
 - * Cable Length Tolerance:
 ≤0.3M: +25/-0mm.
 >0.3M~1.5M: +60/-0mm.
 >1.5M~3M: +120/-0mm.
 >3M~5M: +160/-0mm.
 >5M~10M: ±100mm.
 >10M~20M: ±200mm.
 >20M~30M: ±300mm.
 >30M~100M: ±500mm.



8	Brown	棕	8	Twist 對線
7	White/Brown	白/棕	7	
6	Green	綠	6	
5	White/Blue	白/藍	5	Twist 對線
4	Blue	藍	4	
3	White/Green	白/綠	3	Twist 對線
2	Orange	橙	2	
1	White/Orange	白/橙	1	
C1	Wire Color		C2	

UNIT: mm		TITLE XLOK, A-2A, DOUBLE-ENDED, M, 08P
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. A	SIZE A4	◎: Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-03-16
DWG NO AB-AU08ML-UPBML-QHXXX	CHECKED BY Sam Ho	DATE 2020-03-16
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-03-16