


.XXX ±0.05


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

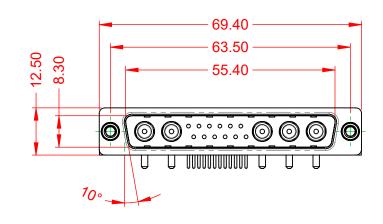




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTAC
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	$5000M\Omega$ min.

DIELECTRIC WITHSTANDING VOLTAGE:

СТ

1000V AC rms



		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-17W5240-1NE		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVIC	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-17W	5240-1NE	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

