

NOTES:


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


.X ±0.25 .XX ±0.13

.XXX ±0.05

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms




			SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION	COMBINATION D-SUB		DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
YOUR CONNECTION T	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-2WK2240-3TD		ISSUE	
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-2WK	2240-3TD	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

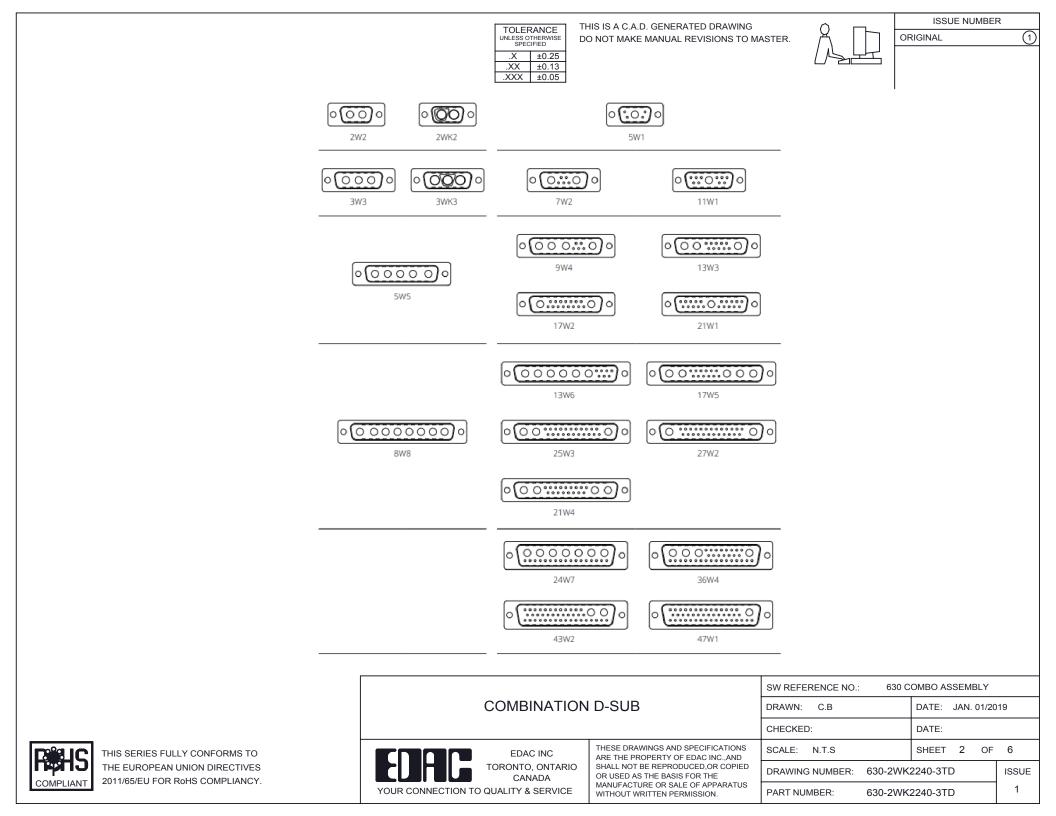



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female

17W2 Male/Female



21W4 Male/Female




ISSUE NUMBER

ORIGINAL


 $\overline{(1)}$

5W5 Male



PCB EDGE






PCB EDGE




PCB EDGE

2.77 PCB EDGE

27W2 Male/Female




21W1 Male/Female




		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINATION	COMBINATION D-SUB			DATE: JAN. 01/2019	
			CHECKED:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S		SHEET 3 OF	4
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 6	: 630-2WK2240-3TD		ISSUE
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 63	30-2WK2	240-3TD	1


5W5 Female

COMPLIANT




8W8 Female






CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.
















13W3 Male





25W3 Male







.X ±0.25 .XX

±0.13 .XXX ±0.05

9W4 Female



36W4 Female

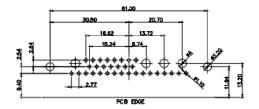

13W6 Male





22.18

2.77

20.78

13W6 Female

43W2 Female



17W5 Male






COMBINATION D-SUB


EDAC INC

TORONTO, ONTARIO


CANADA




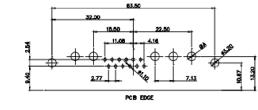

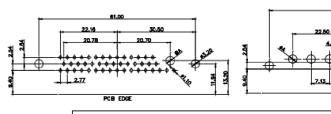


YOUR CONNECTION TO QUALITY & SERVICE

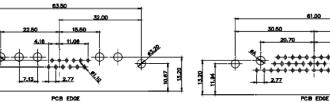

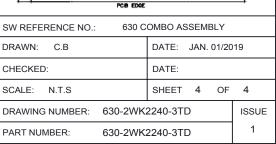



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



20.7

13.72

PCB EDGE



PCB EDGE

24.77



THESE DRAWINGS AND SPECIFICATIONS

SHALL NOT BE REPRODUCED, OR COPIED

MANUFACTURE OR SALE OF APPARATUS

ARE THE PROPERTY OF EDAC INC..AND

OR USED AS THE BASIS FOR THE

WITHOUT WRITTEN PERMISSION.

31.75